

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING

APPLICATION FOR PERMIT TO DRILL, DEEPEN

1a. TYPE OF WORK DRILL ☒ DEEPEN ☐ RE-ENTER ☐
 1b. TYPE OF WELL
 OIL ☒ GAS ☐ OTHER ☐ SINGLE MULTIPLE
 ZONE ☒ ZONE ☐

2. NAME OF OPERATOR

Newfield Production Company

3. ADDRESS AND TELEPHONE NUMBER:

Route #3 Box 3630, Myton, UT 84052

Phone: (435) 646-3721

4. LOCATION OF WELL (FOOTAGE)

At Surface NW/SW (Lot #1) 5926284 390' FSL 642' FWL 40.10396
 At proposed Producing Zone 44396514 - 109.91324

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

Approximately 29.1 miles southeast of Myton, UT

15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any)

Approx. 390' f/lse line and NA' f/unit line

18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR ON THIS LEASE, FT.

NA

16. NO. OF ACRES IN LEASE

NA

17. NO. OF ACRES ASSIGNED TO THIS WELL

40

19. PROPOSED DEPTH

6600'

20. ROTARY OR CABLE TOOLS

Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

4902' GL

22. APPROX. DATE WORK WILL START*

3rd Quarter 2007

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT/FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4	8 5/8	24#	290'	155 sx +/- 10%
7 7/8	5 1/2	15.5#	TD	275 sx lead followed by 450 sx tail
				See Detail Below

DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give date on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

*The actual cement volumes will be calculated off of the open hole logs, plus 15% excess:

SURFACE PIPE - 155 sx Class G Cement + I 10%, w/ 2% CaCl₂ & 1/4#/sk Cello-flakeWeight: 15.8 PPG YIELD: 1.17 Cu Ft/sk H₂O Req: 5 gal/sk

LONG STRING - Lead: Premium Lite II Cement + 3lbs/sk BA-90 + 3% KCl + .25 lbs/sk Cello Flake + 2 lbs/sk Kol Seal +

10% Bentonite + .5% Sodium Metasilicate

Weight: 11.0 PPG YIELD: 3.43 Cu Ft/sk H₂O Req: 21.04 gal/sk

Tail: 50-50 Poz-Class G Cement + 3% KCl + .25 lbs/sk Cello Flake + 2% Bentonite + .3% Sodium Metasilicate

Weight: 14.2 PPG YIELD: 1.59 Cu Ft/sk H₂O Req: 7.88 gal/sk

24.

Name & Signature

Mandie Crozier

Title:

Regulatory Specialist

Date:

5/15/2007

(This space for State use only)

API Number Assigned:

43047-39333

APPROVAL:

RECEIVED

MAY 17 2007

DIV. OF OIL, GAS & MINING

*See Instructions On Reverse Side

T4S, R1E, U.S.B.&M.

S89°56'W - 80.27 (G.L.O.)

NEWFIELD PRODUCTION COMPANY

WELL LOCATION, WELL 12-29-4-1,
LOCATED AS SHOWN IN THE NW 1/4 SW
1/4 (LOT 1) OF SECTION 29, T4S, R1E,
U.S.B.&M. DUCHESNE COUNTY, UTAH.

Uintah



Notes:

1. The Proposed Well head bears N75°20'40"E 726.04' from the Mile Marker 10.
2. Footages are at right angles from the section lines.


THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS
PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS
MADE BY ME OR UNDER MY SUPERVISION AND THAT
THE SAME ARE TRUE AND CORRECT TO THE BEST OF
MY KNOWLEDGE AND BELIEF. No. 189377

Stacy W. Stewart
STACY W. STEWART
REGISTERED LAND SURVEYOR
REGISTRATION No. 189377
STATE OF UTAH

TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501

DATE SURVEYED: 05-09-07	SURVEYED BY: D.S.
DATE DRAWN: 05-10-07	DRAWN BY: T.C.J
REVISED:	SCALE: 1" = 1000'

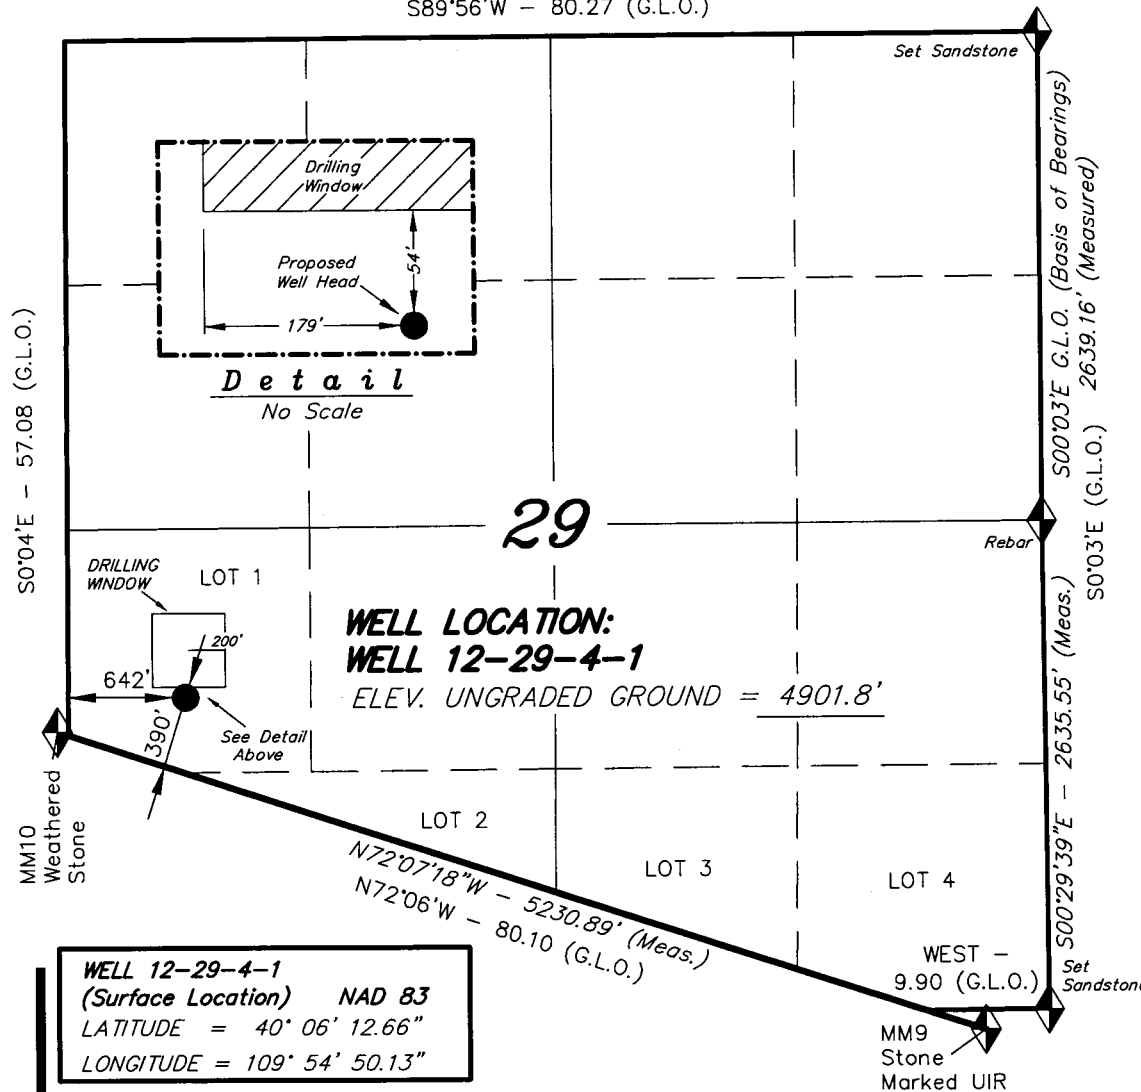

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV;
U.S.G.S. 7-1/2 min QUAD (PARIETTE DRAW SW)

NEWFIELD PRODUCTION COMPANY
UTE TRIBAL #12-29-4-1
NW/SW (LOT #1) SECTION 29, T4S, R1E
~~Duchesne~~ COUNTY, UTAH
Uintah

TEN POINT DRILLING PROGRAM

1. GEOLOGIC SURFACE FORMATION:

Uinta formation of Upper Eocene Age

2. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:

Uinta	0 – 1750'
Green River	1750'
Wasatch	6600'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:

Green River Formation 1750' – 6600' – Oil

4. PROPOSED CASING PROGRAM:

Surface Casing: 8-5/8" J-55 24# w/ST&C collars; set at 290' (New)
Production Casing: 5-1/2" J-55, 15.5# w/LT&C collars; set at TD (New or used, inspected).

5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to Exhibit C for a diagram of BOP equipment that will be used on this well.

6. TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:

A fresh water/polymer system will be utilized to drill the well. If necessary, to control formation fluids, the system will be weighted with the addition of bentonite gel, and if conditions warrant, barite. This fresh water system typically will contain Total Dissolved Solids (TDS) of less than 3000 PPM. Neither potassium chloride nor chromates will be utilized in the fluid system. The anticipated mud weight is 8.4 ppg and weighted as necessary for gas control.

AIR DRILLING

In the event that the proposed location is to be "Air Drilled", Newfield requests a variance to regulations requiring a straight run blooie line. Newfield proposes that the flowline will contain two (2) 90-degree turns. Newfield also requests a variance to regulations requiring an automatic igniter or continuous pilot light on the blooie line. Newfield requests authorization to ignite as needed, and the flowline at 80'.

Newfield Production Company requests that the spark arrest, exhaust, or water cooled exhaust be waived under the Special Drilling Operations of Onshore Order #2.

MUD PROGRAM

Surface – 3200'
3200' – TD'

MUD TYPE

fresh water system
fresh water system

From surface to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCL substitute additive. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite. No chromate additives will be used in the mud system.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 290' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

The anticipated maximum bottom hole pressure is 1800 psi. It is not anticipated that abnormal temperatures will be encountered; or that any other abnormal hazards such as H2S will be encountered in this area.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the third quarter of 2007, and take approximately seven (7) days from spud to rig release.

NEWFIELD PRODUCTION COMPANY
UTE TRIBAL #12-29-4-1
NW/SW (LOT #1) SECTION 29, T4S, R1E
~~DUCHESNE~~ COUNTY, UTAH
Ute Tribal
THIRTEEN POINT SURFACE PROGRAM

1. EXISTING ROADS

See attached **Topographic Map "A"**

To reach Newfield Production Company well location site Ute Tribal 12-29-4-1 located in the NW¼ SW¼ Section 29, T4S, R1E, S.L.B. & M., Duchesne County, Utah:

Proceed in a southeasterly direction out of Myton, approximately 16.9 miles to the junction of this road and an existing road to the northeast; proceed northeasterly approximately 1.8 miles to it's junction with an existing road to the north; proceed northeasterly and then northwesterly approximately 6.6 miles to its junction with an existing road to the west; proceed westerly approximately 1.0 miles to it's junction with the beginning of an existing two track road to be upgraded; proceed westerly approximately 7,030' to the junction of the two track road with the beginning of the proposed access road to the southwest; proceed in a southwesterly direction approximately 7,670' to the propose well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

2. PLANNED ACCESS ROAD

Approximately 7,670' of access road is proposed. See attached **Topographic Map "B"**.

The proposed access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is deemed necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%.

There will be no culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

Refer to **EXHIBIT B**.

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck for drilling purposes from the following water sources:

Johnson Water District
Water Right: 43-10136

Neil Moon Pond
Water Right: 43-11787

Maurice Harvey Pond
Water Right: 47-1358

Newfield Collector Well
Water Right: 41-3530 (A30414DV, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E) or at State of Utah approved surface disposal facilities.

8. **ANCILLARY FACILITIES:**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT:**

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

- a) **Producing Location**

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

b) **Dry Hole Abandoned Location**

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP:** Rex and LaRue Lamb Trust, Duchesne County, Utah. See attached Surface Use Agreement.

12. **OTHER ADDITIONAL INFORMATION:**

- a) Newfield Production Company is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, Newfield is to immediately stop work that might further disturb such materials and contact the Authorized Officer.
- b) Newfield Production will control noxious weeds along rights-of-way for roads, pipelines, well sites or other applicable facilities. On State administered land it is required that a Pesticide Use Proposal shall be submitted and given approval prior to the application of herbicides or other possible hazardous chemicals.
- c) Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on State Lands after the conclusion of drilling operations or at any other time without State authorization. However, if State authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

The Archaeological Report Waiver for this location is attached.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the Ute Tribal 12-29-4-1, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the Ute

Tribal 12-29-4-1 Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

The State office as well as the Ute Tribe Energy and Mineral Department shall be notified upon site completion prior to moving on the drilling rig.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative


Name: Kim Kettle
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification

Please be advised that Newfield Production Company is considered to be the operator of well #12-29-4-1, NW/SW Section 29, T4S, R1E, Duchesne County, Utah and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by US Specialty Insurance #B002792.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

5/15/07
Date


Mandie Crozier
Regulatory Specialist
Newfield Production Company

MEMORANDUM
of
EASEMENT, RIGHT-OF-WAY
and
SURFACE USE AGREEMENT

This Easement, Right-of-Way and Surface Use Agreement ("Agreement") is entered into this 22nd day of March, 2007 by and between **Rex and LaRue Lamb Trust, Karl Lamb, trustee whose address is PO Box 374, Myton Utah 84052** ("Surface Owner," whether one or more) and Newfield Production Company, a Texas corporation ("NEWFIELD"), with offices at 1401 17th Street, Suite #1000, Denver, Colorado 80202, covering certain lands, (the "Lands") situated in Duchesne County, Utah described as follows:

Township 4 South, Range 1 East

NWSE, NWSE, NESE, Lot 1, Lot 2, Lot 3, Lot 4 Sec 29

NWNE, NENW, NWNW, SENW, SWNE, SENE, Lot 1, Lot 2, Lot 3, Lot 4 Sec 34

Uintah County, Utah

being, 569 acres more or less,

and associated roads and pipeline routes beginning at each wellsite and traversing the lands as shall be agreed upon prior to the construction of same.

For and in consideration of the sum of ten dollars (\$10.00), and other valuable consideration, the receipt and sufficiency of which are hereby acknowledged, the undersigned hereby agree to the terms and provisions set forth as follows:

1. Compensation for Well; Release of All Claims

NEWFIELD shall pay to Surface Owner the sum as set forth in and according to the terms of that certain Letter Agreement for Easement, Right-of Way and Surface Use by and between Surface Owner and NEWFIELD, dated April 13, 2007, as full payment and satisfaction for any and all detriment, depreciation, injury or damage of any nature to the Lands or growing crops thereon that may occur as a result of NEWFIELD's drilling or completion operations or its continuing activities for the production or transportation of oil, gas, or other hydrocarbons or products associated with the foregoing including, but not limited to, surface use, access, pipelines, gathering lines, pipeline interconnections, and any and all other reasonable or customary uses of land related to said operations or activities.

2. Grant of Right of Way and Easement

Surface Owner hereby grants, bargains, leases, assigns, and conveys to NEWFIELD an easement and right-of-way for the purpose of construction, using and maintaining access roads, locations for surface equipment and subsurface gathering lines for each well drilled upon the Lands, pipelines, and pipeline interconnections for two years from date of this agreement and so long thereafter as NEWFIELD's oil and gas leases remain in effect.

This Agreement shall be binding upon the respective heirs, executors, administrators, successors, and assigns of the undersigned.

These Parties hereto have executed this document effective as of the day first above written.

REX AND LARUE LAMB TRUST


NEWFIELD PRODUCTION COMPANY

By: Karl Lamb
Karl Lamb, Trustee

By: _____
Gary D. Packer, President

STATE OF UTAH)
)ss
COUNTY OF Duchesne)

This instrument was acknowledged before me this 13th day of April, 2007 by Karl Lamb, as Trustee of the Rex and LaRue Lamb Trust.



Kalecia C. Fowler
Notary Public

My commission expires Nov 15, 2010

STATE OF COLORADO)
)ss
COUNTY OF Denver)

This instrument was acknowledged before me this _____, 2007 by Gary D. Packer, as President of Newfield Production Company, a Texas corporation, on behalf of the corporation.

Witness my hand and official seal.



Notary Public

My commission expires _____

NEWFIELD PRODUCTION COMPANY

WELL 12-29-4-1

Section 29, T4S, R1E, U.S.B.&M.

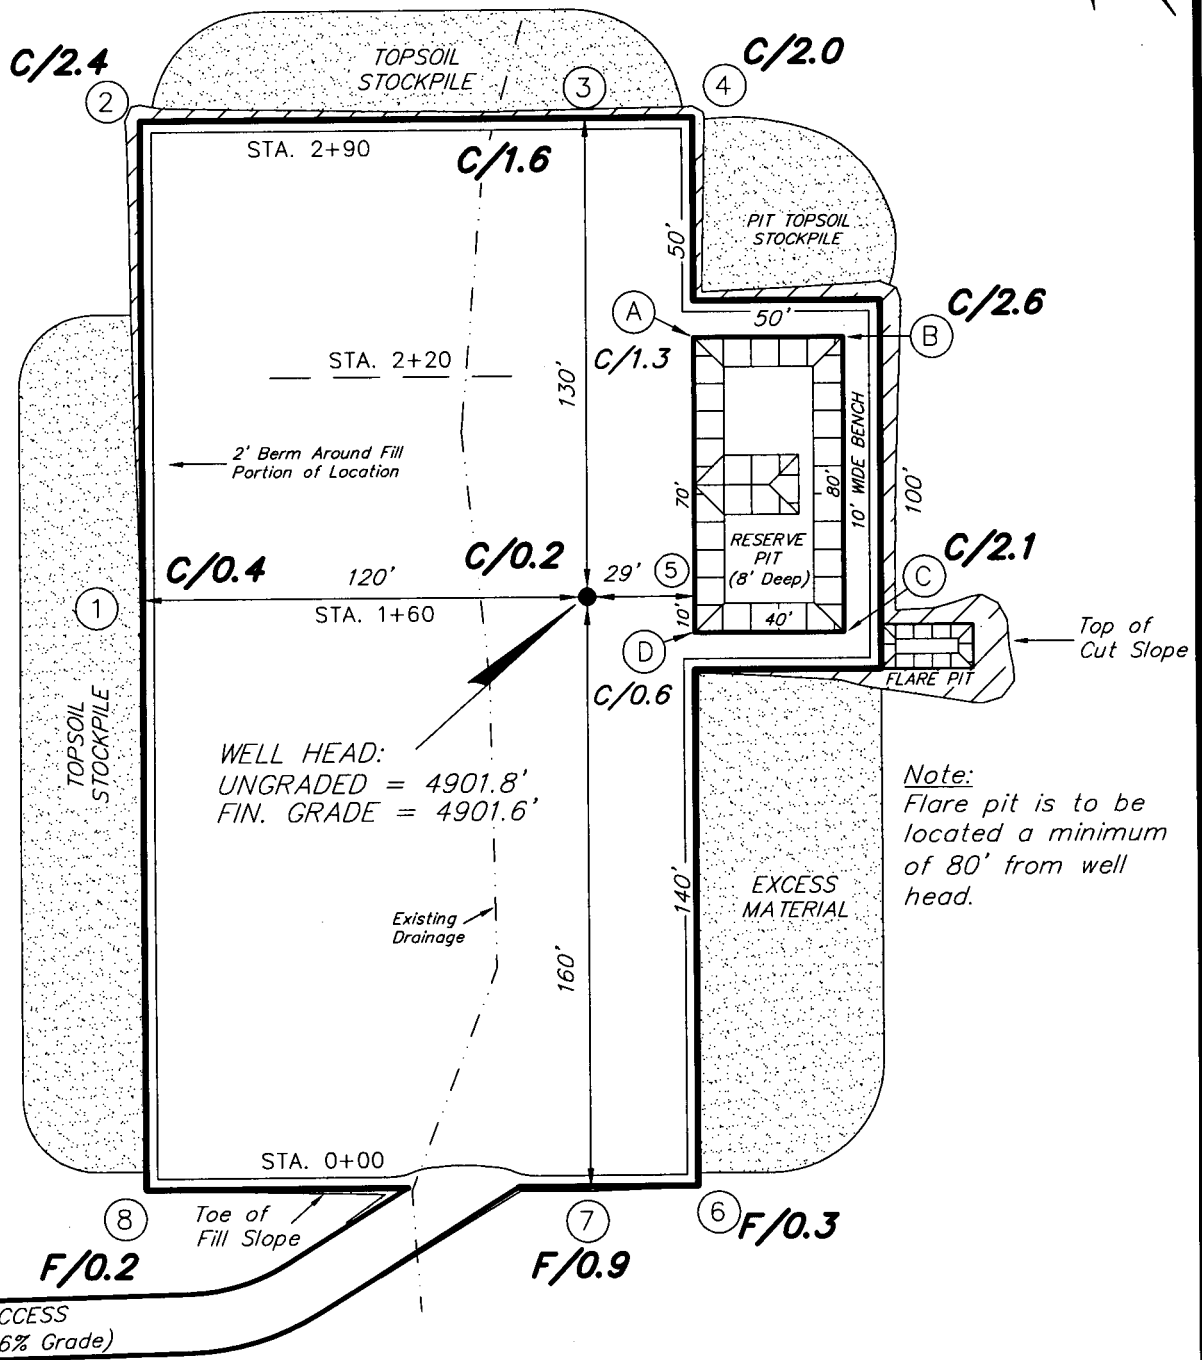

REFERENCE POINTS

180' SOUTHWESTERLY = 4903.9'
230' SOUTHWESTERLY = 4904.2'

SURVEYED BY: D.S.

SCALE: 1" = 50'

DRAWN BY: T.C.J.





DATE: 05-10-07

Tri State
Land Surveying, Inc.

(435) 781-2501

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD PRODUCTION COMPANY
CROSS SECTIONS
WELL 12-29-4-1

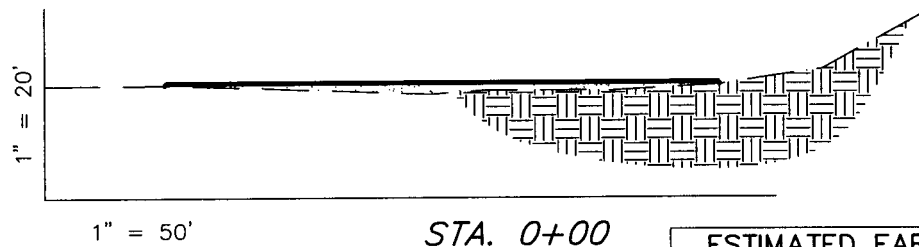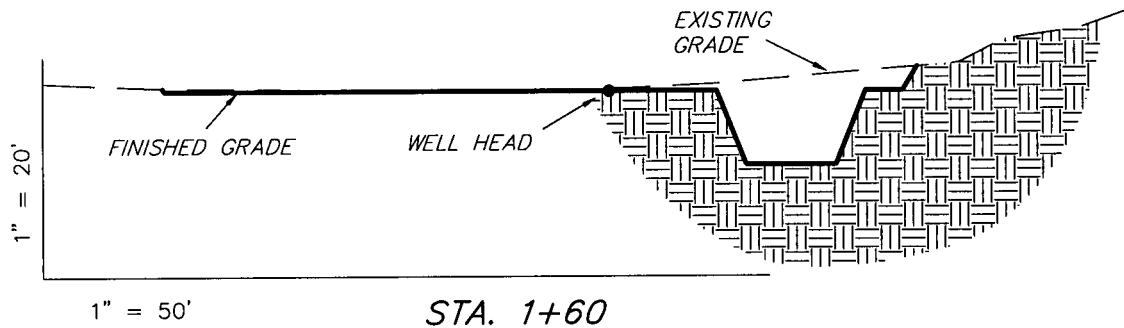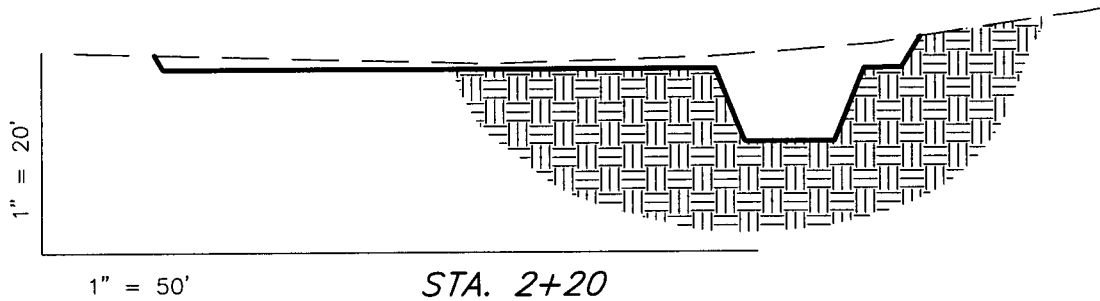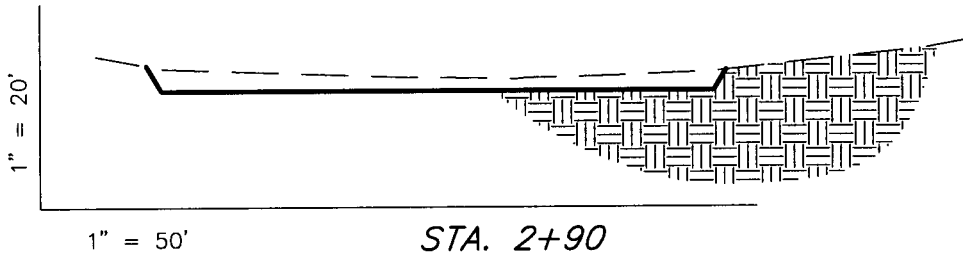

NOTE:
 UNLESS OTHERWISE NOTED
 ALL CUT/FILL SLOPES ARE
 AT 1.5:1

ESTIMATED EARTHWORK QUANTITIES (No Shrink or swell adjustments have been used) (Expressed in Cubic Yards)				
ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	740	740	Topsoil is not included in Pad Cut	0
PIT	640	0		640
TOTALS	1,380	740	940	640

SURVEYED BY: D.S.

SCALE: 1" = 50'

DRAWN BY: T.C.J.

DATE: 05-10-07



(435) 781-2501

Tri State
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD PRODUCTION COMPANY

TYPICAL RIG LAYOUT

WELL 12-29-4-1

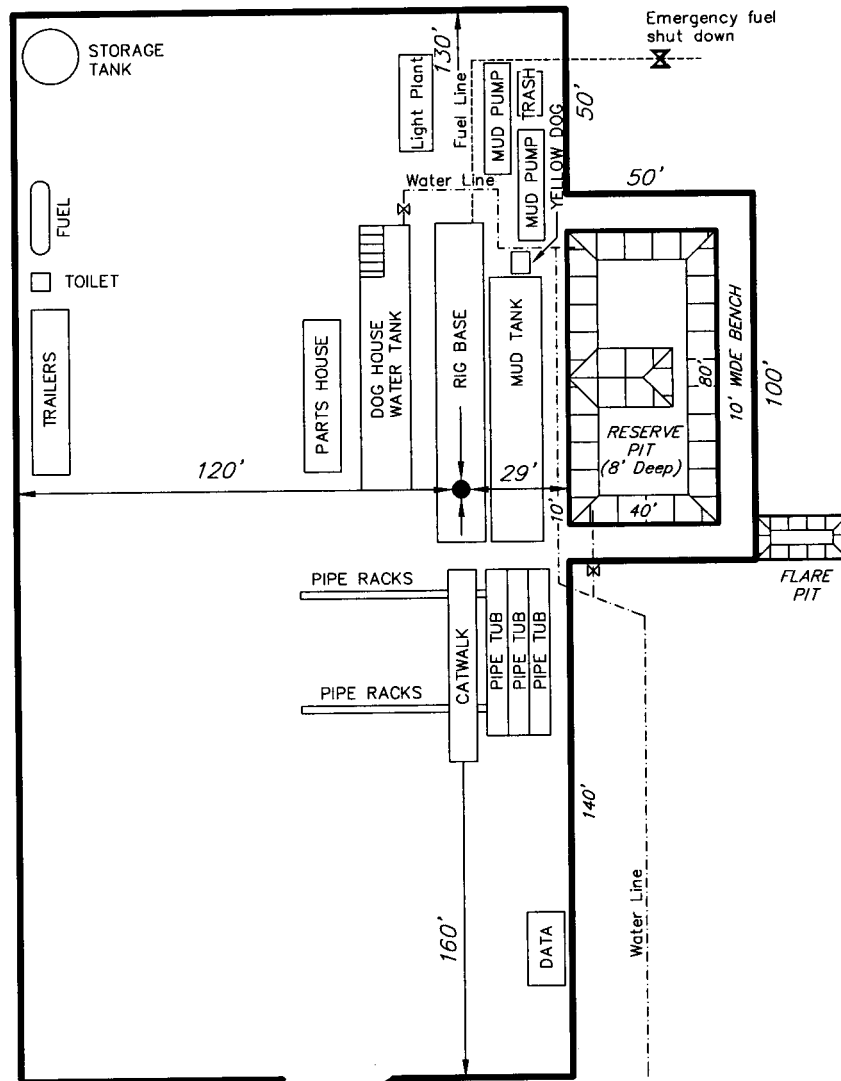

PROPOSED ACCESS
ROAD (Max. 6% Grade)


SURVEYED BY: D.S.

SCALE: 1" = 50'

DRAWN BY: T.C.J.

DATE: 05-10-07

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078
(435) 781-2501

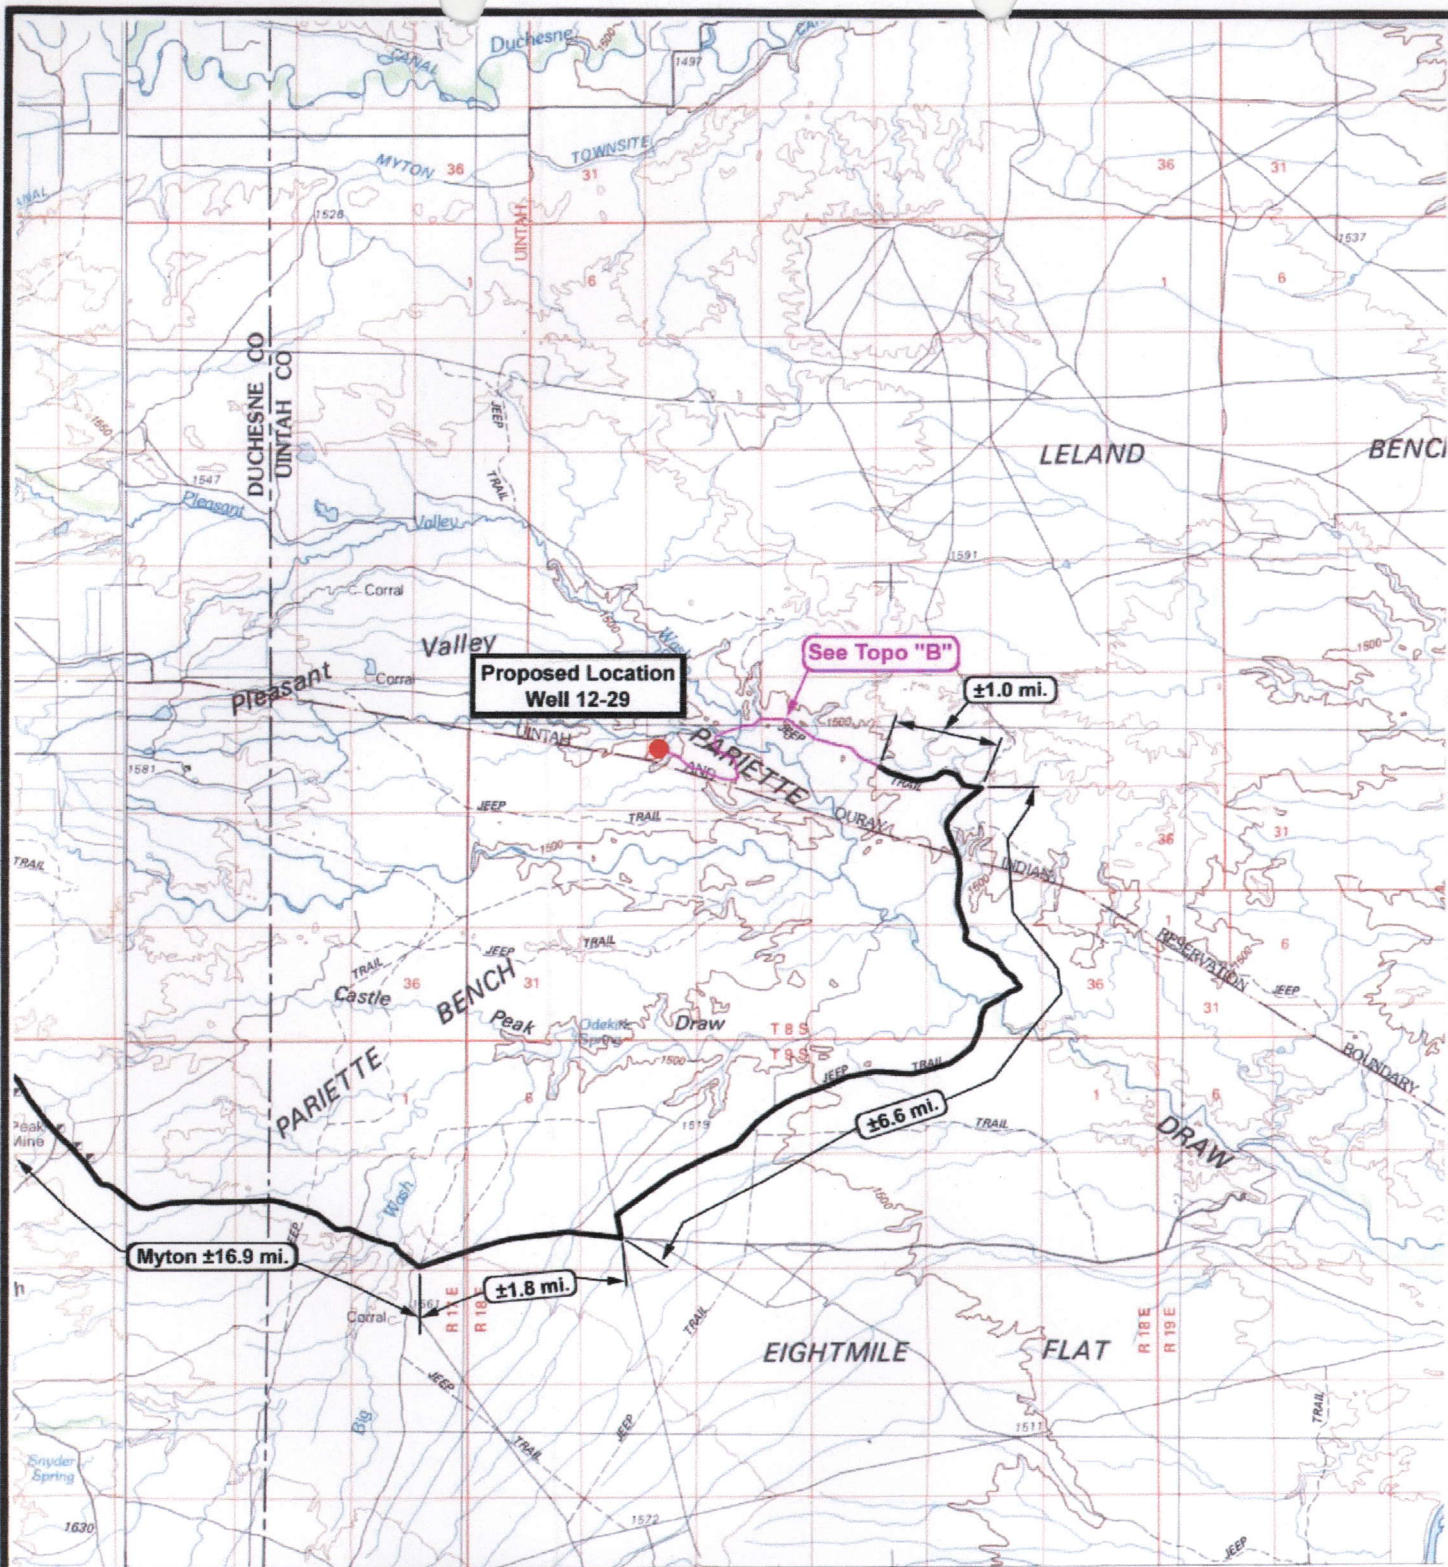

NEWFIELD
Exploration Company

Well 12-29-4-1
SEC. 29, T4S, R1E, U.S.B.&M.


Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078


SCALE: 1 = 100,000
DRAWN BY: mw
DATE: 04-18-2007


Legend

Existing Road
Proposed Access

TOPOGRAPHIC MAP
"A"

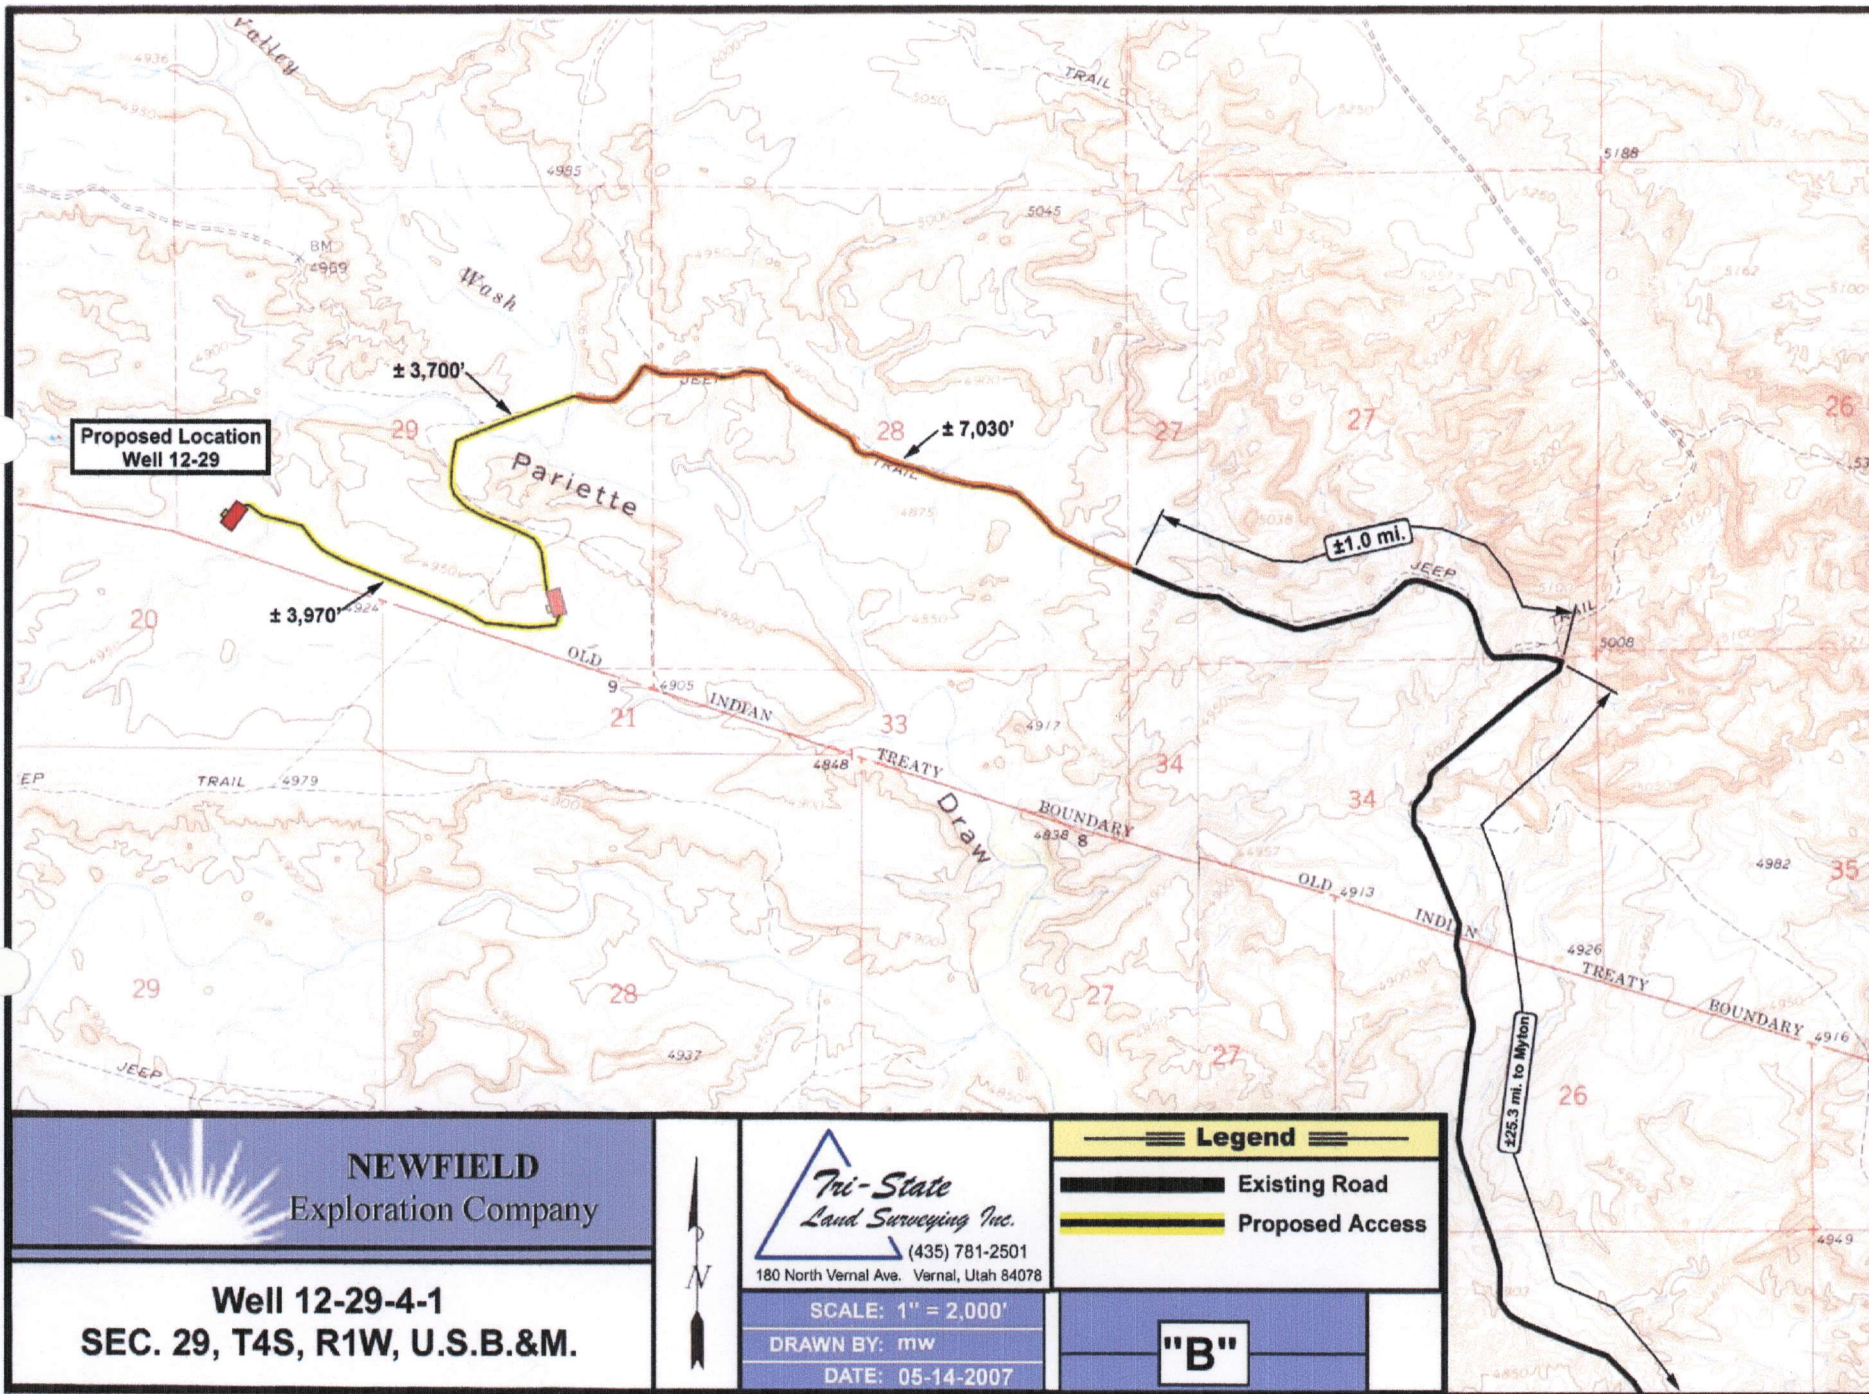

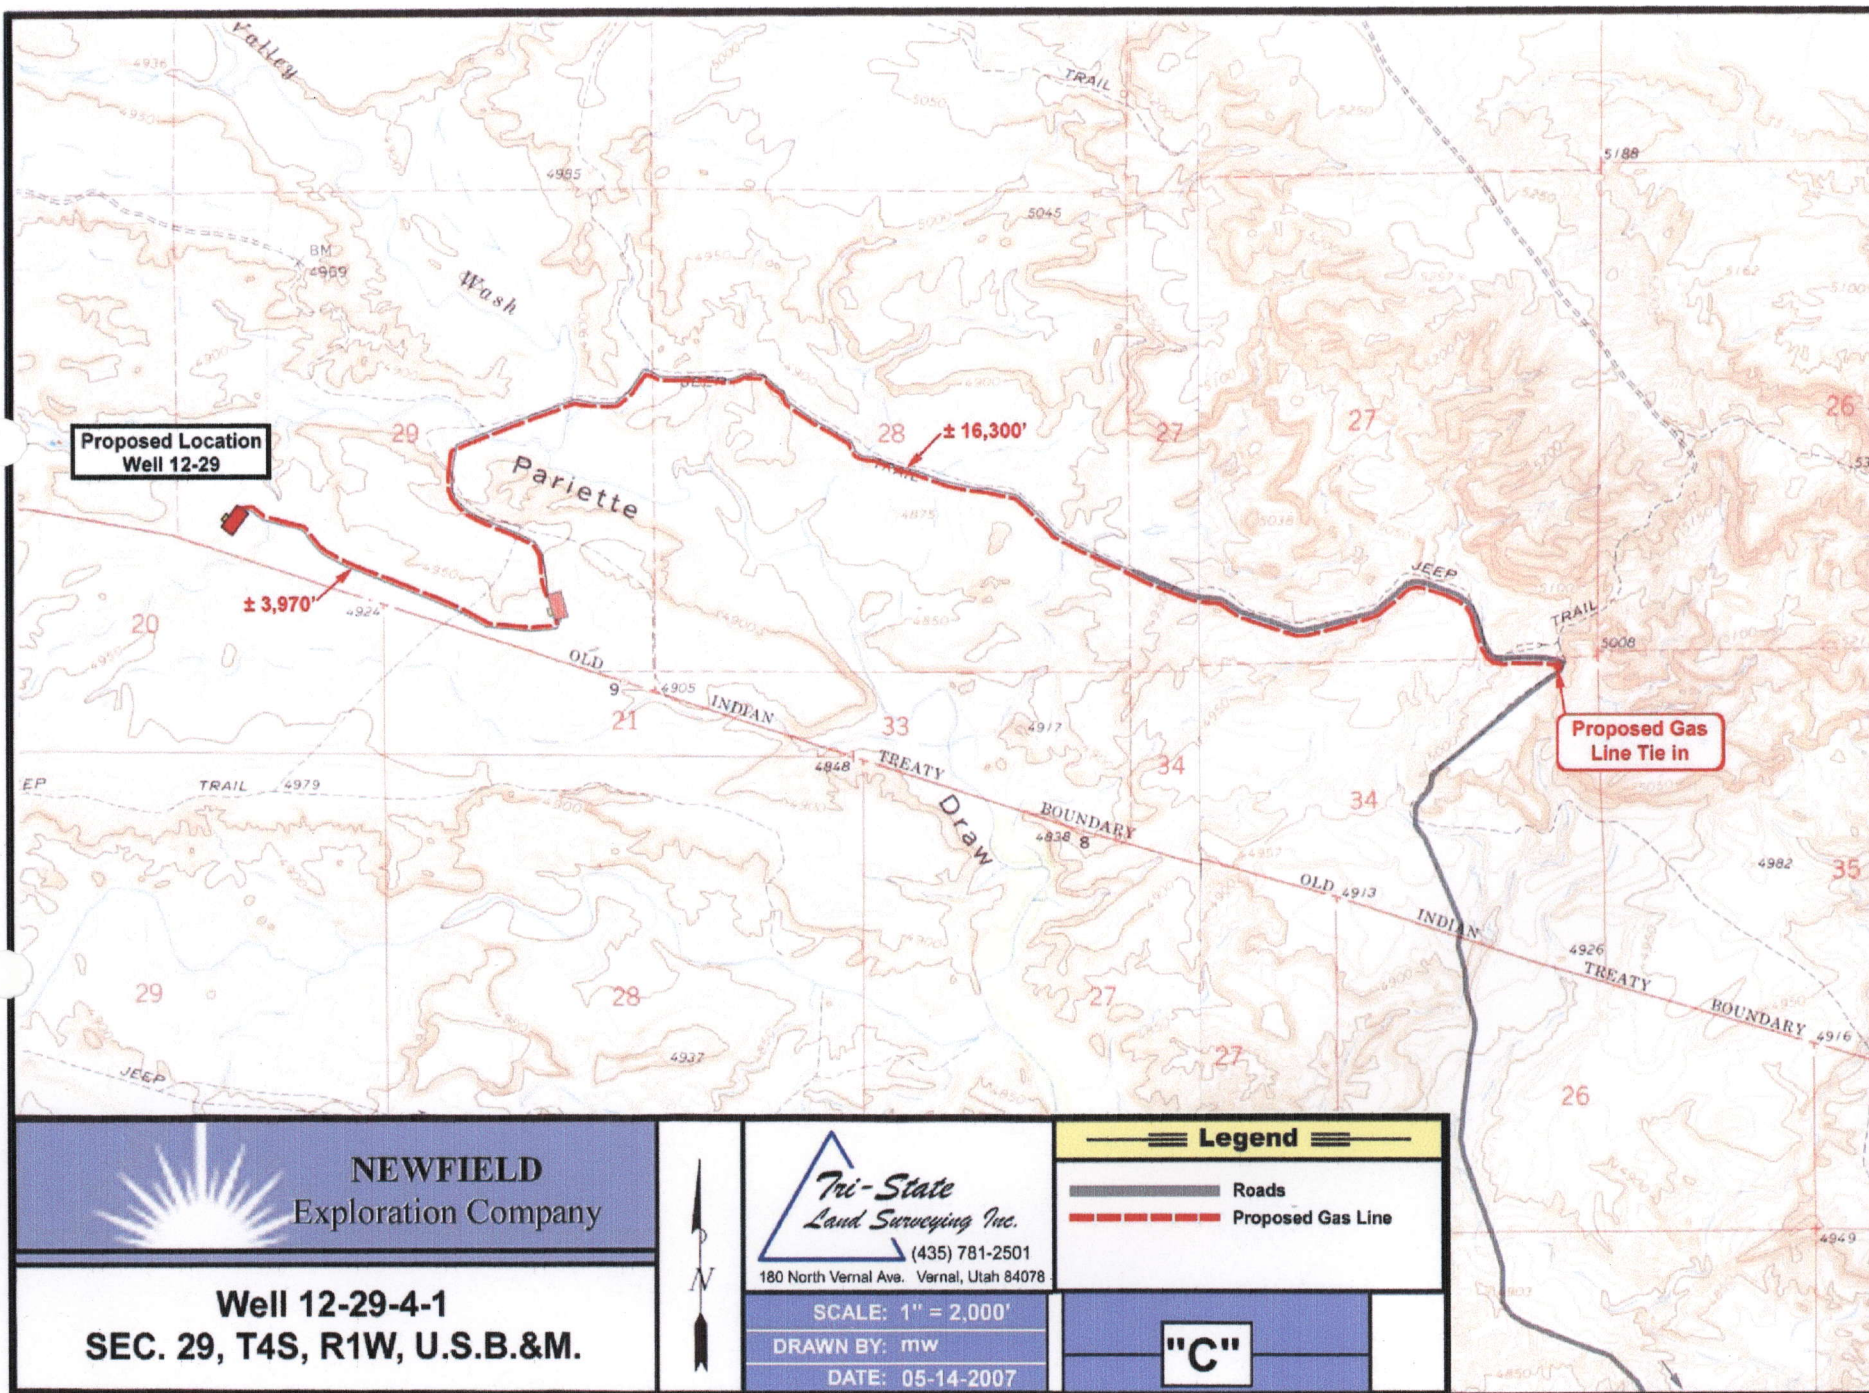



 **NEWFIELD**
Exploration Company


Well 12-29-4-1
SEC. 29, T4S, R1W, U.S.B.&M.





**Tri-State**
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'
DRAWN BY: mw
DATE: 05-14-2007

Legend	
	Roads
	Proposed Gas Line
"C"	

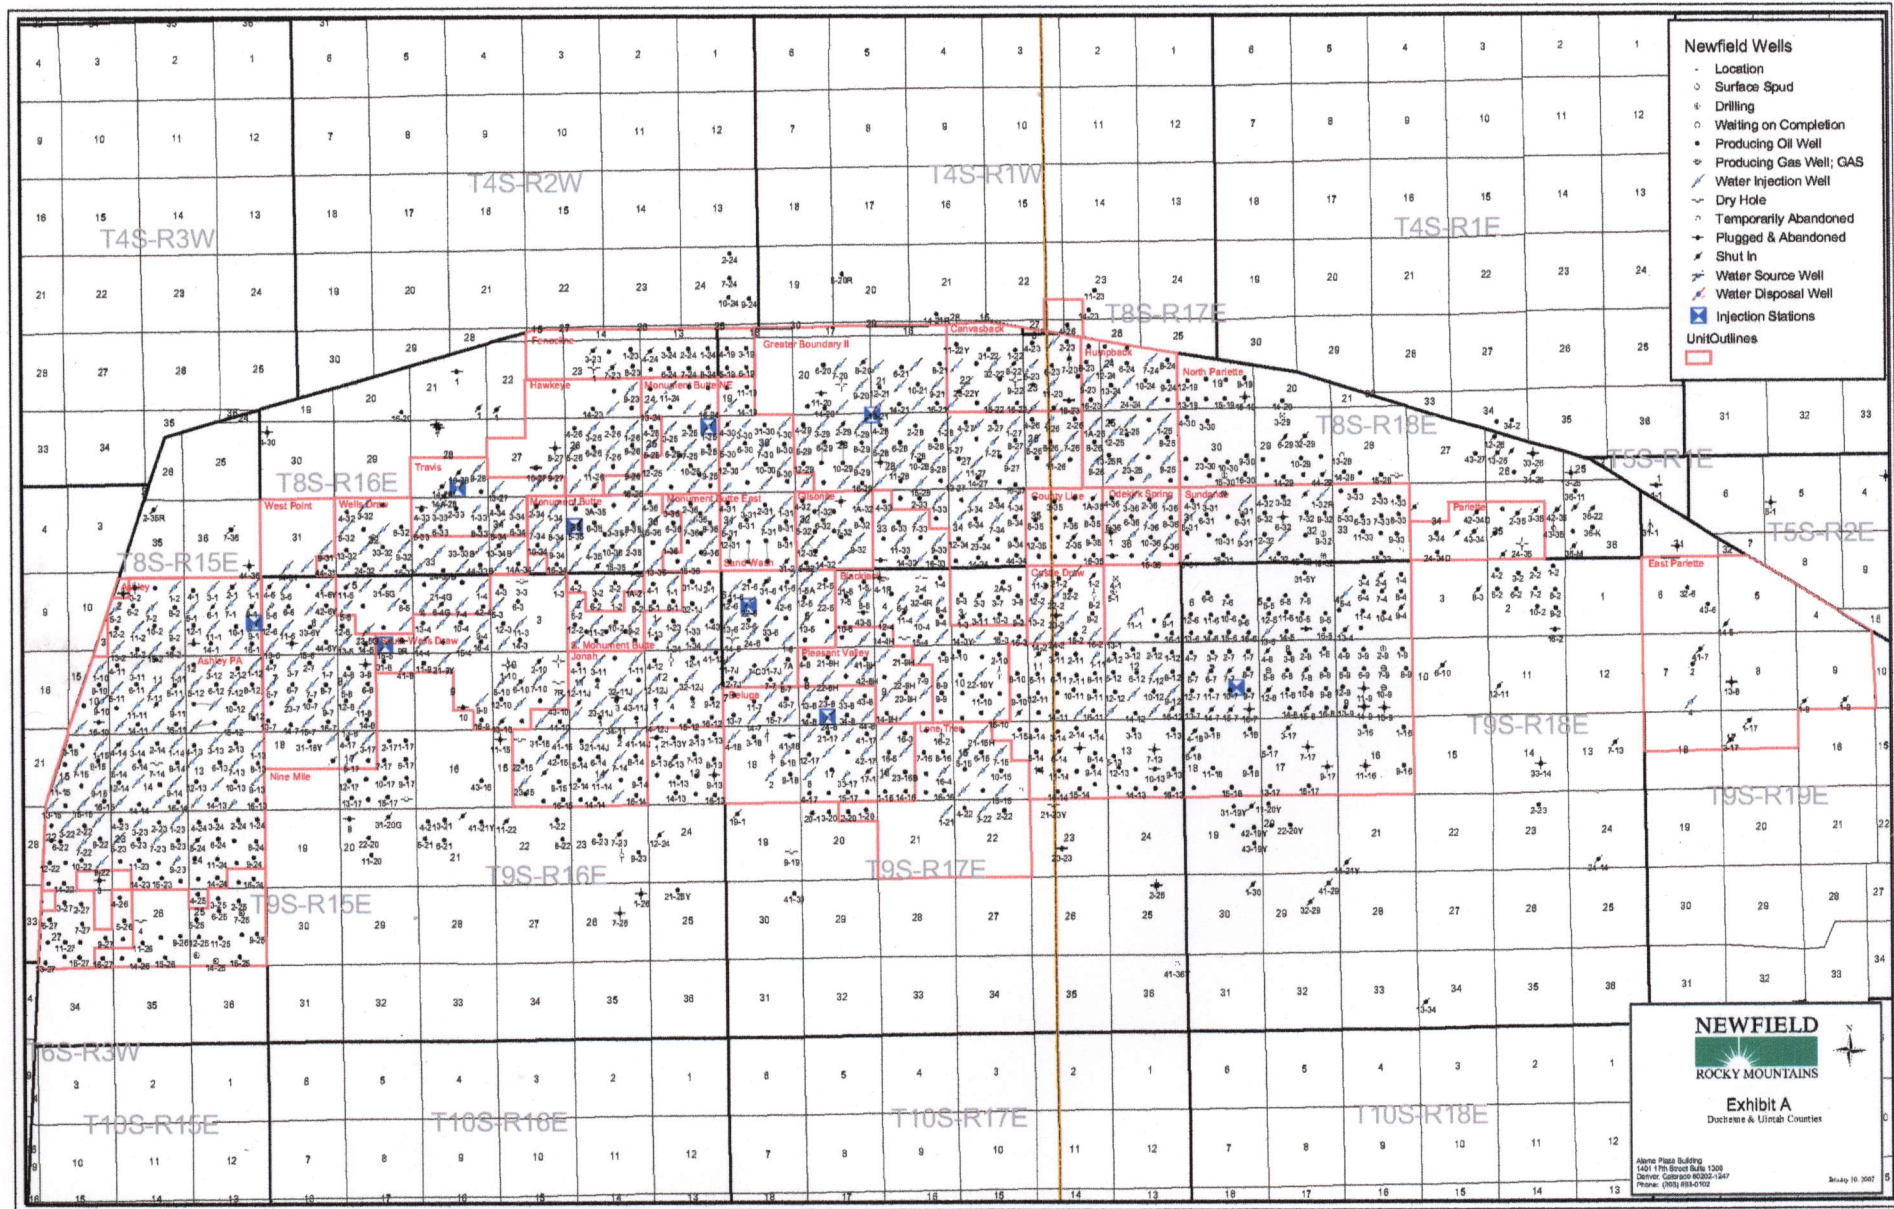

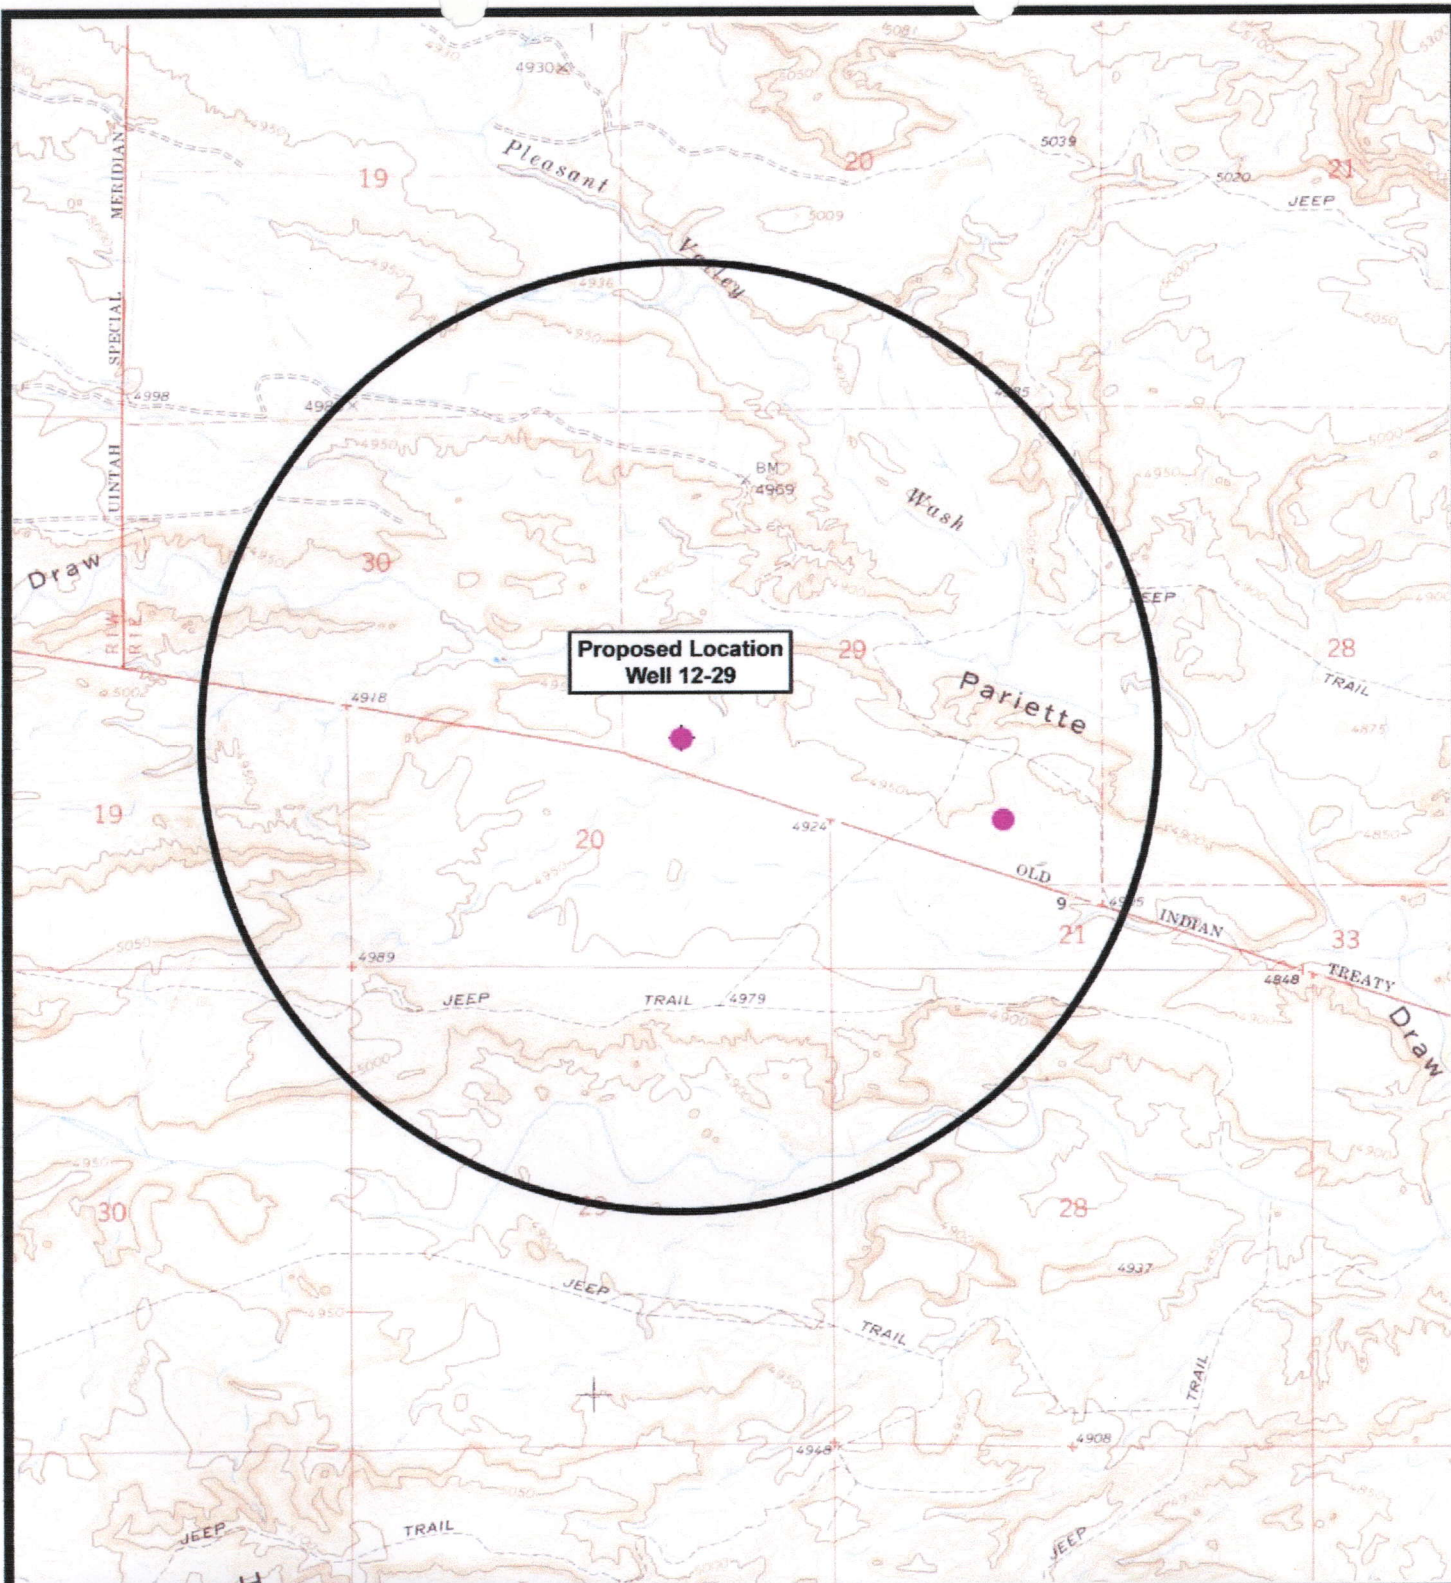



NEWFIELD
Exploration Company

Well 12-29-4-1
SEC. 29, T4S, R1W, U.S.B.&M.





Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'

DRAWN BY: mw

DATE: 05-14-2007

Legend

● Location

○ One-Mile Radius

Exhibit "B"

2-M SYSTEM

Blowout Prevention Equipment Systems

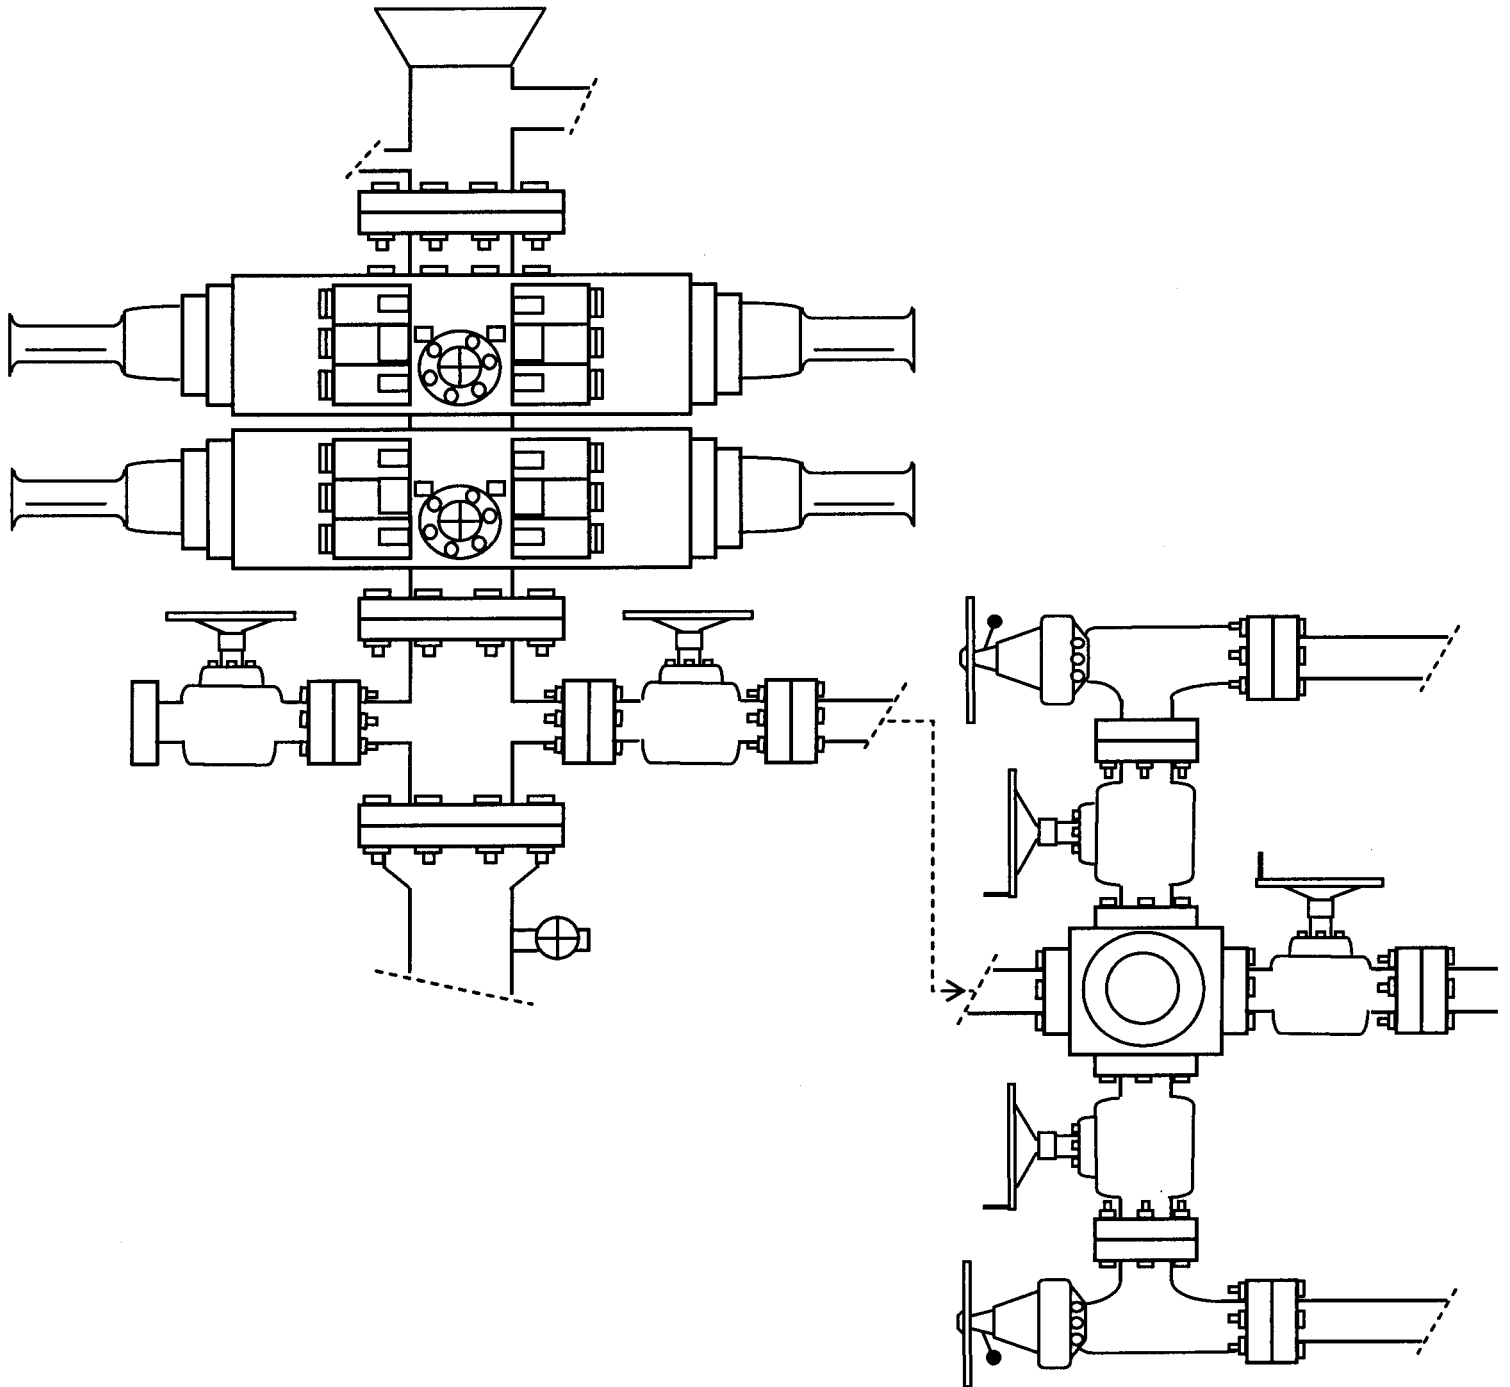


EXHIBIT C

EXHIBIT D

Ute Tribe 12-29-4-1
NWSW Sec 29, T4S, R1E

CULTURAL REPORT WAIVER

For the above referenced location; Rex and LaRue Lamb Trust, Karl Lamb, Trustee.
(Having a Surface Owner Agreement with Newfield Production Company)

Karl Lamb, representing this entity does agree to waive the request from the State of Utah and Bureau of Land Management for an Archaeological/Cultural Survey. This waiver hereby releases Newfield Production Company from this request.

Karl Lamb
Karl Lamb Date
Rex and LaRue Lamb Trust

Brad Mechem 4-13-07
Brad Mechem Date
Newfield Production Company

From: "Mandie Crozier" <mcrozier@newfield.com>
To: "Diana Mason" <dianawhitney@utah.gov>
Date: 6/8/2007 10:14 AM
Subject: RE: Newfield Tribal APD's
Attachments: 8-30-4-2_001.tif; 11-30-4-2_001.tif; 15-19-4-2_001.tif; 3-30-4-2_001.tif; 8-25-4-1_001.tif; 6-25-4-1_001.tif; 6-30-4-1_001.tif; 13-22-4-2_001.tif; 16-22-4-2_001.tif; 12-29-4-1_001.tif; 16-29-4-1_001.tif; 13-19-4-1_001.tif; 6-22-4-1_001.tif; 8-21-4-1_001.tif; 10-21-4-1_001.tif

Here are 15 of the 17 that have previously been submitted. We had to amend the 10 point drilling plan on all of them and then I had to add some narrative in the 13 point surface use plan for the proposed pipelines. Let me know if you have any questions or need anything else.

Mandie Crozier
Newfield Production
(435)646-4825

-----Original Message-----

From: Diana Mason [mailto:dianawhitney@utah.gov]
Sent: Friday, June 08, 2007 8:32 AM
To: Mandie Crozier
Subject: RE: Newfield Tribal APD's

Yes

>>> "Mandie Crozier" <mcrozier@newfield.com> 6/8/2007 8:03 AM >>>
Can I just scan them in and e-mail them to you?

Mandie Crozier
Newfield Production
(435)646-4825

-----Original Message-----

From: Diana Mason [mailto:dianawhitney@utah.gov]
Sent: Friday, June 08, 2007 7:45 AM
To: Mandie Crozier
Subject: Re: Newfield Tribal APD's

Yes, will you send them into us to. Thanks

>>> "Mandie Crozier" <mcrozier@newfield.com> 6/7/2007 1:40 PM >>>
I have had to amend the 10 point plan for all of the Tribal Permits.
The BLM has requested that we have a more detailed casing and cement design. I was not sure if you guys needed a copy of those amendment or not. All of the depths have stayed the same.

Mandie Crozier

Newfield Production

Phone: (435)646-4825

Fax: (435) 646-3031

Form 3160-3
(September 2001)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER



FORM APPROVED
OMB No. 1004-0136
Expires January 31, 2004

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. 20G0005609
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name Ute
2. Name of Operator Newfield Production Company		7. If Unit or CA Agreement, Name and No. N/A
3a. Address Route #3 Box 3630, Myton UT 84052	3b. Phone No. (include area code) (435) 646-3721	8. Lease Name and Well No. Ute Tribal 12-29-4-1
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NW/SW (Lot#1) 390' FSL 642' FWL At proposed prod. zone		9. API Well No. 43-047-39333
14. Distance in miles and direction from nearest town or post office* Approximately 29.1 miles southeast of Myton, Utah		10. Field and Pool, or Exploratory Monument Butte
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) Approx. 290' f/sea, NA' f/unit	16. No. of Acres in lease NA	11. Sec., T., R., M., or Blk. and Survey or Area NW/SW Sec. 29, T4S R1E
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. NA	19. Proposed Depth 8600'	12. County or Parish Duchesne
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 4902' GL	22. Approximate date work will start* 3rd Quarter 2007	13. State UT
17. Spacing Unit dedicated to this well 40 Acres		
20. BLM/BIA Bond No. on file B002792		
23. Estimated duration Approximately seven (7) days from spud to rig release.		

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature 	Name (Printed/Typed) Mandie Crozier	Date 5/15/07
Title Regulatory Specialist		
Approved by Signature 	Name (Printed/Typed) BRADLEY G. HILL	Date 10-01-07
Title ENVIRONMENTAL MANAGER		

Application approval does not warrant or certify the the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

* (Instructions on reverse)

**Federal Approval of this
Action is Necessary**

NEWFIELD PRODUCTION COMPANY
 UTE TRIBAL #12-29-4-1
 NW/SW (LOT #1) SECTION 29, T4S, R1E
 UTAH COUNTY, UTAH

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. GEOLOGIC SURFACE FORMATION:

Uinta formation of Upper Eocene Age

2. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:

Uinta	0' - 1,750'
Green River	1,750'
TD	6,600'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:

Green River Formation (Oil) 1,750' - 6,600'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO ₃) (mg/l)
Dissolved Bicarbonate (NaHCO ₃) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO ₄) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

Ten Point Well Program &
Thirteen Point Well Program
Page 2 of 12

4. **PROPOSED CASING PROGRAM**

a. **Casing Design: Ute Tribal 12-29-4-1**

	Depth	Length	Weight	Grade	Material	Volume	Weight	Cost
Surface casing	0'	300'	24.0	J-55	STC	2,950	1,370	244,000
8-5/8"						17.53	14.35	33.89
Prod casing	0'	6,600'	15.5	J-55	LTC	4,810	4,040	217,000
5-1/2"						2.29	1.92	2.12

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg
 Pore pressure at surface casing shoe = 8.33 ppg
 Pore pressure at prod casing shoe = 8.33 ppg
 Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. **Cementing Design: Ute Tribal 12-29-4-1**

	Depth	Volume	Weight	Strength	Cost	Notes
Surface casing	300'	Class G w/ 2% CaCl	138 161	30%	15.8	1.17
Prod casing	4,600'	Prem Lite II w/ 10% gel + 3% KCl	318 1036	30%	11.0	3.26
Lead						
Prod casing	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363 451	30%	14.3	1.24
Tail						

- *Actual volume pumped will be 15% over the caliper log
 - Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
 - Compressive strength of tail cement: 2500 psi @ 24 hours

Waiting On Cement: A minimum of four (4) hours shall elapse prior to attempting any pressure testing of the BOP equipment which would subject the surface casing cement to pressure, and a minimum of six (6) hours shall elapse before drilling out of the wiper plug, cement, or shoe is begun. WOC time shall be recorded in the Driller's Log. Compressive Strength shall be a minimum of 500 psi prior to drilling out.

The Vernal BLM Office shall be notified, with sufficient lead time, in order to have a BLM representative on location while running all casing strings and cementing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if

Ten Point Well Program &
Thirteen Point Well Program
Page 3 of 12

the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

The production casing cementing program shall be conducted as approved to protect and/or isolate all usable water zones, potentially productive zones, lost circulation zones, abnormally pressured zones, and any prospectively valuable deposits of minerals.

As a minimum, usable water zones shall be isolated and/or protected by having a cement top for the production casing at least 200 feet above the base of the usable water. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

Top plugs shall be used to reduce contamination of cement by displacement fluid. A bottom plug or other acceptable technique, such as a suitable preflush fluid, inner string cement method, etc., shall be utilized to help isolate the cement from contamination by the mud being displaced ahead of the cement slurry.

All casing strings below the conductor shall be pressure tested to 0.22 psi per foot of casing string length or to 1500 psi, whichever is greater, but not to exceed 70% of the minimum internal yield. If pressure declines more than 10% in 30 minutes, corrective action shall be taken.

A Form 3160-5, "Sundry Notices and Reports on Wells" shall be filed with the Vernal Office Manager within 30 days after the work is completed. This report must include the following information:

Setting of each string of casing showing the size, grade, weight of casing set, depth, amounts and type of cement used, whether cement circulated or the top of the cement behind the casing, depth of the cementing tools used, casing test method and results, and the date of the work done. Spud date will be shown on the first reports submitted.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The Company's Class 2M minimum specifications for pressure control equipment for a standard Monument Butte development well are as follows:

A 2000 psi WP hydraulic BOP stack consisting of two ram preventers (double or two singles) and either an annular preventer or a rotating head. If no annular preventer is used, ram blocks will be changed to match the outside diameter of casing and the stack will be retested prior to running any casing string.

Connections - All components on the stack and choke and kill lines shall have either flanged, studded, clamp hub or equivalent proprietary connections except control line outlets and pressure gauges.

Choke Manifold - The minimum equipment requirements are shown in Exhibit C. The choke manifold shall be located at least 5 feet from the BOP stack, outside the substructure.

Pressure Monitoring - A means of monitoring the inlet pressure of the choke manifold shall be provided. The capability to isolate this outlet shall be provided.

Drillstring Control Devices - An upper and lower kelly valve, drillstring safety valve including correct closing handle, and an inside BOP shall be provided. The safety valve and inside BOP shall have connections or crossovers to fit all tubulars with OD to allow adequate clearance for running in the hole. All drillstring valves shall be rated to the required BOP WP.

Ten Point Well Program &
Thirteen Point Well Program
Page 4 of 12

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a 2M system, and individual components shall be operable as designed.

Function test of the BOP equipment shall be made daily. All required BOP tests and/or drills shall be recorded in the Driller's report.

Chart recorders will be used for all pressure tests. Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to BLM representatives upon request.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ± 3200 feet will be drilled with either fresh water or an air/mist system, depending on the drilling contractor's preference. From about 3200 feet, or in the case of the air/mist system when hole conditions dictate, to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite.

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

a. **Logging Program:**

(the log types run may change at the discretion of the geologist)

FDC/CNL/GR/DLL: TD - 3,200'

CBL: A cement bond log will be run from TD to the cement top of the production casing.
A field copy will be submitted to the Vernal BLM Office.

b. **Cores:** As deemed necessary.

c. **Drill Stem Tests:** No DSTs are planned in the Green River.

Drill stem tests, if they are run, will adhere to the following requirements: Initial opening of the drill stem test tools shall be restricted to daylight hours unless specific approval to start

Ten Point Well Program &
Thirteen Point Well Program
Page 5 of 12

during other hours is obtained from the Authorized Officer (AO). However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vapor-proof for safe operations). Packers can be released but tripping shall not begin before daylight, unless prior approval is obtained from the AO. Closed chamber DSTs may be performed day or night.

Some means of reverse circulation shall be provided in case of flow to the surface showing evidence of hydrocarbons.

Separation equipment required for the anticipated recovery shall be properly installed before a test starts.

If a DST is performed, all engines within 100 feet of the wellbore that are required to be operational during the test shall have spark arresters or water-cooled exhausts.

Please refer to the Monument Butte Field Standard Operation Procedure (SOP).

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

a. **Drilling Activity**

Anticipated Commencement Date:	Upon approval of the site specific APD.
Drilling Days:	Approximately 7 days.
Completion Days:	Approximately 10 - 14 days.

b. **Notification of Operations**

The Vernal BLM office will be notified at least 24 hours prior to the commencement of spudding the well (to be followed with a Sundry Notice, Form 3160-5), of initiating pressure tests of the blowout preventer and related equipment, and running casing and cementing of all casing strings. Notification will be made during regular work hours (7:45 a.m.-4:30 p.m., Monday - Friday except holidays).

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the appropriate regulations, Onshore Orders, or BLM policy.

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in suspended status without prior approval from the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given to the BLM before resumption of operations.

Daily drilling and completion reports shall be submitted to the Vernal BLM Office on a weekly basis.

Ten Point Well Program &
Thirteen Point Well Program
Page 6 of 12

Whether the well is completed as a dry hole or a producer, the "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. One copy of all logs, core descriptions, core analyses, well test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the Authorized Officer (AO).

A completion rig will be used for completion operations after the wells are stimulated to run the production tubing. All conditions of this approved plan will be applicable during all operations conducted with the completion rig.

Operator shall report production data to the MMS pursuant to 30 CFR 216.5 using form MMS/3160. In accordance with Onshore Oil and Gas Order No. 1, a well will be reported on form 3160-6, "Monthly Report of Operations," starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report will be filed with the Vernal BLM Office.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated, or the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever occurs first; and for gas wells, as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated, or the date on which gas is measured through permanent metering facilities, whichever occurs first.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by written communication not later than 5 days following the date when the well is placed on production.

Pursuant to Onshore Order No. 7, with the approval of the AO, produced water may be temporarily disposed of into unlined pits for a period of up to 90 days. During this period, an application for approval of the permanent disposal method must be submitted to the AO.

Pursuant to NTL-4A, lessees or operators are authorized to vent/flare gas during the initial well evaluation tests, not to exceed 30 days or the production of 50 MMCF of gas, whichever occurs first. An application must be filed with the AO and approval received for any venting/flaring of gas beyond the initial 30 days or authorized test period.

A schematic facilities diagram, as required by 43 CFR 3162.7-5(b.9.d), shall be submitted to the Vernal BLM Office within 60 days of installation or first production, whichever occurs first. All site security regulations, as specified in Onshore Oil & Gas Order No. 3, shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5(b.4).

Well abandonment operations shall not be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment", Form 3160-5, will be filed with the Authorized Officer within 30 days following completion of the well for abandonment. This report will indicate placement of the plugs and current status of the surface restoration. Final Abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO, or the appropriate surface managing agency.

Ten Point Well Program &
Thirteen Point Well Program
Page 7 of 12

Pursuant to Onshore Oil and Gas Order No. 1, lessees and operators have the responsibility to see that their exploration, development, production, and construction operations are conducted in a manner which conforms with applicable Federal laws and regulations and with the State and local laws, to the extent to which they are applicable, to operations on Federal or Indian lands.

Ten Point Well Program &
Thirteen Point Well Program
Page 8 of 12

NEWFIELD PRODUCTION COMPANY
UTE TRIBAL #12-29-4-1
NW/SW (LOT #1) SECTION 29, T4S, R1E
UINTAH COUNTY, UTAH

THIRTEEN POINT SURFACE PROGRAM

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site Ute Tribal 12-29-4-1 located in the NW¼ SW¼ Section 29, T4S, R1E, S.L.B. & M., Uintah County, Utah:

Proceed in a southeasterly direction out of Myton, approximately 16.9 miles to the junction of this road and an existing road to the northeast; proceed northeasterly approximately 1.8 miles to it's junction with an existing road to the north; proceed northeasterly and then northwesterly approximately 6.6 miles to its junction with an existing road to the west; proceed westerly approximately 1.0 miles to it's junction with the beginning of an existing two track road to be upgraded; proceed westerly approximately 7,030' to the junction of the two track road with the beginning of the proposed access road to the southwest; proceed in a southwesterly direction approximately 7,670' to the propose well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

2. PLANNED ACCESS ROAD

Approximately 7,670' of access road is proposed. See attached Topographic Map "B".

The proposed access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is deemed necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%.

There will be no culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

Refer to EXHIBIT B.

Ten Point Well Program &
Thirteen Point Well Program
Page 9 of 12

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck for drilling purposes from the following water sources:

Johnson Water District
Water Right: 43-10136

Neil Moon Pond
Water Right: 43-11787

Maurice Harvey Pond
Water Right: 47-1358

Newfield Collector Well
Water Right: 41-3530 (A30414DV, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Ten Point Well Program &
Thirteen Point Well Program
Page 10 of 12

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E) or at State of Utah approved surface disposal facilities.

8. **ANCILLARY FACILITIES:**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT:**

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

- a) **Producing Location**

Ten Point Well Program &
Thirteen Point Well Program
Page 11 of 12

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

b) **Dry Hole Abandoned Location**

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP:** Rex and LaRue Lamb Trust, Duchesne County, Utah. See attached Surface Use Agreement.

12. **OTHER ADDITIONAL INFORMATION:**

Newfield Production Company requests 14,700' of disturbed area be granted for construction of the proposed gas lines. It is proposed that the disturbed area will temporarily be 50' wide to allow for construction of a 6" gas gathering line, and a 3" poly fuel gas line, with a permanent width of 30' upon completion of the proposed gas lines. The construction phase of the proposed gas lines will last approximately (5) days. Both lines will tie in to the existing pipeline infrastructure. Refer to Topographic Map "C."

The Easement ROW for construction of the proposed gas pipeline in Sec. 27, T4S R1E and Sec. 28, T4S R1E will be forthcoming.

- a) Newfield Production Company is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, Newfield is to immediately stop work that might further disturb such materials and contact the Authorized Officer.
- b) Newfield Production will control noxious weeds along rights-of-way for roads, pipelines, well sites or other applicable facilities. On State administered land it is required that a Pesticide Use Proposal shall be submitted and given approval prior to the application of herbicides or other possible hazardous chemicals.
- c) Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on State Lands after the conclusion of drilling operations or at any other time without State authorization. However, if State authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

The Archaeological Report Waiver for this location is attached.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made

Ten Point Well Program &
Thirteen Point Well Program
Page 12 of 12

with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the Ute Tribal 12-29-4-1, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the Ute Tribal 12-29-4-1 Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

The State office as well as the Ute Tribe Energy and Mineral Department shall be notified upon site completion prior to moving on the drilling rig.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative


Name: Kim Kettle
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification

Please be advised that Newfield Production Company is considered to be the operator of well #12-29-4-1, NW/SW Section 29, T4S, R1E, Uintah County, Utah and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by US Specialty Insurance #B002792.


I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

Date 5/15/07


Mandie Crozier
Regulatory Specialist
Newfield Production Company

NEWFIELD PRODUCTION COMPANY

WELL LOCATION, WELL 12-29-4-1,
LOCATED AS SHOWN IN THE NW 1/4 SW
1/4 (LOT 1) OF SECTION 29, T4S, R1E,
U.S.B.&M. UINTAH COUNTY, UTAH.



1. The Proposed Well head bears N75°20'40"E 726.04' from the Mile Marker 10.


2. Footages are at right angles from the section lines.

THIS IS TO CERTIFY THAT THE ABOVE PLAN WAS
PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS
MADE BY ME OR UNDER MY SUPERVISION AND THAT
THE SAME ARE TRUE AND CORRECT TO THE BEST OF
MY KNOWLEDGE AND BELIEF. No. 189377


STACY W.
REGISTERED LAND SURVEYOR
REGISTRATION NO. 10033
STATE OF OREGON

TRI STATE LAND SURVEYING & CONSULTING
180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501





DATE SURVEYED: 05-09-07	SURVEYED BY: D.S.
DATE DRAWN: 05-10-07	DRAWN BY: T.C.J
REVISED:	SCALE: 1" = 1000'

 = SECTION CORNERS LOCATED

BASIS OF ELEV;
U.S.G.S. 7-1/2 min QUAD (PARIETTE DRAW SW)

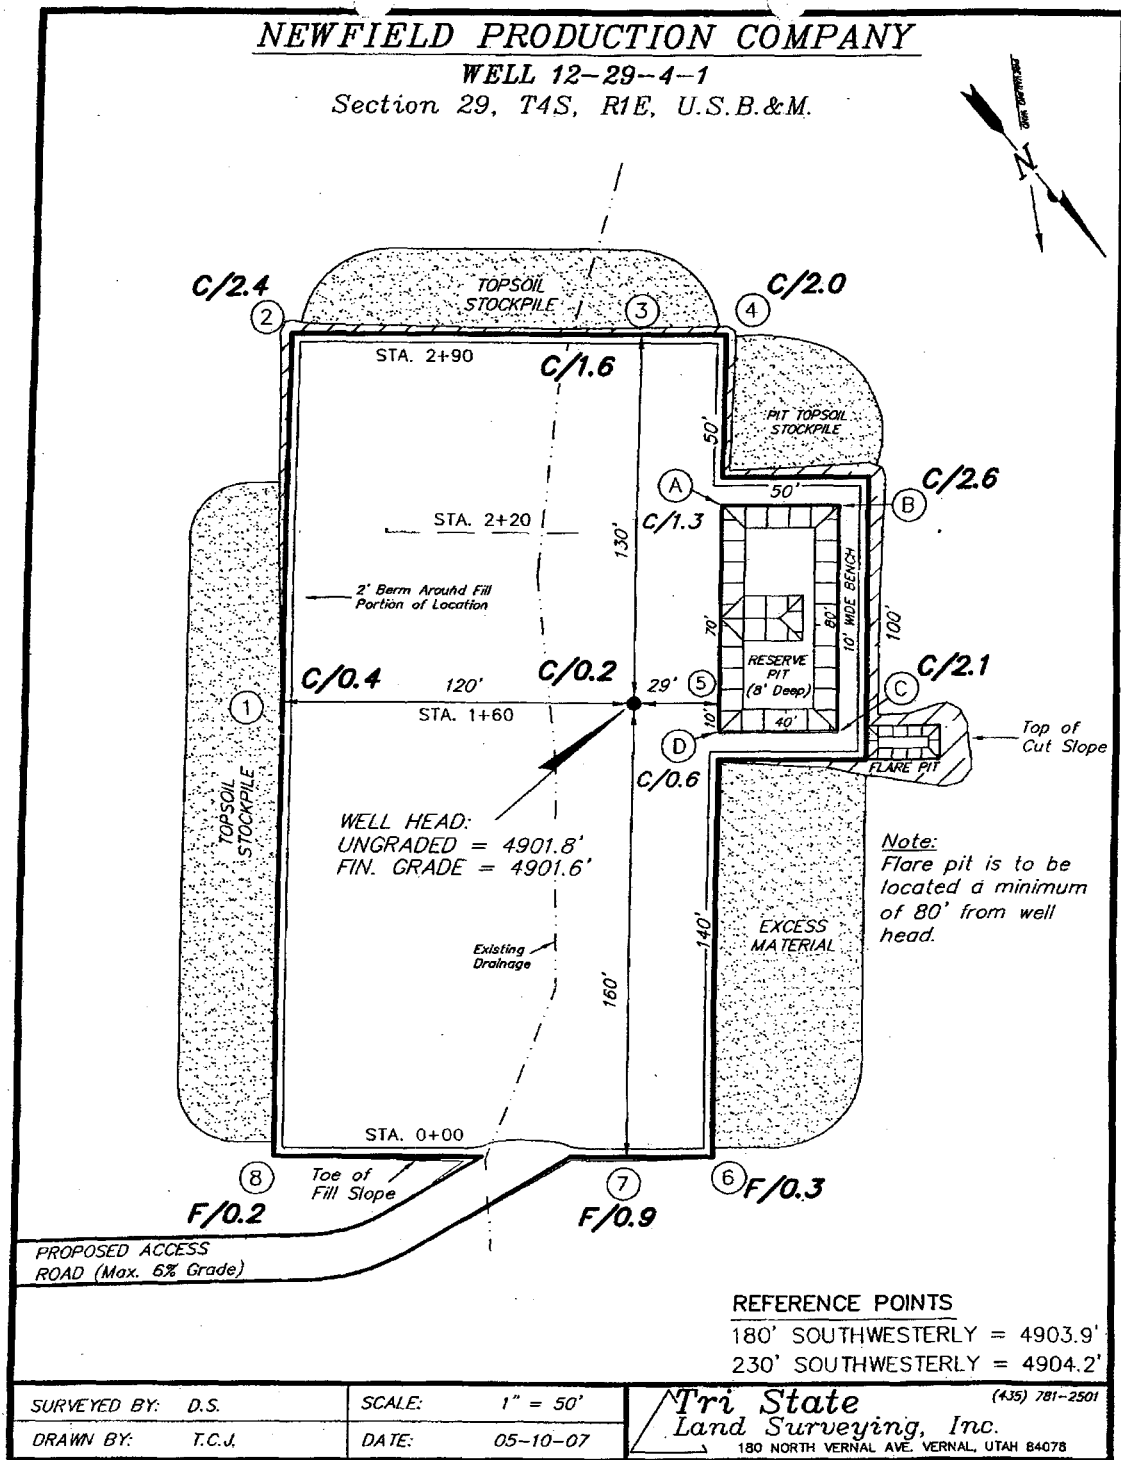

NEWFIELD PRODUCTION COMPANY
CROSS SECTIONS
WELL 12-29-4-1

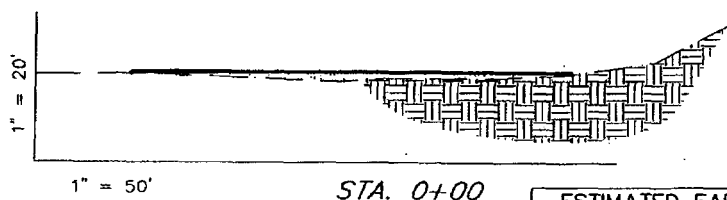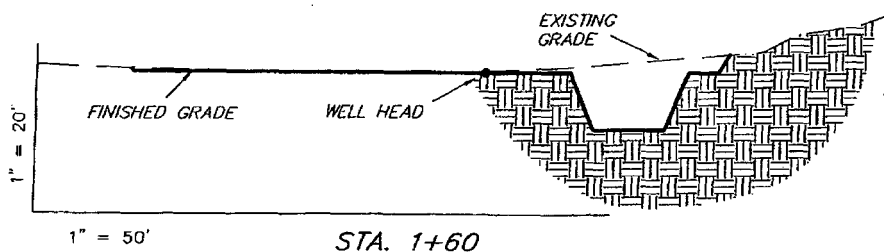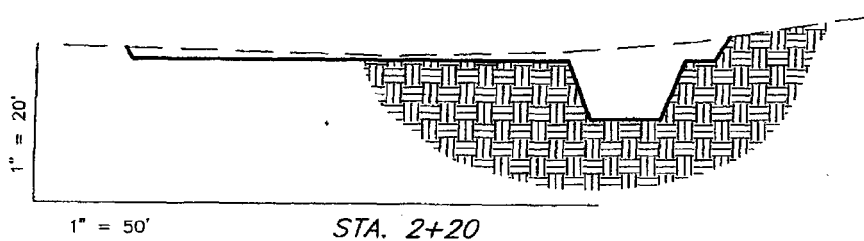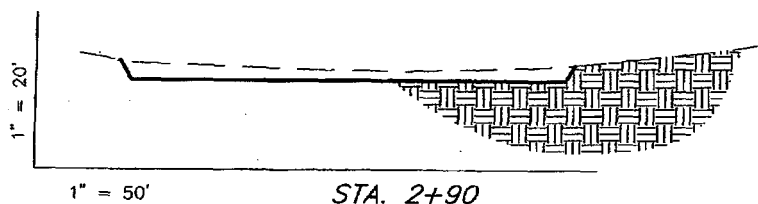

NOTE:
 UNLESS OTHERWISE NOTED
 ALL CUT/FILL SLOPES ARE
 AT 1.5:1

ESTIMATED EARTHWORK QUANTITIES
 (No Shrink or swell adjustments have been used)
 (Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	740	740	Topsoil is not included in Pad Cut	0
PIT	640	0		640
TOTALS	1,380	740	940	640


SURVEYED BY: D.S.


SCALE: 1" = 50'


DRAWN BY: T.C.J.


DATE: 05-10-07

Tri State (435) 781-2501
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

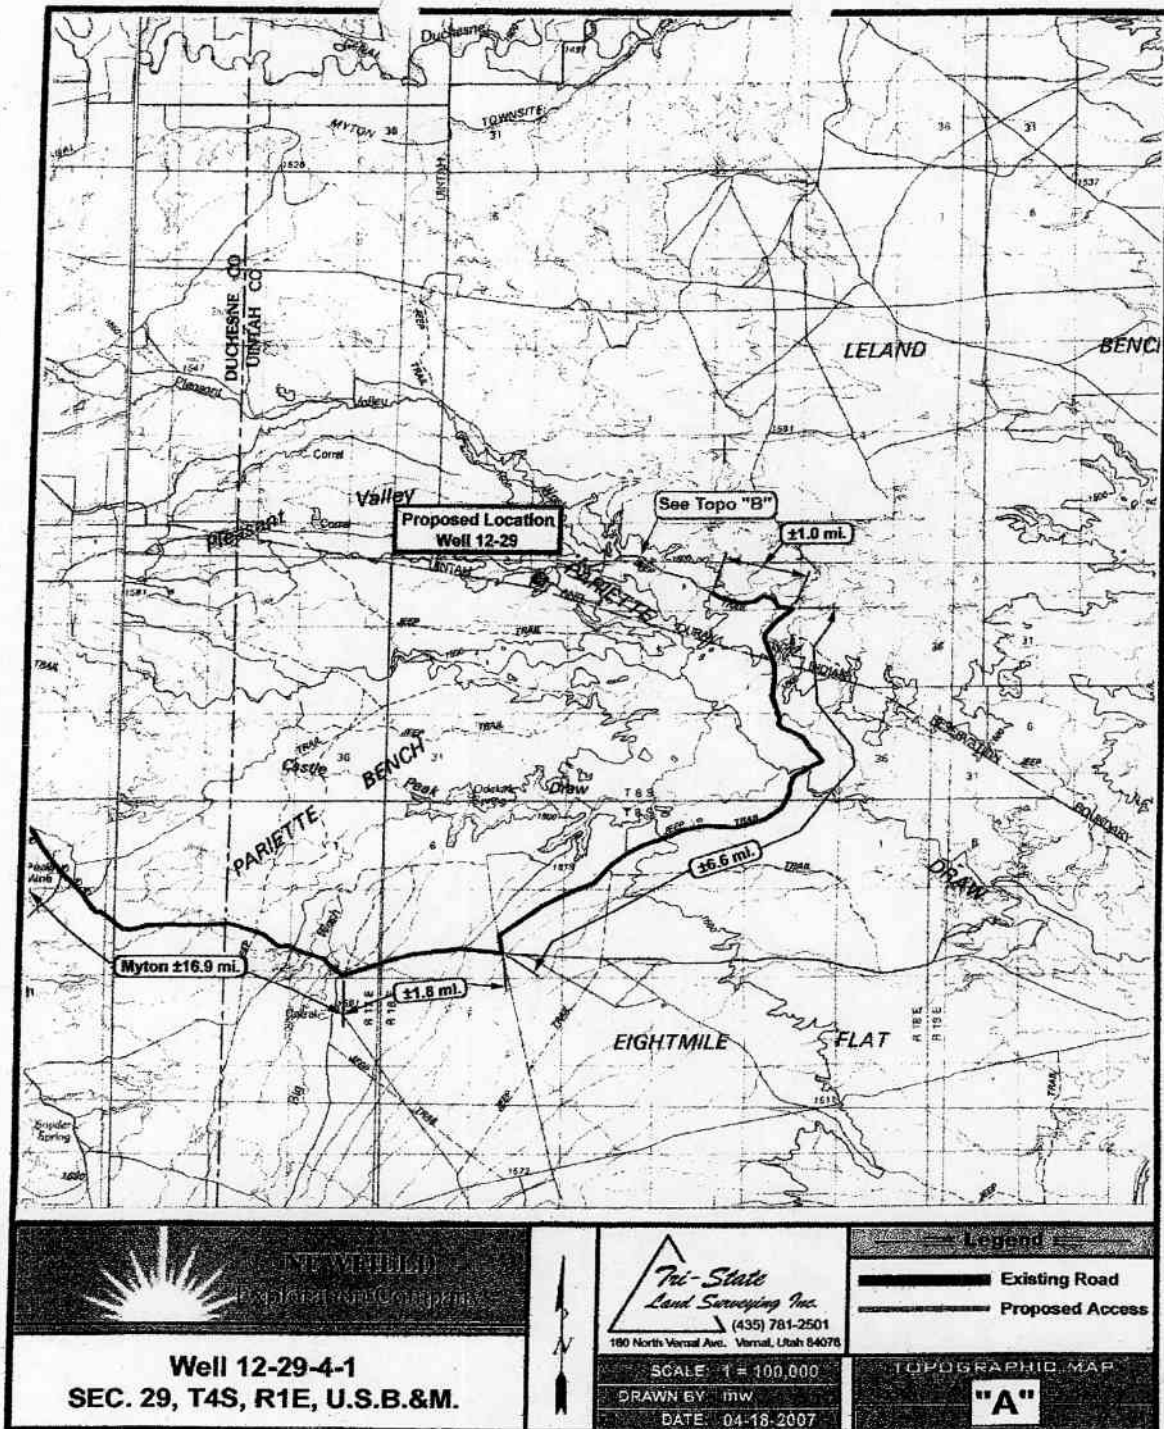

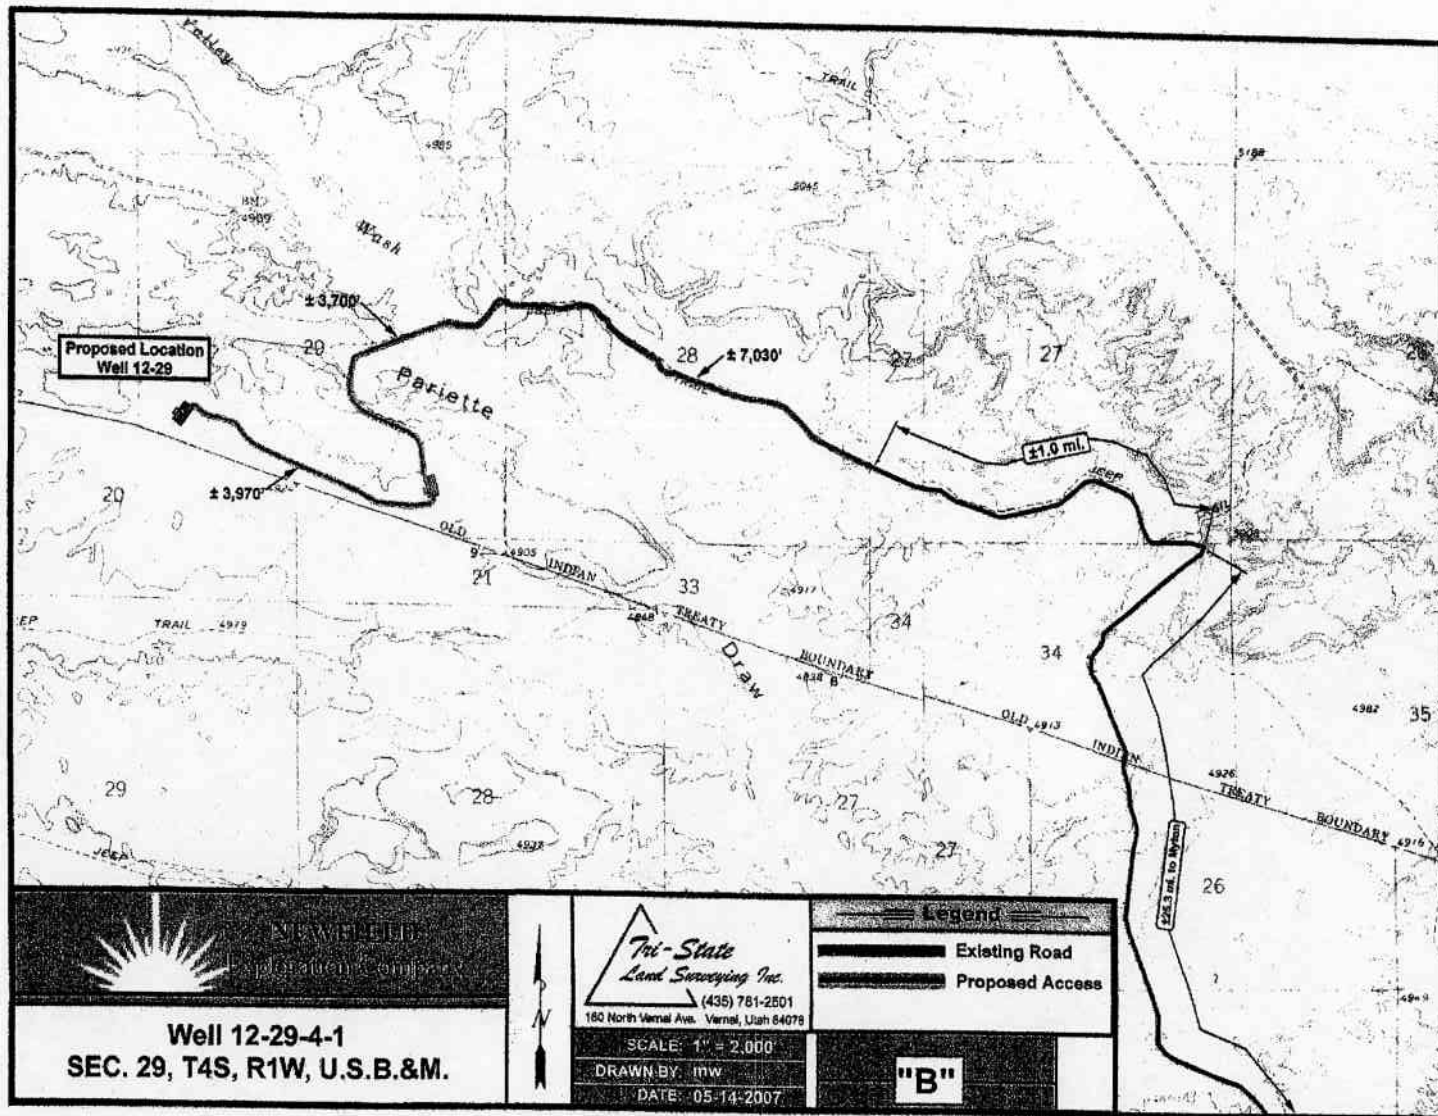

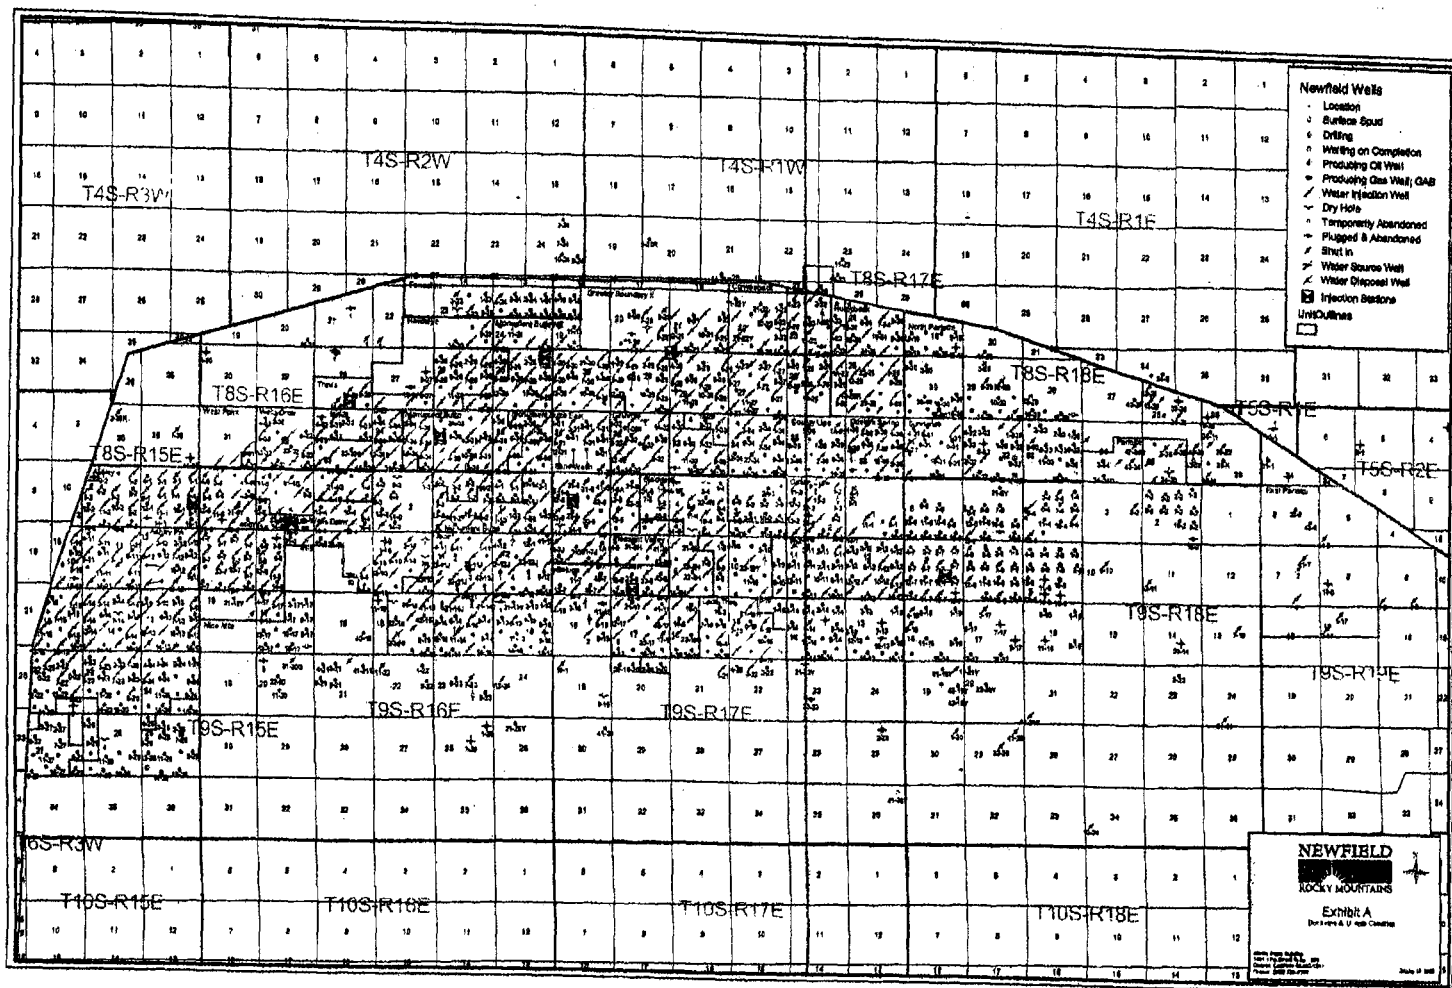

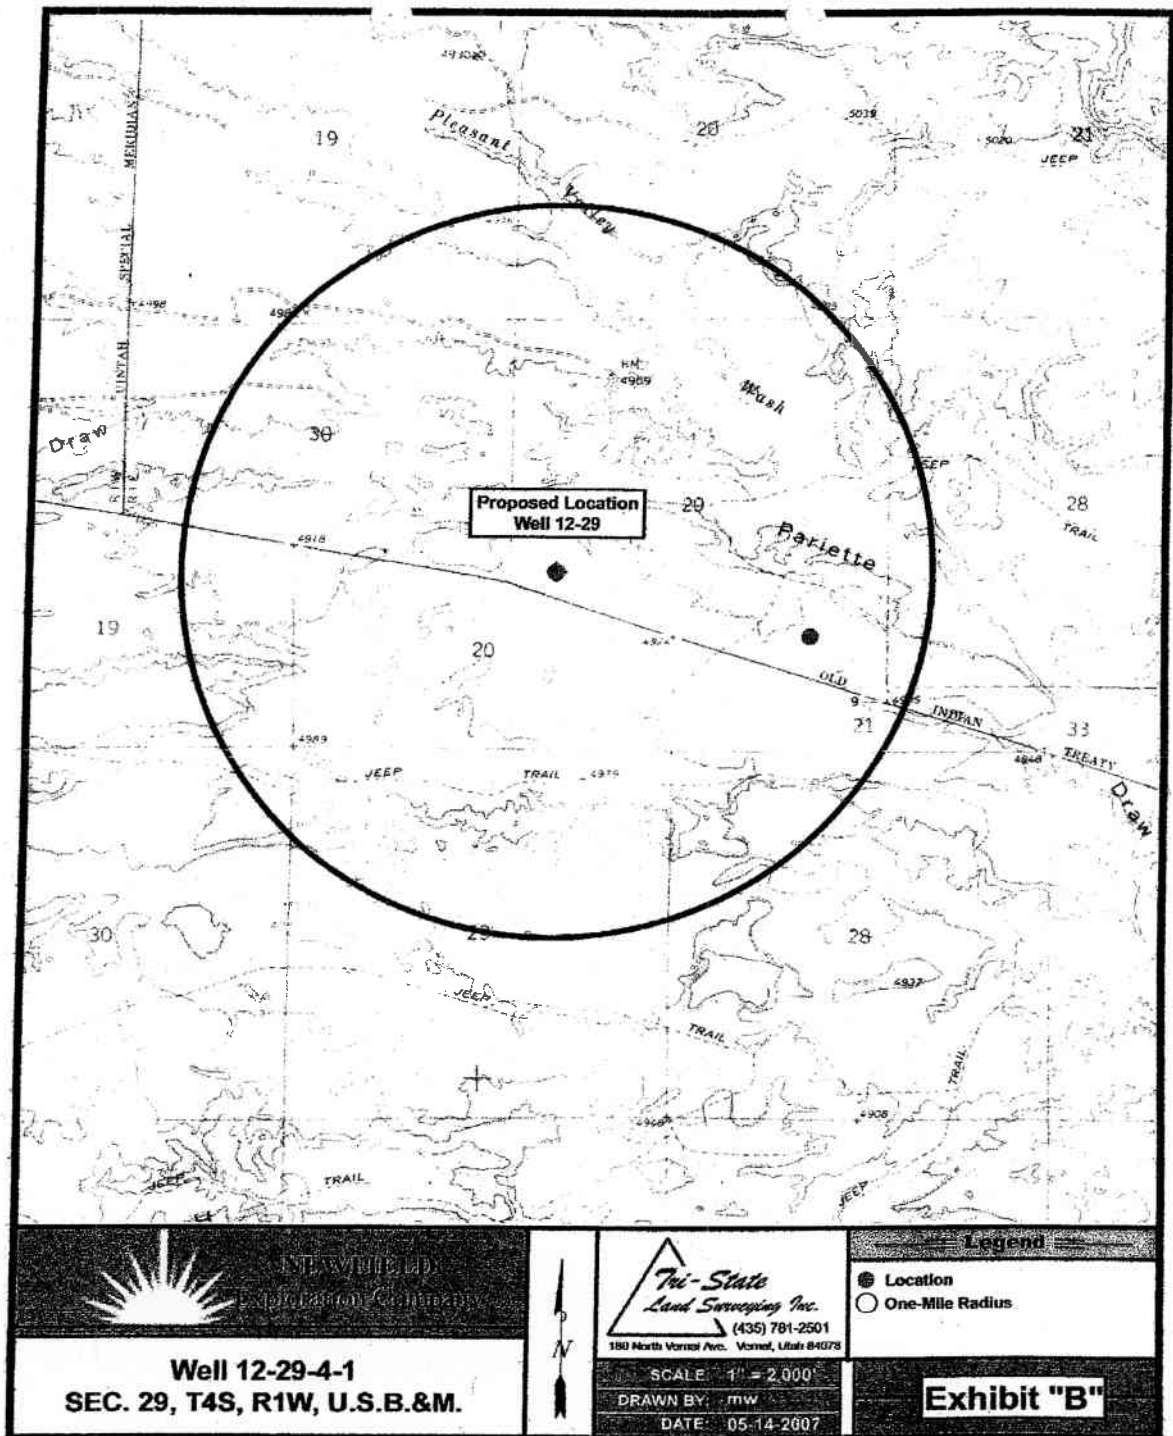

2-M SYSTEM
Blowout Prevention Equipment Systems

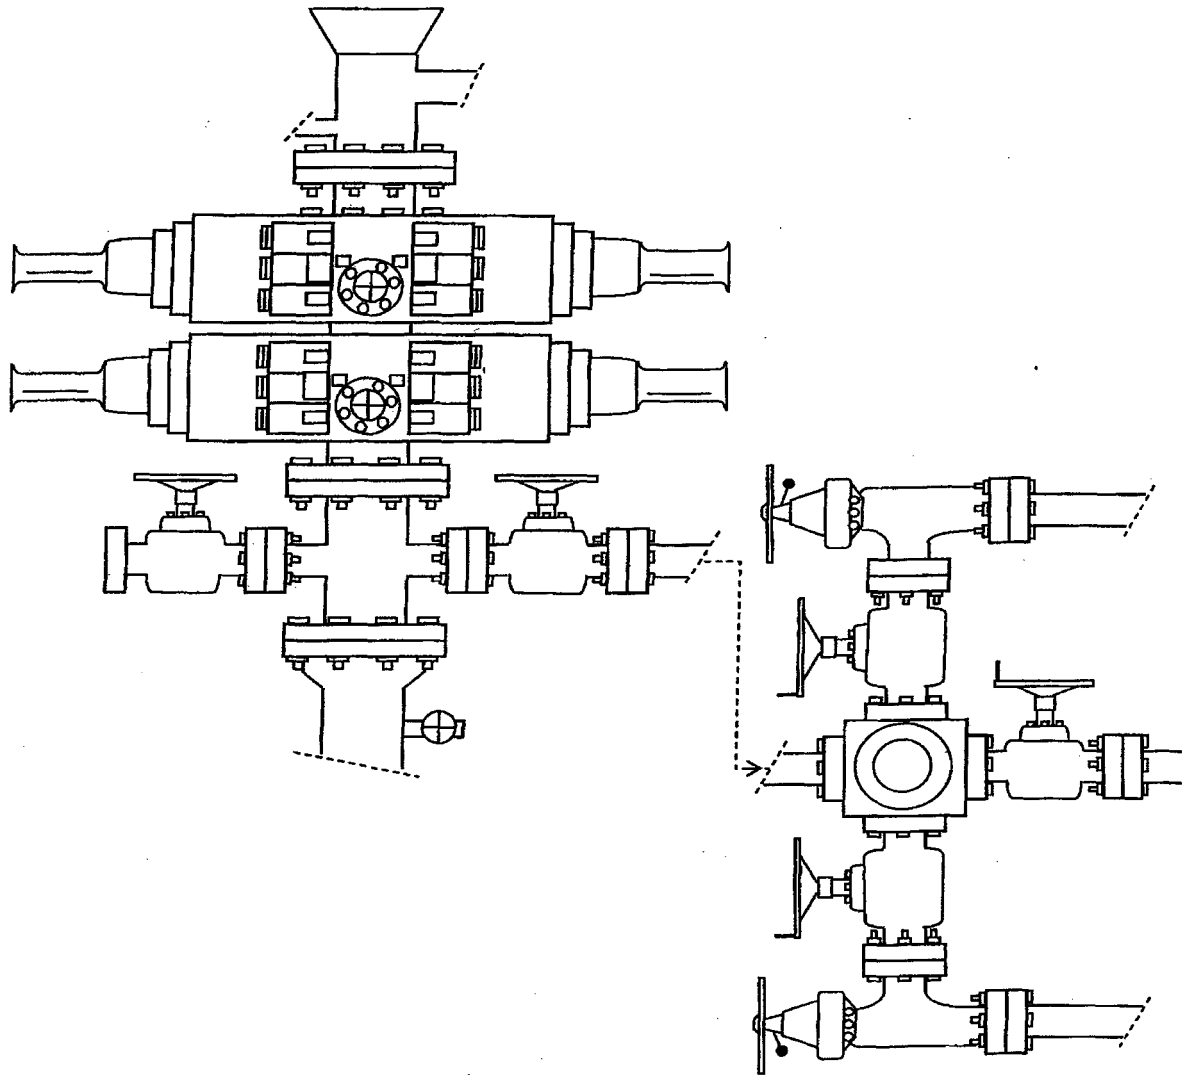


EXHIBIT C

EXHIBIT D

Ute Tribe 12-29-4-1
NWSW Sec 29, T4S, R1E

CULTURAL REPORT WAIVER

For the above referenced location; Rex and LaRue Lamb Trust, Karl Lamb, Trustee.
(Having a Surface Owner Agreement with Newfield Production Company)

Karl Lamb, representing this entity does agree to waive the request from the State of Utah and Bureau of Land Management for an Archaeological/Cultural Survey. This waiver hereby releases Newfield Production Company from this request.

Karl Lamb
Karl Lamb Date
Rex and LaRue Lamb Trust

Brad Mechem 4-13-07
Brad Mechem Date
Newfield Production Company

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 05/17/2007

API NO. ASSIGNED: 43-047-39333

WELL NAME: UTE TRIBAL 12-29-4-1

OPERATOR: NEWFIELD PRODUCTION (N2695)

PHONE NUMBER: 435-646-3721

CONTACT: MANDIE CROZIER

PROPOSED LOCATION:

NWSW 29 040S 010E

SURFACE: 0390 FSL 0642 FWL

BOTTOM: 0390 FSL 0642 FWL

COUNTY: UINTAH

LATITUDE: 40.10396 LONGITUDE: -109.9132

UTM SURF EASTINGS: 592628 NORTHINGS: 4439651

FIELD NAME: UNDESIGNATED (2)

INSPECT LOCATN BY: / /

Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 2 - Indian

LEASE NUMBER: 20G0005609

SURFACE OWNER: 4 - Fee

PROPOSED FORMATION: GRRV

COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

☒ Plat
☒ Bond: Fed[] Ind[2] Sta[] Fee[]
(No. B002792)
☒ Potash (Y/N)
☒ Oil Shale 190-5 (B) or 190-3 or 190-13
☒ Water Permit
(No. 43-10136)
☒ RDCC Review (Y/N)
(Date:)
☒ Fee Surf Agreement (Y/N)
☒ Intent to Commingle (Y/N)

LOCATION AND SITING:

___ R649-2-3.
Unit: ___
___ R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
☒ R649-3-3. Exception
Drilling Unit
Board Cause No: ___
Eff Date: ___
Siting: ___
___ R649-3-11. Directional Drill

COMMENTS:

Needs Permit (09-14-07)

STIPULATIONS:

1- Federal Approval
2- Spacing Slip
3- STATEMENT OF BASIS

T4S R1E

29

UTE TRIBAL
12-29-4-1

FEDERAL 1

FEDERAL
11-20-8-18

FEDERAL
10-20-8-18

20

UTE TRIBAL
16-29-4-1

FEDERAL
14-20-8-18

FEDERAL
15-20-8-18

FEDERAL
16-20-8-18

2032

FEDERAL
2-29-8-18

EIGHT MILE FLAT NORTH FIELD

T8S R18E

OPERATOR: NEWFIELD PROD CO (N2695)

SEC: 29 T.4S R.1E

FIELD: UNDESIGNATED (002)

COUNTY: *Uintah*

SPACING: R649-3-3 / EXCEPTION LOCATION

Wells Status


- GAS INJECTION
- GAS STORAGE
- LOCATION ABANDONED
- NEW LOCATION
- PLUGGED & ABANDONED
- PRODUCING GAS
- PRODUCING OIL
- SHUT-IN GAS
- SHUT-IN OIL
- TEMP. ABANDONED
- TEST WELL
- WATER INJECTION
- WATER SUPPLY
- WATER DISPOSAL
- DRILLING

Field Status

- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED

Unit Status

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED



Utah Oil Gas and Mining



PREPARED BY: DIANA MASON
DATE: 18-MAY-2007

Application for Permit to Drill

Statement of Basis

10/1/2007

Utah Division of Oil, Gas and Mining

Page 1

APD No	API WellNo	Status	Well Type	Surf Ownr	CBM
547	43-047-39333-00-00		OW	P	No
Operator	NEWFIELD PRODUCTION COMPANY		Surface Owner-APD		
Well Name	UTE TRIBAL 12-29-4-1		Unit		
Field	UNDESIGNATED		Type of Work		
Location	NWSW 29 4S 1E S 390 FSL 642 FWL GPS Coord (UTM) 592628E 4439651N				

Geologic Statement of Basis

The Ute Tribe owns the mineral rights for the proposed well. The BLM will be the agency responsible for evaluating and approving the drilling, casing and cement programs.

Brad Hill

10/1/2007

APD Evaluator

Date / Time

Surface Statement of Basis

The proposed location is approximately 29.1 road miles southeast of Myton, UT in the lower Pleasant Valley area. It is also about 14 air miles south east of Roosevelt, Utah. Pariette Draw is approximately 1/8 mile to the north. This draw contains a perennial stream somewhat consisting of irrigation runoff and seepage. It drains into the Green River approximately 9 miles downstream above Ouray, Utah. Poorly vegetated or barren flats surrounded by low hills characterize the local area. Access is by State and County and planned oil field development roads. Approximately 1.6 miles of new construction will be required to access this and other wells planned in the immediate area.

The proposed Ute Tribal 12-29-4-1 oil well location is in a bowl or rounded basin surrounded by low rocky hills. The bowl has a slight slope to the northwest. A side slope and slight drainage on the northwest will have to be diverted south around the location.

The Lamb Family Trust owns the surface of the location. Karl Lamb was contacted by telephone on September 11, 2007 and said he would not attend the pre-site visit. A signed surface use agreement and a cultural resource survey waiver exist. The minerals are owned by the United States Government and held in trust for the Ute Indian Tribe. Charles MacDonald of the BLM represented the Ute Indian Tribe.

The location appears to be a suitable site for drilling and operating a well.

Floyd Bartlett

9/14/2007

Onsite Evaluator

Date / Time

Conditions of Approval / Application for Permit to Drill

Category	Condition
Pits	A synthetic liner with a minimum thickness of 16 mils with a felt subliner shall be properly installed and maintained in the reserve pit.
Surface	Drainages adjacent to the proposed pad shall be diverted around the location.

ON-SITE PREDRILL EVALUATION

Utah Division of Oil, Gas and Mining

Operator NEWFIELD PRODUCTION COMPANY
Well Name UTE TRIBAL 12-29-4-1
API Number 43-047-39333-0 **APD No** 547 **Field/Unit** UNDESIGNATED
Location: 1/4,1/4 NWSW **Sec** 29 **Tw** 4S **Rng** 1E 390 FSL 642 FWL
GPS Coord (UTM) 592637 4439613 **Surface Owner**

Participants

Floyd Bartlett (DOGM), Kim Swasey (Newfield), Charles Macdonald (BLM).

Regional/Local Setting & Topography

The proposed location is approximately 29.1 road miles southeast of Myton, UT in the lower Pleasant Valley area. It is also about 14 air miles south east of Roosevelt, Utah. Pariette Draw is approximately 1/8 mile to the north. This draw contains a perennial stream somewhat consisting of irrigation runoff and seepage. It runs into the Green River approximately 9 miles downstream above Ouray, Utah. Poorly vegetated or barren flats surrounded by low hills characterize the local area. Access is by State and County and planned oil field development roads. Approximately 1.6 miles of new construction will be required to access this and other wells planned in the immediate area.

The proposed Ute Tribal 12-29-4-1 oil well location is in a bowl or rounded basin surrounded by low rocky hills. The bowl has a slight slope to the northwest. A side slope and slight drainage on the northwest will have to be diverted south around the location.

Surface Use Plan

Current Surface Use

Grazing

New Road

Miles	Well Pad		Src Const Material	Surface Formation
1.6	Width 199	Length 290	Onsite	UNTA

Ancillary Facilities N

Waste Management Plan Adequate? Y

Environmental Parameters

Affected Floodplains and/or Wetland N

Flora / Fauna

Mostly barren. A few plants of broom snakeweed, Gardiner saltbrush and shadscale exist.

Cattle, prairie dogs, antelope, small mammals and birds.

Soil Type and Characteristics

Shallow rocky sandy clay loam. Some picturesque rock formations exist to the west of the location

Erosion Issues N

Sedimentation Issues N

Site Stability Issues N

Drainage Diversion Required Y

Berm Required? N

Erosion Sedimentation Control Required? N

Paleo Survey Run? N

Paleo Potential Observed? N

Cultural Survey Run? N

Cultural Resources?

Reserve Pit

Site-Specific Factors

Site Ranking

Distance to Groundwater (feet) 75 to 100

10

Distance to Surface Water (feet) >1000

0

Dist. Nearest Municipal Well (ft) >5280

0

Distance to Other Wells (feet) >1320

0

Native Soil Type Mod permeability

10

Fluid Type Fresh Water

5

Drill Cuttings Normal Rock

0

Annual Precipitation (inches) <10

0

Affected Populations <10

0

Presence Nearby Utility Conduits Not Present

0

Final Score

25

1

Sensitivity Level

Characteristics / Requirements

40' x 80' x 8' deep located in an area of cut on the northwest side of the location. A pit liner is required. Newfield commonly uses a 16 mil liner.

Closed Loop Mud Required? N

Liner Required? Y

Liner Thickness 16

Pit Underlayment Required? Y

Other Observations / Comments

Floyd Bartlett

Evaluator

9/14/2007

Date / Time



UTE INDIAN TRIBE

Energy and Minerals Department

P.O. Box 70
988 South 7500 East
Fort Duchesne, Utah 84026

Phone: 435-725-4040

Fax: 435-722-9270

Email: energy_minerals@utetribes.com

August 15, 2007

Mr. Gil Hunt, Director, Oil & Gas
Utah Division of Oil, Gas and Mining
P.O. Box 145801
Salt Lake City, Utah 84114-5801

Re: Newfield Production Company Exception Locations – Monument Buttes

Gentleman:


Due to topographic or environmental situations, Newfield has had to stake certain obligation wells for 2007 in areas that require an exception location approval from the Utah Division of Oil, Gas & Mining along with Tribal concurrence for same.

Attached are three (3) letters, along with accompanying support data, from Newfield to the Tribe requesting Tribal consent for seven (7) exception locations. Three (3) of the wells have been resolved through other means, these being the Ute Tribal 12-29-4-1, Ute Tribal 6-25-4-1 and the 14-24-4-1. The four (4) exception locations requiring Tribal consent are as follows: Ute Tribal 6-22-4-1, 16-29-4-1, 6-30-4-1 and 1-7-5-2

Pursuant to Tribal Business Committee Resolution 06-217 dated October 25, 2006, the Tribe entered into an Exploration and Development Agreement with Newfield Production Company effective February 23, 2007. Under this contract, Newfield is required to drill twelve (12) wells per year in order to meet its contractual obligations with the Tribe.

By this letter, the Tribe hereby consents to Newfield's proposed exception locations and requests that your Agency approve same.

Thank you for your consideration in this matter. If you have any questions or need any additional information, please contact Mr. Lynn Becker, Director, Energy and Minerals Department at 435-725-4972.


Curtis Cesspooch
Chairman, Tribal Business Committee

RECEIVED

AUG 23 2007


DIV. OF OIL, GAS & MIN.

Cc: Dinah Peltier-BIA

William Stringer-BLM

Kelly Donohoue-Newfield

Newfield Exception Location Monument Butte EDA

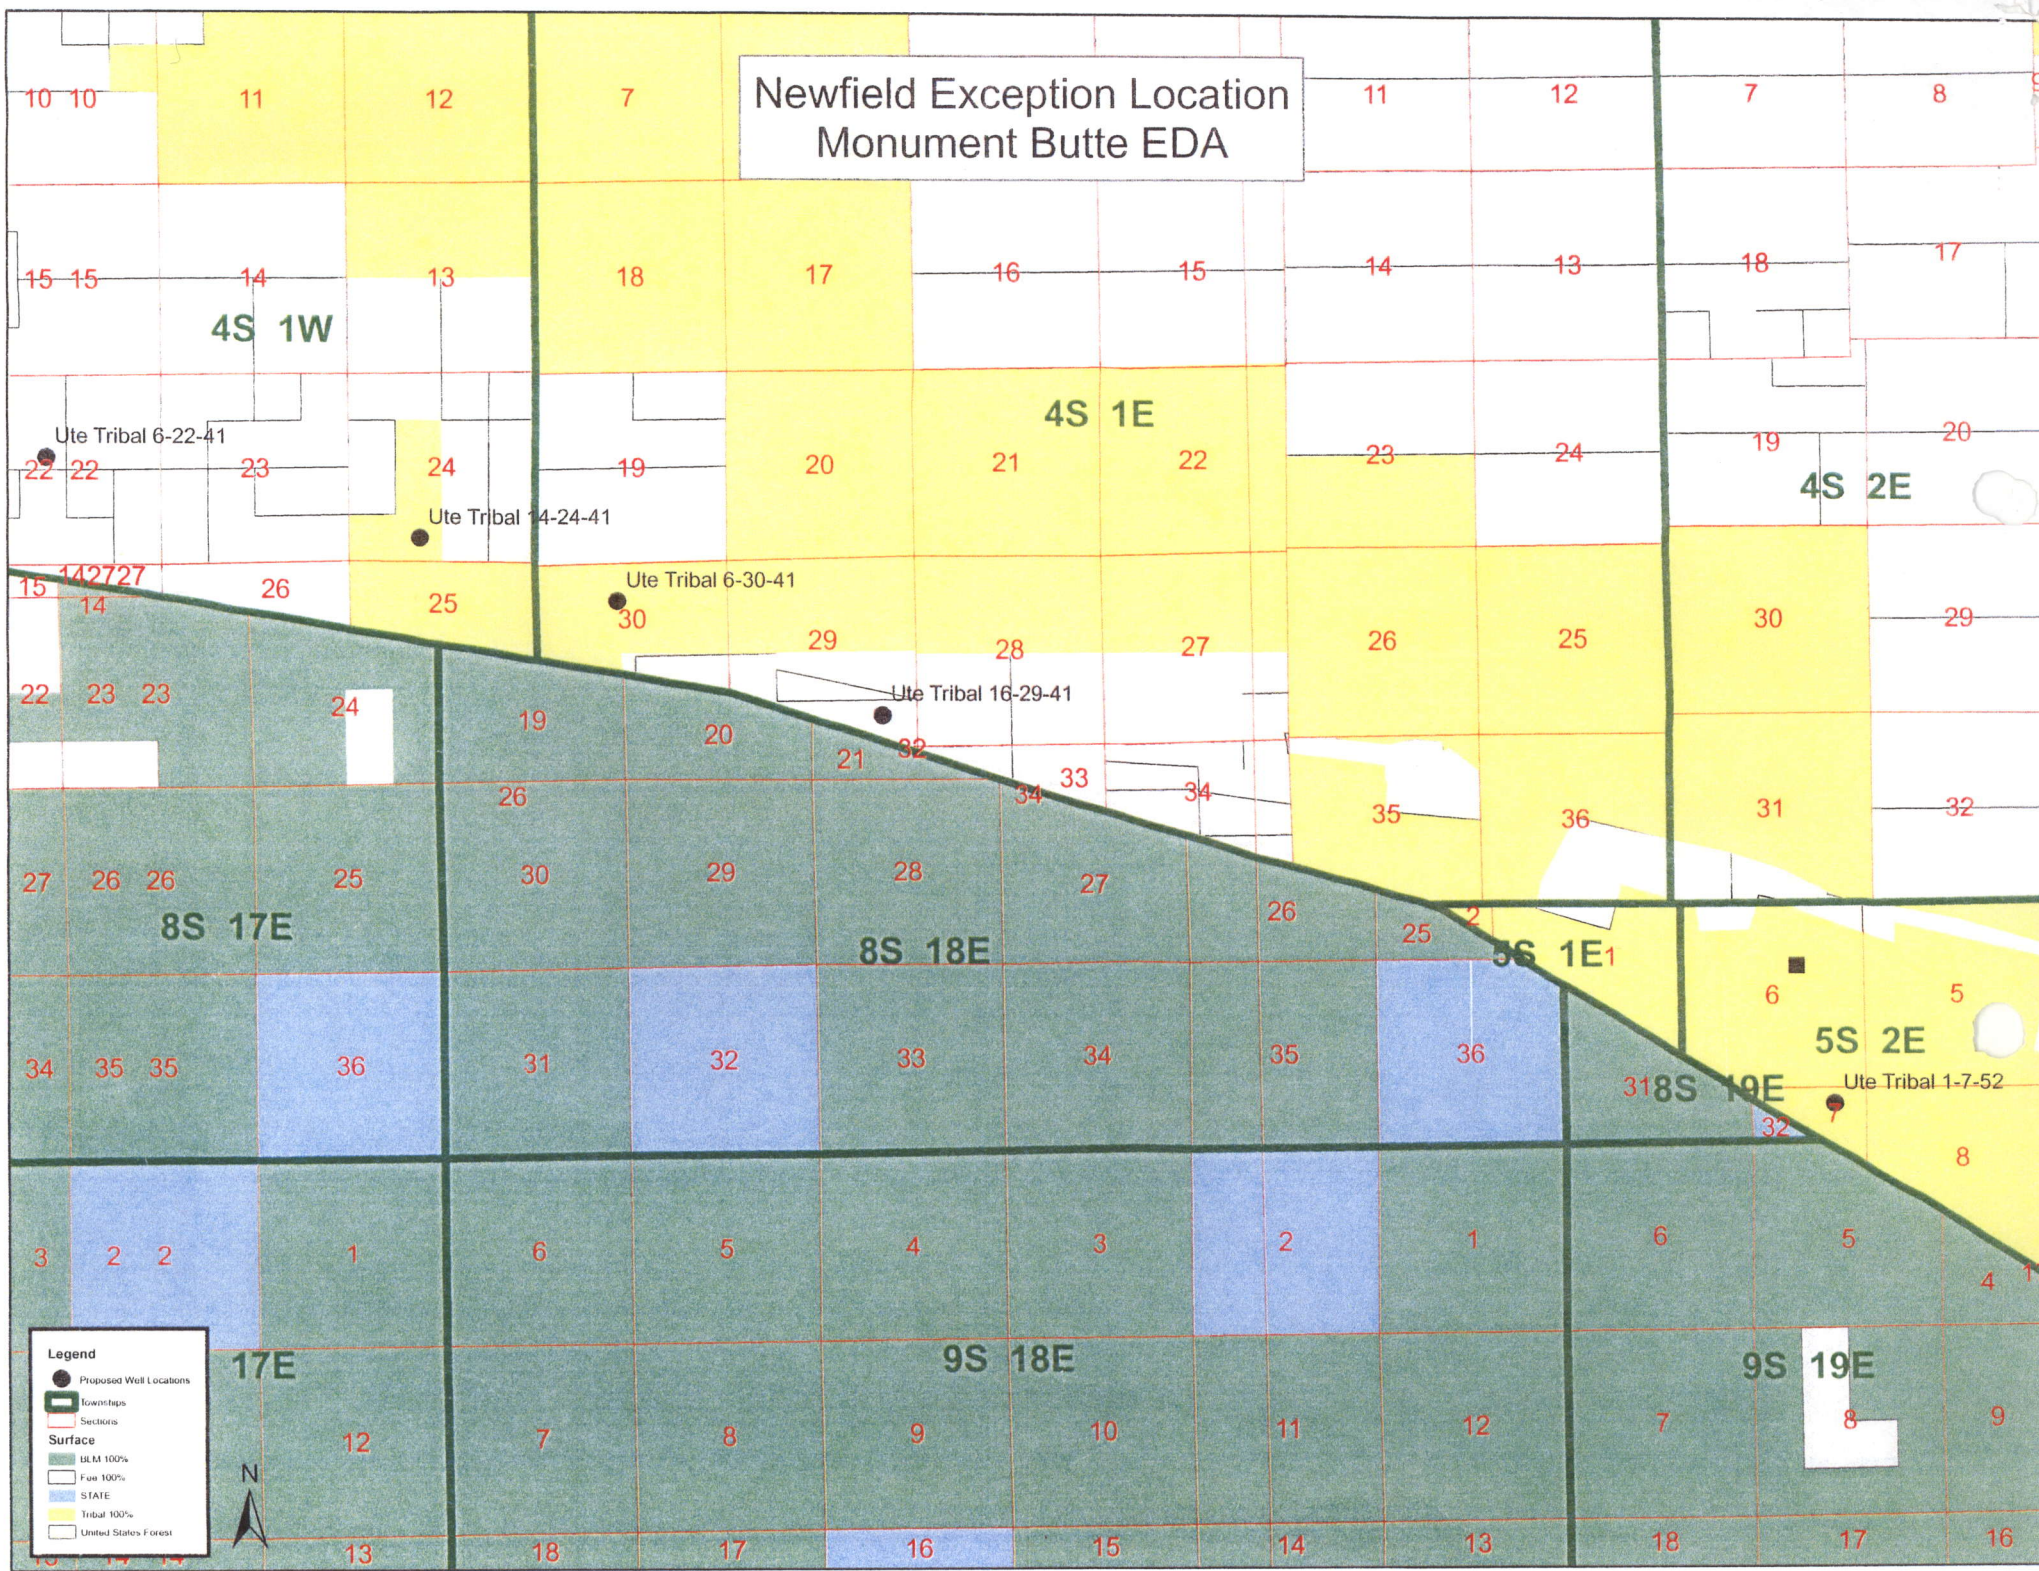



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil Gas and Mining

JOHN R. BAZA
Division Director

October 1, 2007

Newfield Production Company
Rt. #3, Box 3630
Myton, UT 84052

Re: Ute Tribal 12-29-4-1 Well, 390' FSL, 642' FWL, NW SW, Sec. 29, T. 4 South, R. 1 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

Appropriate information has been submitted to DOGM and administrative approval of the requested exception location is hereby granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-39333.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
UTE INDIAN TRIBE





JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil Gas and Mining

JOHN R. BAZA
Division Director

October 1, 2007

Newfield Production Company
Rt. #3, Box 3630
Myton, UT 84052

Re: Ute Tribal 12-29-4-1 Well, 390' FSL, 642' FWL, NW SW, Sec. 29, T. 4 South, R. 1 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

Appropriate information has been submitted to DOGM and administrative approval of the requested exception location is hereby granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-39333.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal Office

Operator: Newfield Production Company
Well Name & Number Ute Tribal 12-29-4-1
API Number: 43-047-39333
Lease: 2OG0005609

Location: NW SW **Sec.** 29 **T.** 4 South **R.** 1 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281 (801) 733-0983 home

3. Reporting Requirements


All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)

6. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

NEWFIELD

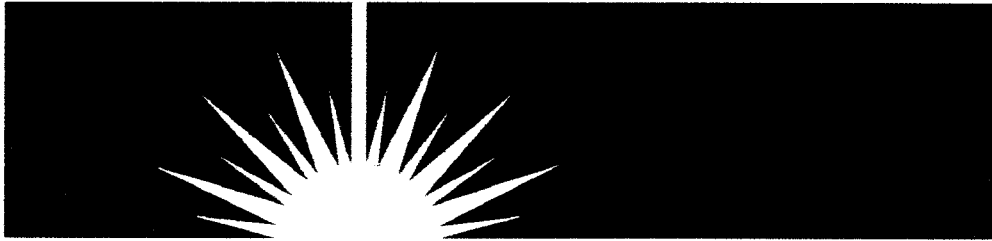

July 21, 2008

State of Utah
Division of Oil, Gas & Mining
Attn: Diana Whitney
1594 West North Temple - Suite 1210
P.O. Box 145801
Salt Lake City, Utah 84114-5801

RE: Amended Application for Permit to Drill, Ute Tribal 12-29-4-1.

Dear Diana:

Enclosed find the amended APD for the Ute Tribal 12-29-4-1. Since submission there have been some topographic changes due to exceptional spacing issues. The well location footages have changed to 464' FSL and 686' FWL. Distance from well to nearest property or lease line is approx. 464' f/lease line. The elevation is now 4906' GL. The proposed name has been changed to the **Ute Tribal 12-29-4-1E**. The proposed access road and proposed pipeline infrastructure will remain the same. If you have any questions, feel free to give either Kevan Stevans or myself a call.

Sincerely,

Mandie Crozier
Regulatory Specialist

enclosures

RECEIVED
JUL 25 2008
DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER



FORM APPROVED
OMB No. 1004-0136
Expires January 31, 2004

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. 20G0005609
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name Ute
2. Name of Operator Newfield Production Company		7. If Unit or CA Agreement, Name and No. N/A
3a. Address Route #3 Box 3630, Myton UT 84052	3b. Phone No. (include area code) (435) 646-3721	8. Lease Name and Well No. Ute Tribal 12-29-4-1E
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NW/SW (Lot#1) 464' FSL 686' FWL 592641X 40.10414 At proposed prod. zone 44396744 -109.91309		9. API Well No. 43-047-39333
10. Field and Pool, or Exploratory Monument Butte		11. Sec., T., R., M., or Blk. and Survey or Area NW/SW Sec. 29, T4S R1E
14. Distance in miles and direction from nearest town or post office* Approximatley 29.1 miles southeast of Myton, Utah		12. County or Parish Uintah
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) Approx. 464' f/lse, NA' f/unit NA		13. State UT
16. No. of Acres in lease NA		17. Spacing Unit dedicated to this well 40 Acres
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. NA		20. BLM/BIA Bond No. on file WYB000493
19. Proposed Depth 6600'		21. Elevations (Show whether DF, KDB, RT, GL, etc.) 4906' GL
22. Approximate date work will start* 3rd Quarter 2008		23. Estimated duration Approximately seven (7) days from spud to rig release.

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

- | | |
|---|--|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature 	Name (Printed/Typed) Mandie Crozier	Date 7/21/08
Title Regulatory Specialist		
Approved by (Signature) 	Name (Printed/Typed) BRADLEY G. HILL	Date 07-31-08
Title Environmental Engineer	Office ENVIRONMENTAL ENGINEER	

Application approval does not warrant or certify the the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

COPY SENT TO OPERATOR

Date: 8-4-2008

Initials: KS

Federal Approval of this
Action is Necessary


RECEIVED

JUL 25 2008

DIV. OF OIL, GAS & MINING


T4S, R1E, U.S.B.&M.

S89°56'W - 80.27 (G.L.O.)

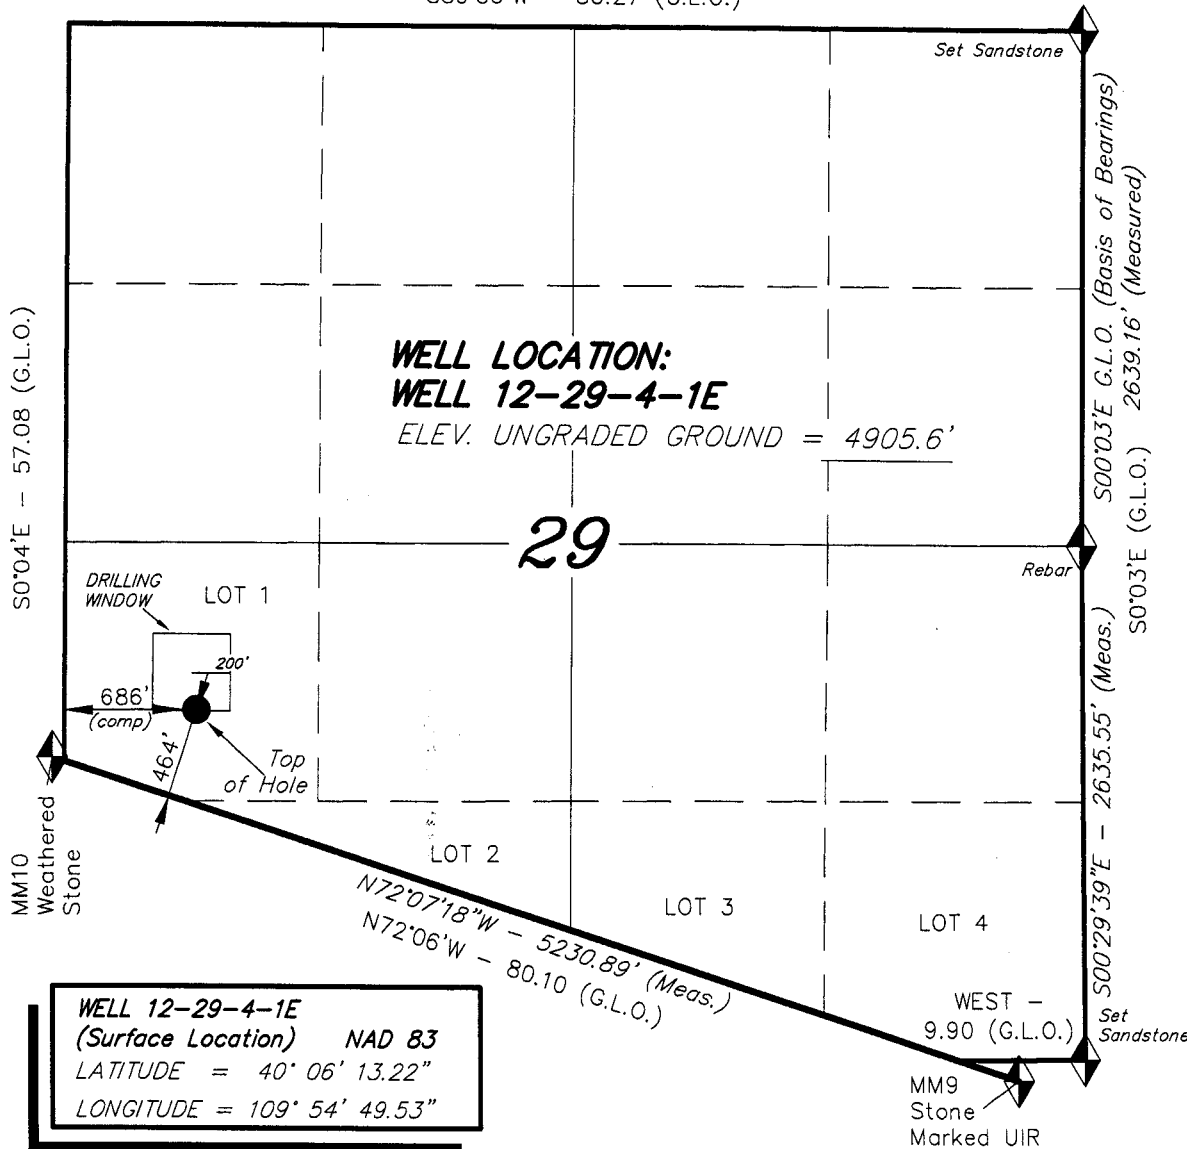

NEWFIELD PRODUCTION COMPANY


WELL LOCATION, WELL 12-29-4-1E,
LOCATED AS SHOWN IN THE NW 1/4 SW
1/4 (LOT 1) OF SECTION 29, T4S, R1E,
U.S.B.&M. UINTAH COUNTY, UTAH.



Notes:

1. The Top of hole head bears N71°41'04"E 786.06' from the Mile Marker 10.
2. Footages are measured at right angles to the section lines.

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS
PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS
MADE BY ME OR UNDER MY SUPERVISION AND THAT
THE SAME ARE TRUE AND CORRECT TO THE BEST OF
MY KNOWLEDGE AND BELIEF. No. 189377

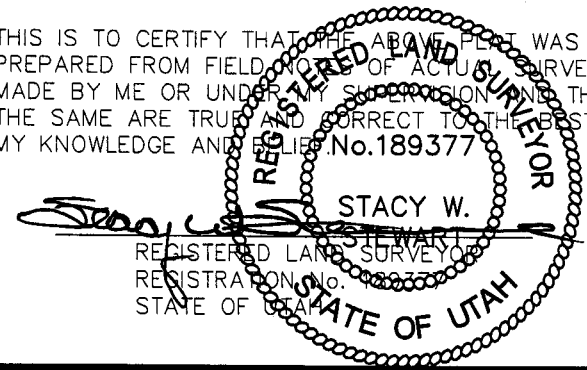

TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501

DATE SURVEYED: 10-19-07	SURVEYED BY: C.M.
DATE DRAWN: 11-14-07	DRAWN BY: F.T.M.
REVISED:	SCALE: 1" = 1000'


◆ = SECTION CORNERS LOCATED

BASIS OF ELEV;
U.S.G.S. 7-1/2 min QUAD (PARIETTE DRAW SW)

NEWFIELD PRODUCTION COMPANY

WELL 12-29-4-1E

Section 29, T4S, R1E, U.S.B.&M.




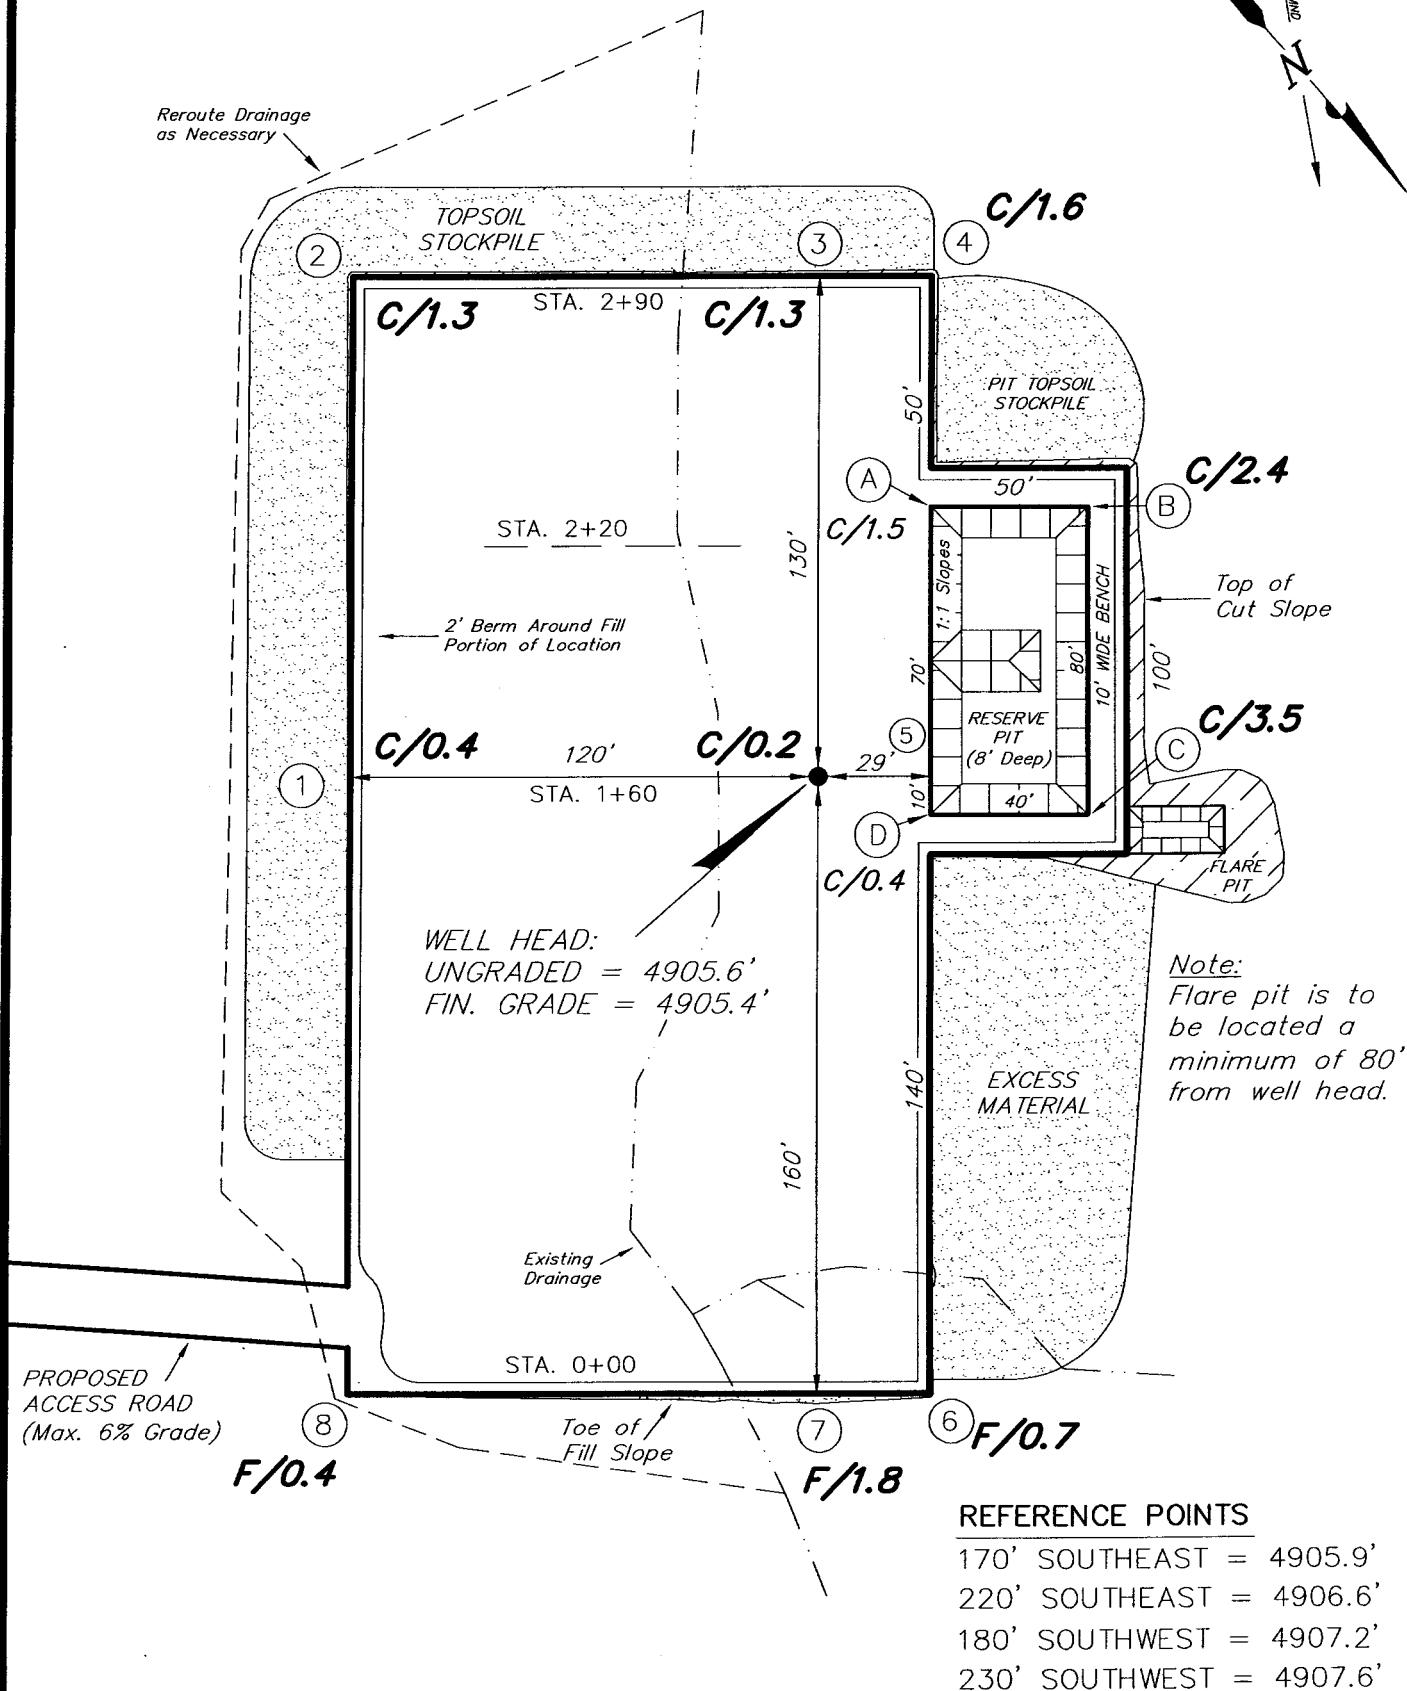


SURVEYED BY: C.M.	DATE SURVEYED: 10-19-07
DRAWN BY: F.T.M.	DATE DRAWN: 11-14-07
SCALE: 1" = 50'	REVISED:

Tri State
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078
 (435) 781-2501

NEWFIELD PRODUCTION COMPANY

CROSS SECTIONS WELL 12-29-4-1E

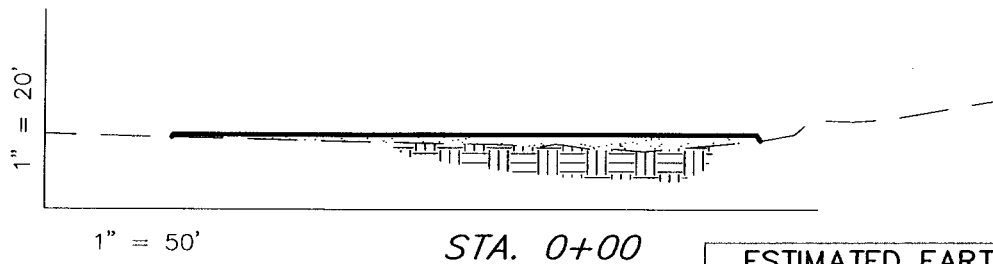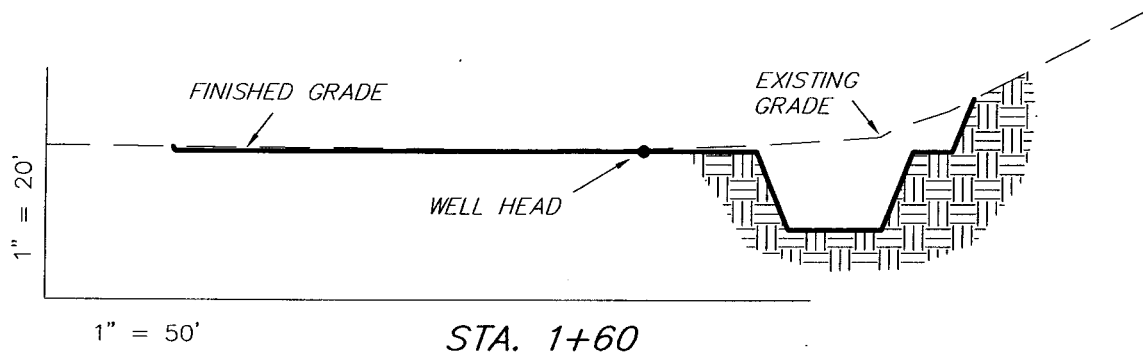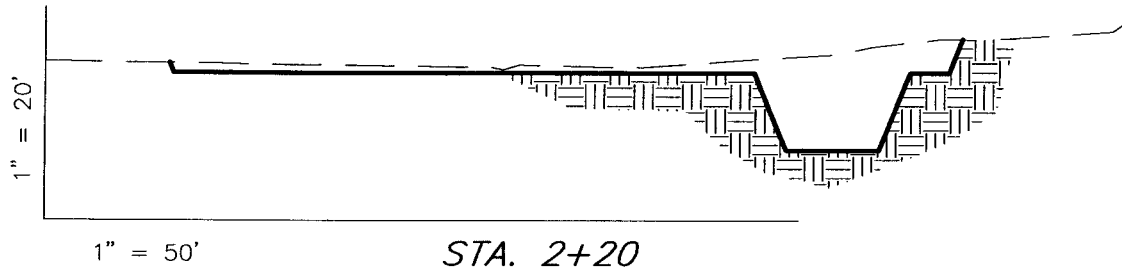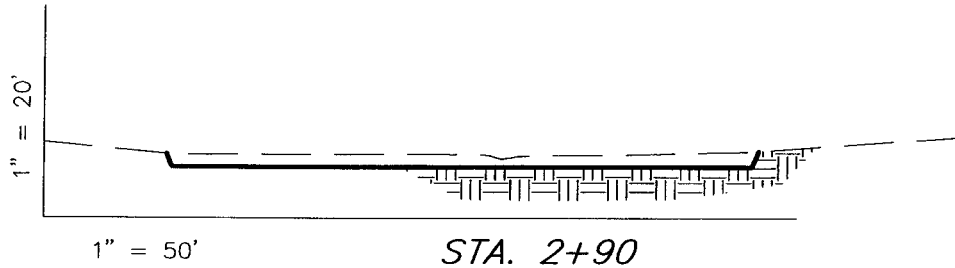

NOTE:
UNLESS OTHERWISE NOTED
CUT SLOPES ARE AT 1:1
FILL SLOPES ARE AT 1.5:1



ESTIMATED EARTHWORK QUANTITIES (No Shrink or swell adjustments have been used) (Expressed in Cubic Yards)				
ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	770	760	Topsoil is not included in Pad Cut	10
PIT	640	0		640
TOTALS	1.410	760	940	650

SURVEYED BY: C.M.	DATE SURVEYED: 10-19-07
DRAWN BY: F.T.M.	DATE DRAWN: 11-14-07
SCALE: 1" = 50'	REVISED:

Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD PRODUCTION COMPANY

TYPICAL RIG LAYOUT WELL 12-29-4-1E

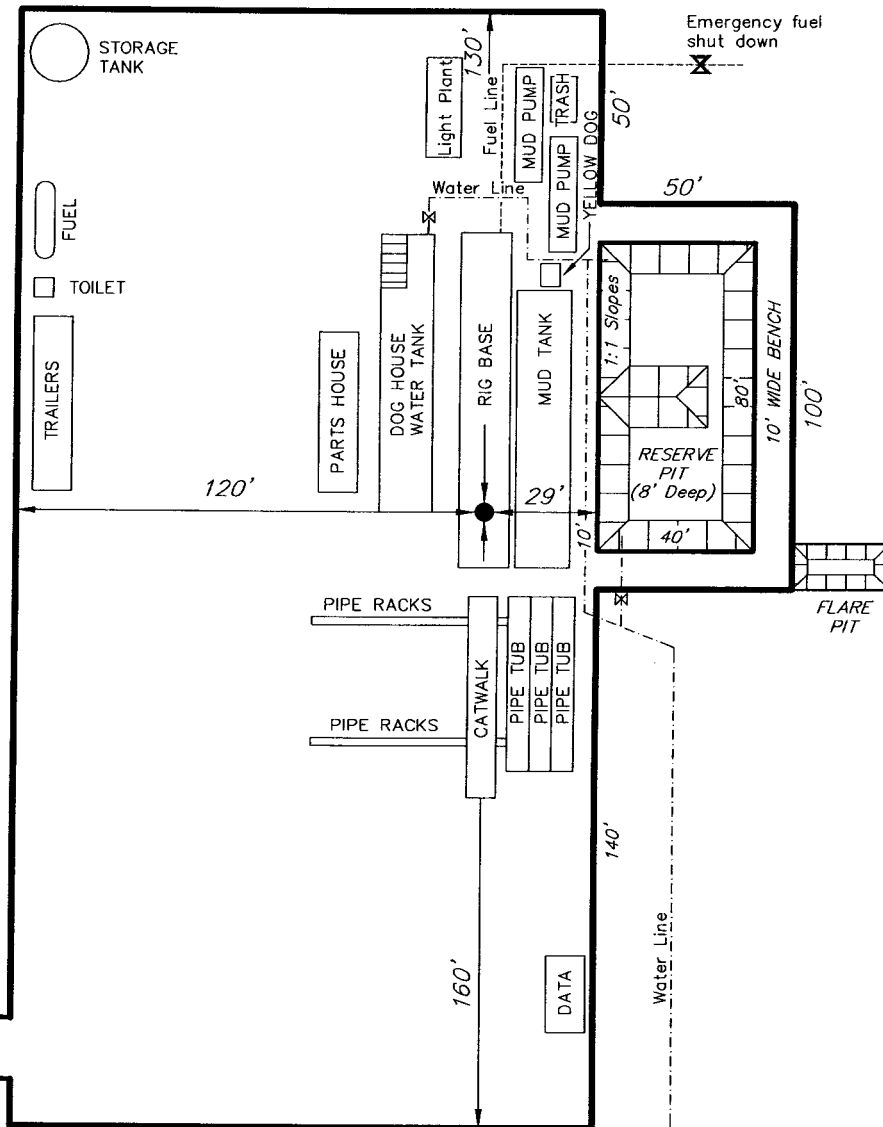

PROPOSED
ACCESS ROAD
(Max. 6% Grade)


SURVEYED BY: C.M.	DATE SURVEYED: 10-19-07
DRAWN BY: F.T.M.	DATE DRAWN: 11-14-07
SCALE: 1" = 50'	REVISED:

Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078



NEWFIELD
Exploration Company

Well 12-29-4-1E
SEC. 29, T4S, R1E, U.S.B.&M.



Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1 : 100,000

DRAWN BY: mw

DATE: 12-11-2007


Legend

Existing Road

Proposed Access

TOPOGRAPHIC MAP

"A"

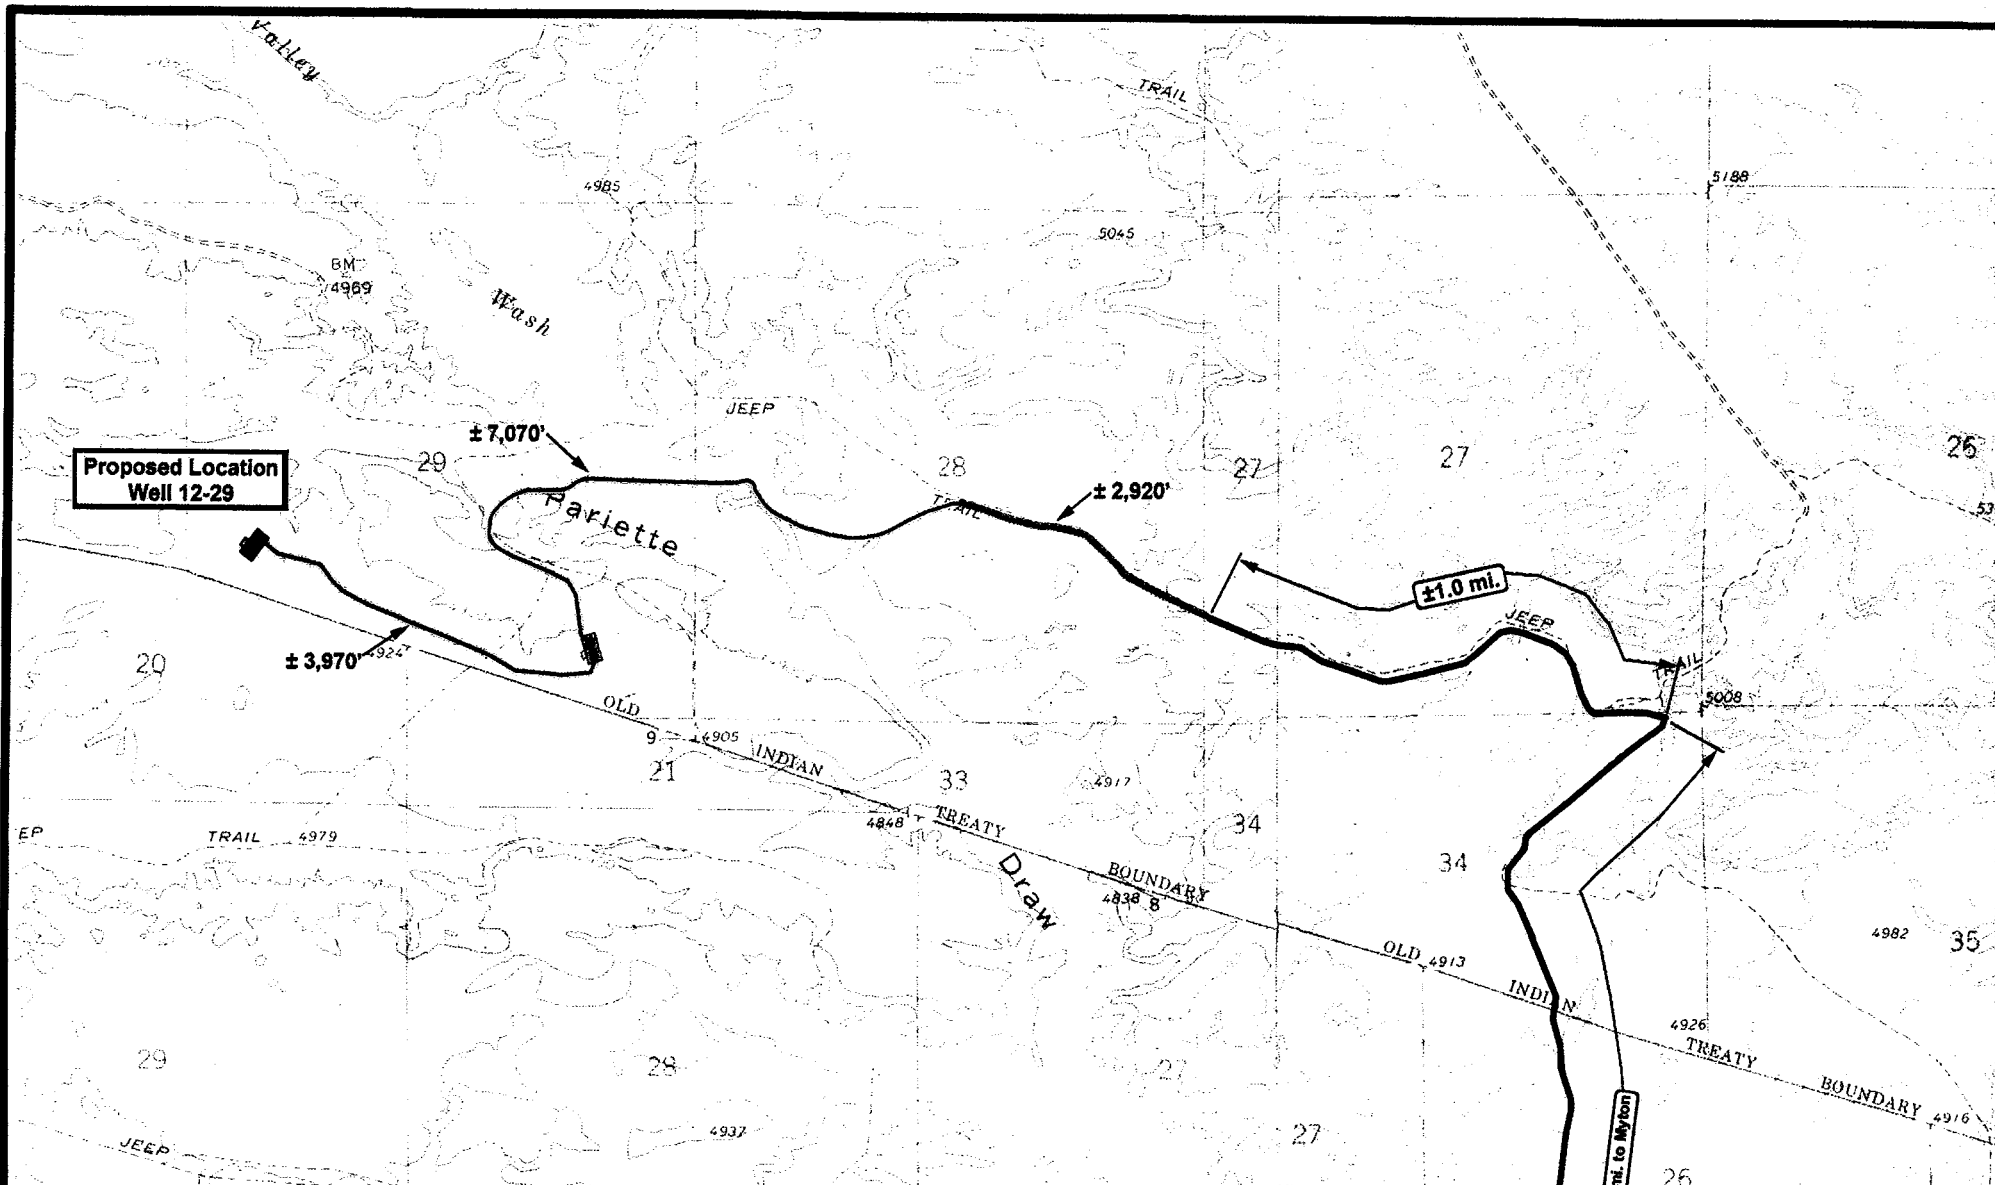

NEWFIELD
Exploration Company

Well 12-29-4-1E
SEC. 29, T4S, R1E, U.S.B.&M.



Tri-State
Land Surveying Inc.
(435) 781-2501

180 North Vernal Ave. Vernal, Utah 84078


SCALE: 1" = 2,000'

DRAWN BY: mw

DATE: 12-11-2007


Legend
Existing Road
Proposed Access

"B"

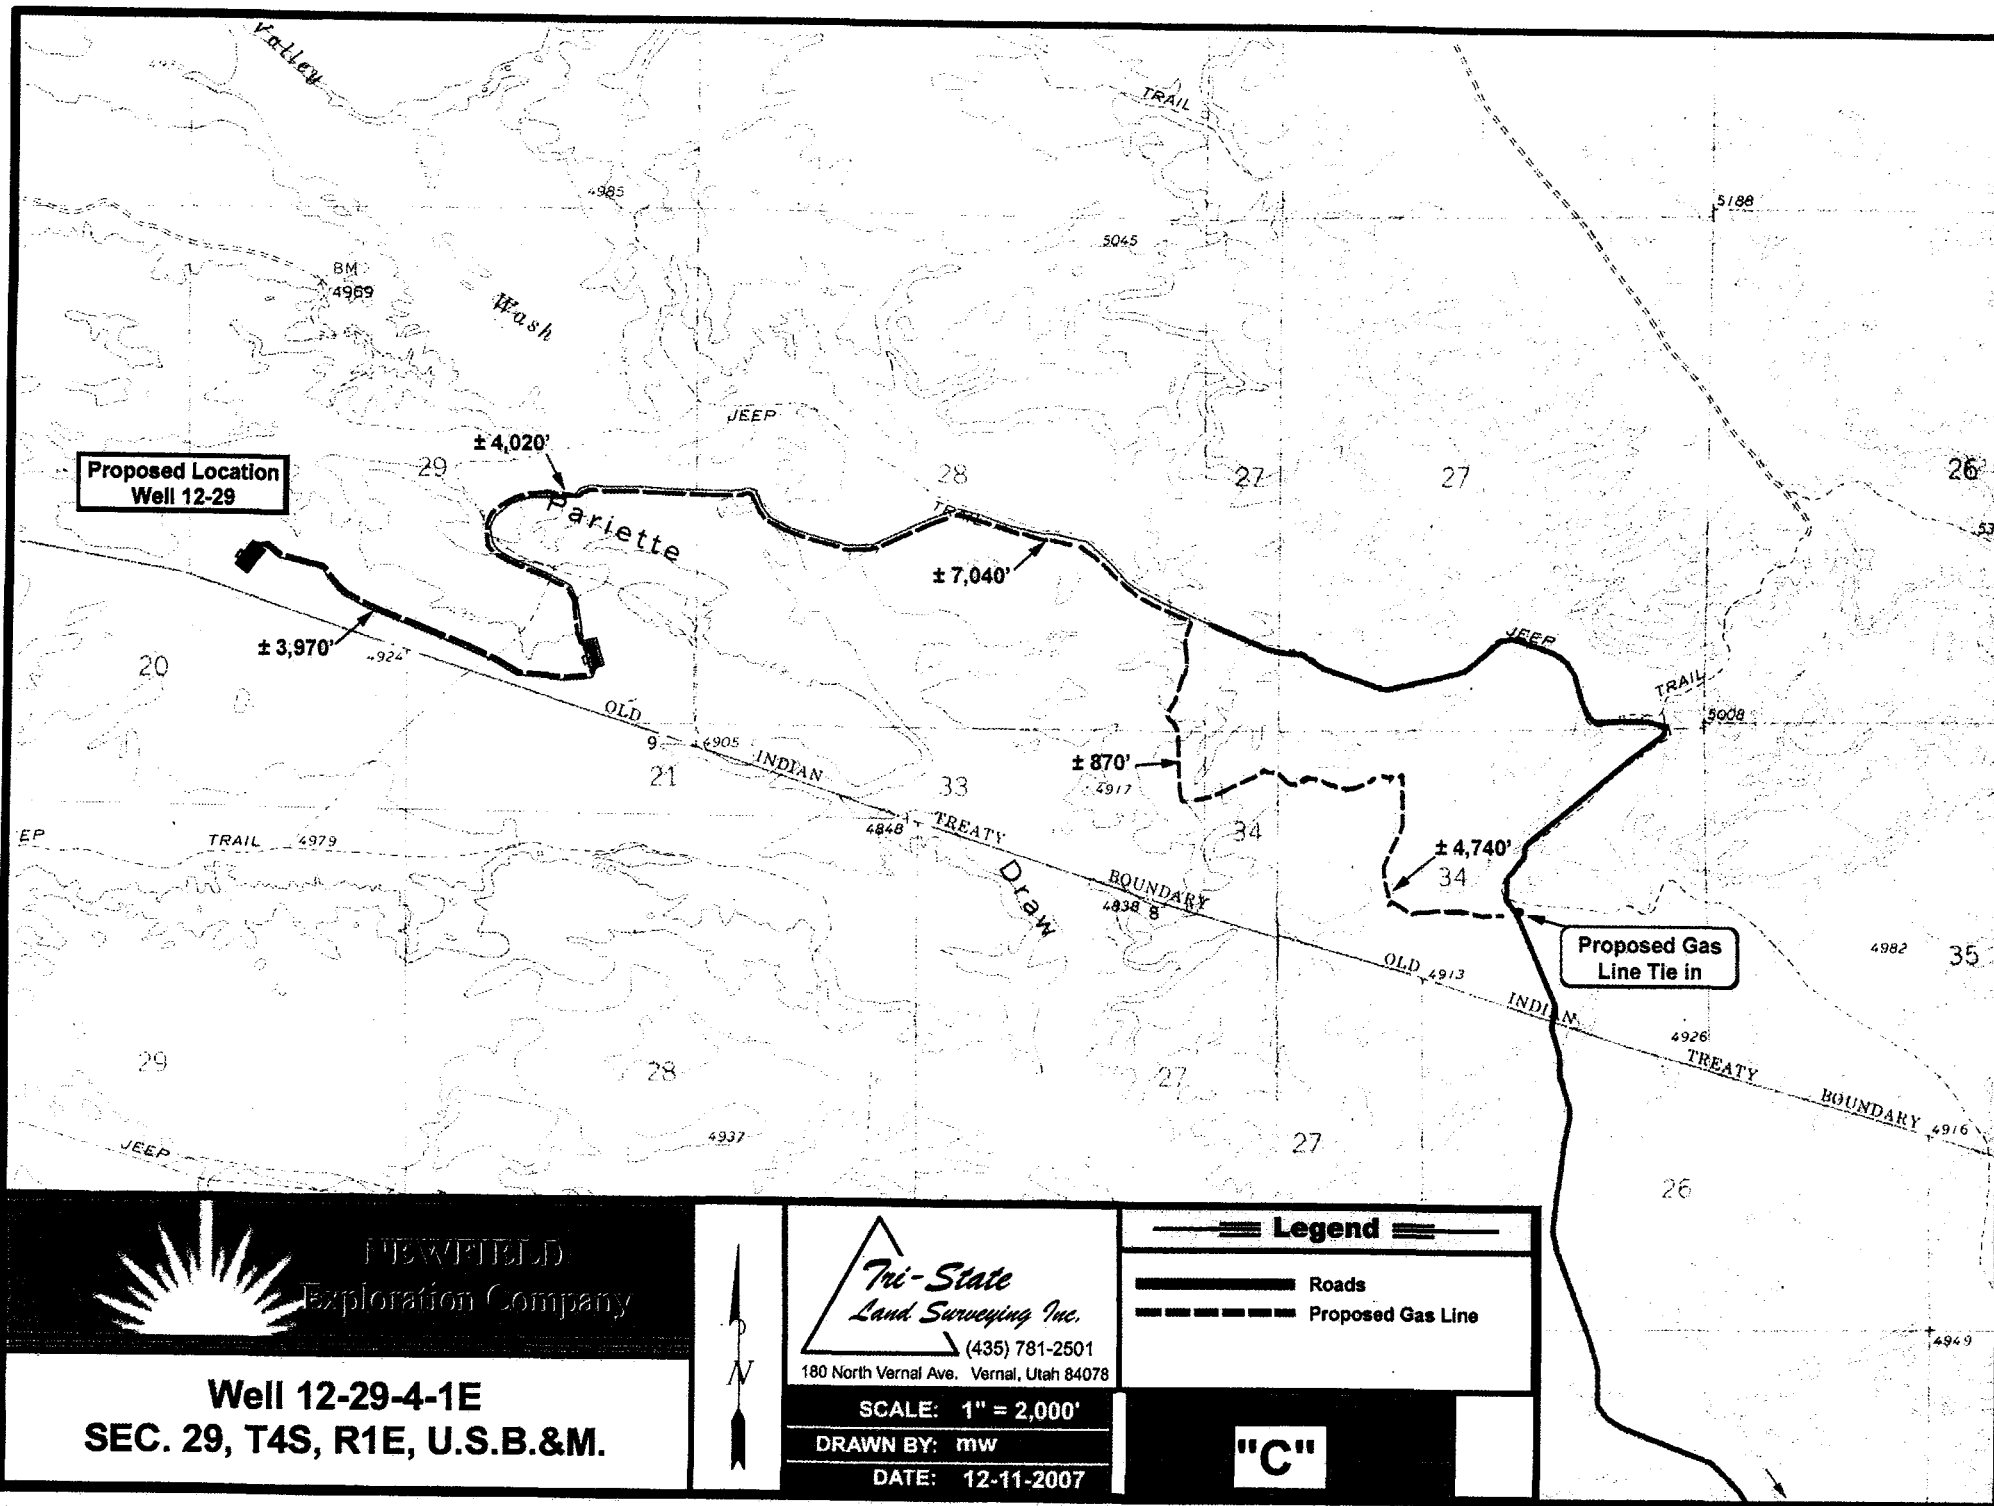

NEWFIELD
Exploration Company

Well 12-29-4-1E
SEC. 29, T4S, R1E, U.S.B.&M.



Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078


SCALE: 1" = 2,000'

DRAWN BY: mw

DATE: 12-11-2007


Legend
— Roads
- - - Proposed Gas Line

"C"

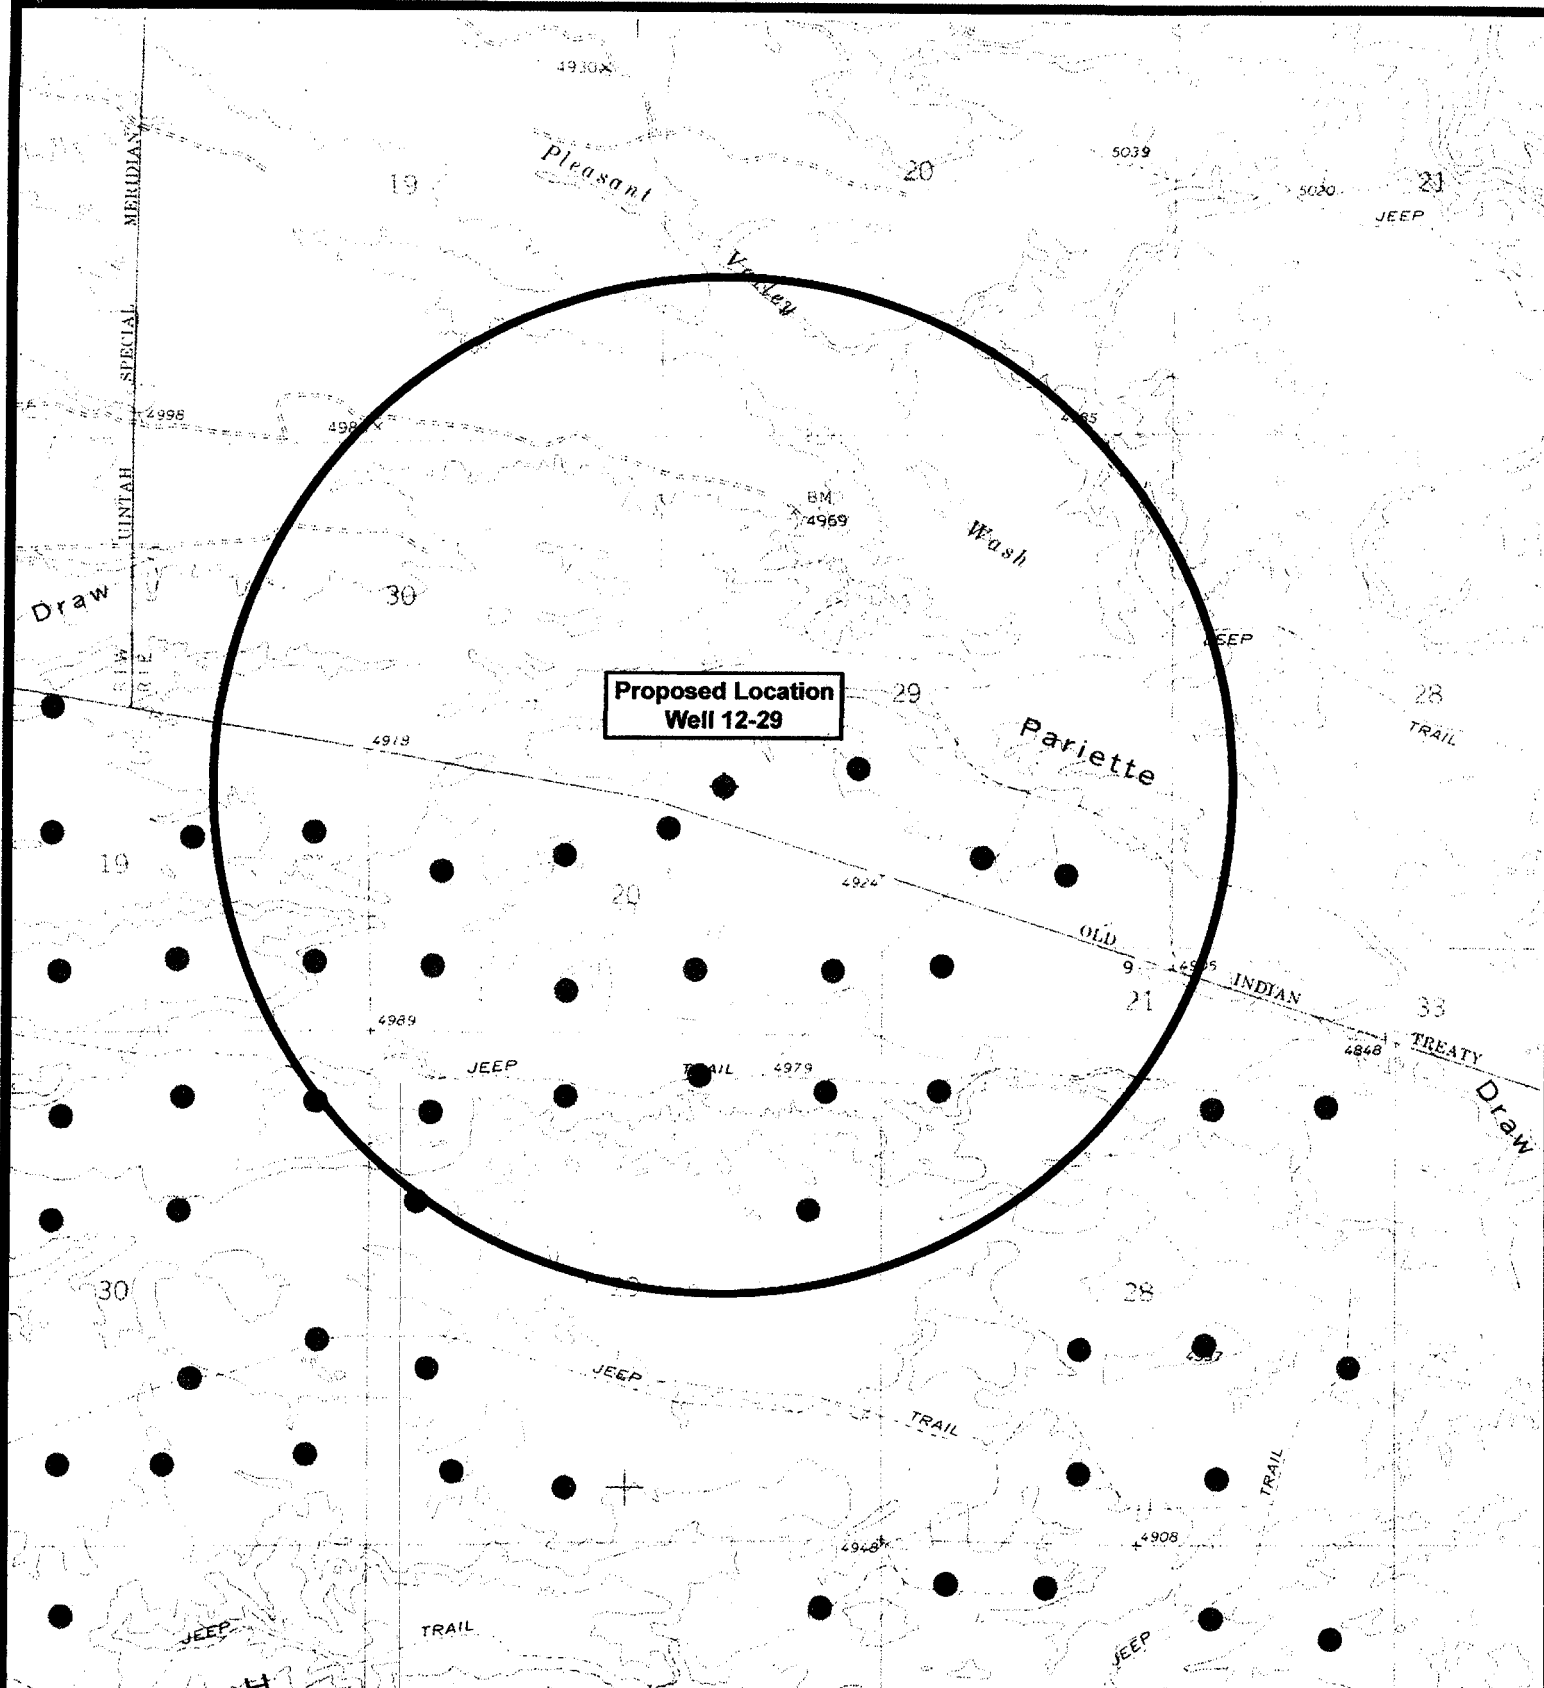

NEWFIELD
Exploration Company

Well 12-29-4-1E
SEC. 29, T4S, R1E, U.S.B.&M.



Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'


DRAWN BY: mw

DATE: 12-11-2007

Legend


- Location
- One-Mile Radius

Exhibit "B"

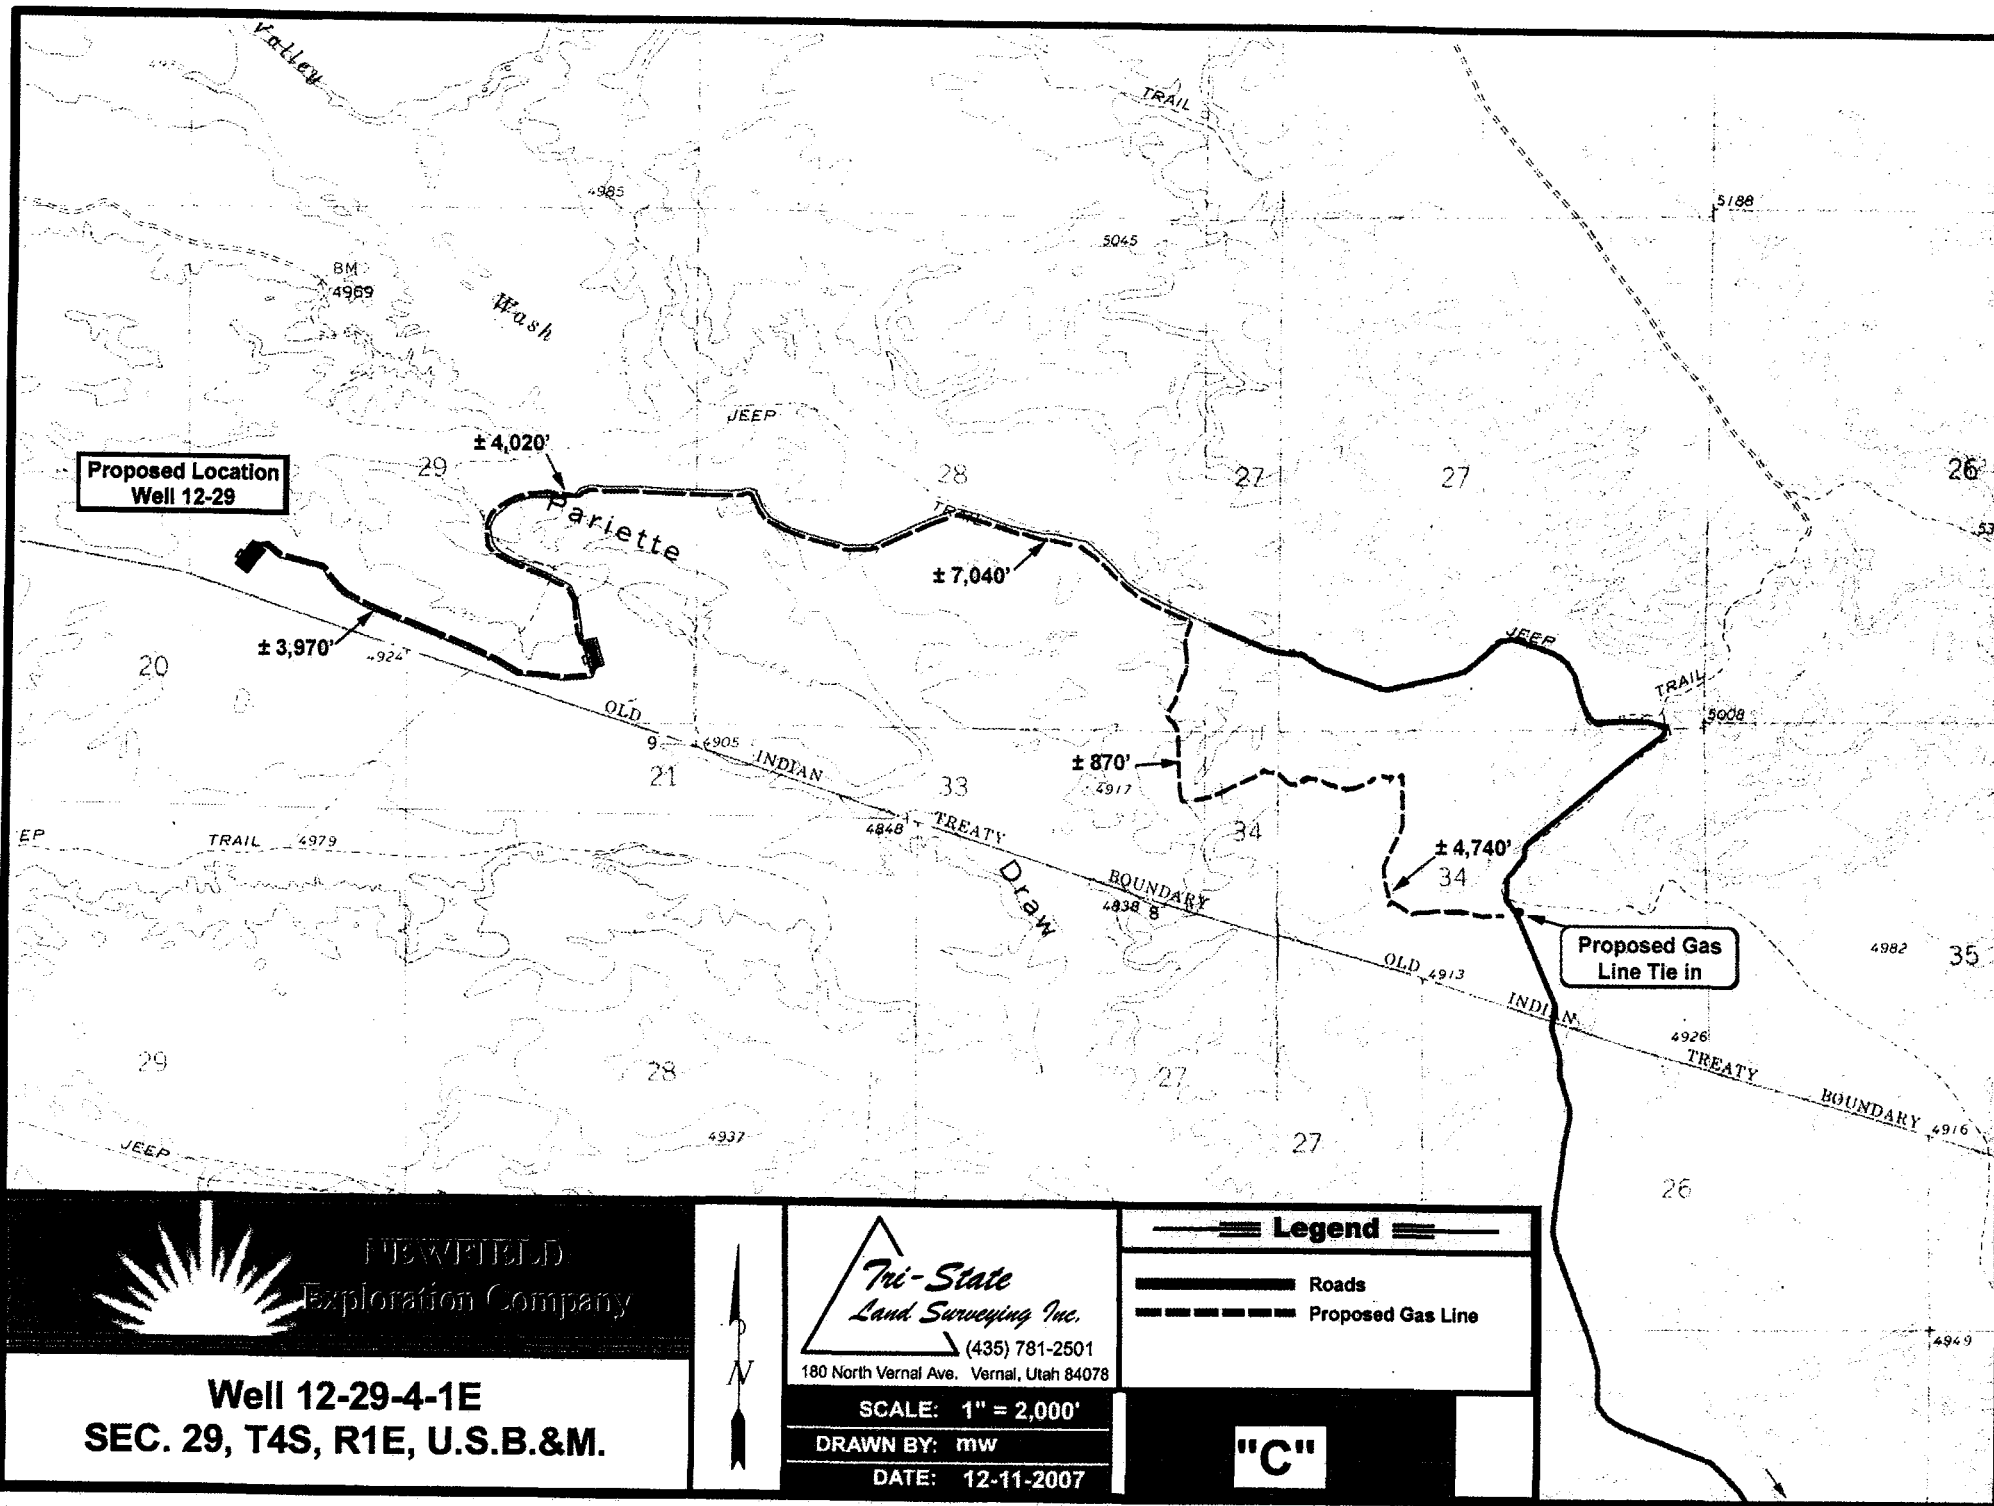

NEWFIELD
Exploration Company

Well 12-29-4-1E
SEC. 29, T4S, R1E, U.S.B.&M.



Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'

DRAWN BY: mw

DATE: 12-11-2007

Legend

- Roads
- Proposed Gas Line

"C"

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry a different reservoir.
Use "APPLICATION FOR PERMIT -" for such proposals

5. Lease Designation and Serial No.

2OG0005609

6. If Indian, Allottee or Tribe Name

NA

7. If Unit or CA, Agreement Designation

NA

8. Well Name and No.

UTE TRIBAL 12-29-4-1E

9. API Well No.

43-047-39333

10. Field and Pool, or Exploratory Area

UNDESIGNATED

11. County or Parish, State

UINTAH COUNTY, UT.

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

NEWFIELD PRODUCTION COMPANY

3. Address and Telephone No.

Rt. 3 Box 3630, Myton Utah, 84052 435-646-3721

4. Location of Well (Footage, Sec., T., R., m., or Survey Description)

464 FSL 686 FWL NW/SW Section 29, T4S R1E

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other **Permit Extension**

☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Newfield Production Company requests to extend the Permit to Drill this well for one year.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 09-30-08
By: [Signature]

COPY SENT TO OPERATOR

Date: 10.2.2008

Initials: KS

RECEIVED

SEP 29 2008

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Signed

[Signature]
Mandie Crozier

Title

Regulatory Specialist

Date

9/26/2008

CC: UTAH DOGM

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any:

CC: Utah DOGM

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RESET

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-39333
Well Name: Ute Tribal 12-29-4-1E
Location: NW/SW Section 29, T4S R1E
Company Permit Issued to: Newfield Production Company
Date Original Permit Issued: 10/1/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☒

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐


Signature

9/26/2008

Date


Title: Regulatory Specialist

Representing: Newfield Production Company

RECEIVED

SEP 29 2008

DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9			
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: 20G0005609			
1. TYPE OF WELL Oil Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE			
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		7. UNIT or CA AGREEMENT NAME:			
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052		8. WELL NAME and NUMBER: UTE TRIBAL 12-29-4-1E			
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0464 FSL 0686 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWSW Section: 29 Township: 04.0S Range: 01.0E Meridian: U		9. API NUMBER: 43047393330000			
PHONE NUMBER: 435 646-4825 Ext		9. FIELD and POOL or WILDCAT: UNDESIGNATED			
COUNTY: UINTAH		STATE: UTAH			
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA					
TYPE OF SUBMISSION	TYPE OF ACTION				
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/11/2009 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: </td> </tr> </table>		<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER:
<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER:			
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. Newfield Production requests to extend the permit to drill this well for one more year.					
Approved by the Utah Division of Oil, Gas and Mining Date: September 14, 2009 By: 					
NAME (PLEASE PRINT) Mandie Crozier		PHONE NUMBER 435 646-4825			
SIGNATURE N/A		TITLE Regulatory Tech DATE 9/11/2009			



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047393330000

API: 43047393330000

Well Name: UTE TRIBAL 12-29-4-1E

Location: 0464 FSL 0686 FWL QTR NWSW SEC 29 TWP 040S RNG 010E MER U

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 10/1/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Mandie Crozier

Date: 9/11/2009

Title: Regulatory Tech **Representing:** NEWFIELD PRODUCTION COMPANY

Date: September 14, 2009

By:

RECEIVED September 11, 2009

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

MAY 17 2007



FORM APPROVED
OMB No. 1004-0137
Expires July 31, 2010

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. 14-20-H62-6279
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name UTE
2. Name of Operator Newfield Production Company		7. If Unit or CA Agreement, Name and No. NA
3a. Address Route #3 Box 3630, Myton UT 84052	3b. Phone No. (include area code) (435) 646-3721	8. Lease Name and Well No. Ute Tribal 12-29-4-1E
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NW/SW (LOT #1) 464' FSL 686' FWL At proposed prod. zone		9. API Well No. 43 047 39333
10. Field and Pool, or Exploratory Undesignated		11. Sec., T. R. M. or Blk. and Survey or Area Sec. 29, T4S R1E
12. County or Parish Uintah		13. State UT
14. Distance in miles and direction from nearest town or post office* Approximately 29.1 miles southeast of Myton, UT	15. Distance from proposed* location to nearest property or lease line, ft. Approx. 464' f/lse, NA' f/unit (Also to nearest drig. unit line, if any)	16. No. of acres in lease NA
17. Spacing Unit dedicated to this well 40 Acres	18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. NA	19. Proposed Depth 6,600'
20. BLM/BIA Bond No. on file RLB0010462	21. Elevations (Show whether DF, KDB, RT, GL, etc.) 4906' GL	22. Approximate date work will start* 3rd Qtr. 2010
23. Estimated duration (7) days from SPUD to rig release		24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, must be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the BLM.

25. Signature 	Name (Printed/Typed) Mandie Crozier	Date 4/29/10
Title Regulatory Specialist		
Approved by (Signature) 	Name (Printed/Typed) James H. Sparger	Date APR 29 2010
Title ACTING Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

CONDITIONS OF APPROVAL ATTACHED

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

NOTICE OF APPROVAL

UDOGM

09BM 0853A

RECEIVED
GREEN RIVER DISTRICT
VERNAL FIELD OFFICE
2010 APR 22 PM 12 02
DEPT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

MAY 19 2010

DIV. OF OIL, GAS & MINING



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE
170 South 500 East VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company:	Newfield Production Company	Location:	Lot 1, Sec. 29, T4S, R1E
Well No:	Ute Tribal 12-29-4-1E	Lease No:	14-20-H62-6279
API No:	43-047-39333	Agreement:	N/A

OFFICE NUMBER: (435) 781-4400
OFFICE FAX NUMBER: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Construction Activity (Notify Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist)	- The Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist shall be notified at least 48 hours in advance of any construction activity. The Ute Tribal office is open Monday through Thursday.
Construction Completion (Notify Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist)	- Upon completion of the pertinent APD/ROW construction, notify the Ute Tribe Energy & Minerals Dept. for a Tribal Technician to verify the Affidavit of Completion. Notify the BLM Environmental Scientist prior to moving on the drilling rig.
Spud Notice (Notify BLM Petroleum Engineer)	- Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify BLM Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to running casing and cementing all casing strings to: ut_vn_opreport@blm.gov .
BOP & Related Equipment Tests (Notify BLM Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify BLM Petroleum Engineer)	- Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

**Private Surface
COAs are not required**

***DOWNHOLE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

SITE SPECIFIC DOWNHOLE COAs:

- Logging program shall be run from Total Depth to Surface casing.
- Gamma Ray Log shall be run from Total Depth to Surface.

Variances Granted:

Mud Drilling:

- Blooie line discharge 100' from the well bore, variance granted for blooie line discharge to be 80' from the well bore.

Air Drilling:

- Properly lubricated and maintained rotating head, variance granted to use a properly maintained and lubricated diverter bowl in place of a rotating head.
- Blooie line discharge 100' from the well bore, variance granted for blooie line discharge to be 35' from the well bore.
- Compressors located in the opposite direction from the blooie line a minimum of 100' from the well bore. Variance granted for air compressors to be located within 50 feet from the well bore and opposite from the blooie line.
- Automatic igniter. Variance granted for igniter due to the zone being non-hydrocarbon bearing.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.

- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**

- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.

- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.
- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.

- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

^{Spud}
BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig
Name/# Ross Rig # 29 Submitted By Alvin
Nielsen Phone Number 435-823-
7468
Well Name/Number Ute Tribal 12-29-4-
1E
Qtr/Qtr NW/SW Section 29 Township 4S
Range 1E
Lease Serial Number 14-20-H62-
6279
API Number 43-047-
39333

Spud Notice – Spud is the initial spudding of the well, not drilling out below a casing string.

Date/Time 5/20/10 9:00 AM ☒
PM ☐

Casing – Please report time casing run starts, not cementing times.

- ☒ Surface Casing
- ☐ Intermediate Casing
- ☐ Production Casing
- ☐ Liner
- ☐ Other

☒ Date/Time 5/20/10 3:00 AM ☐ PM

BOPE

☐ Initial BOPE test at surface casing point

- ☐ BOPE test at intermediate casing point
- ☐ 30 day BOPE test
- ☐ Other

Date/Time _____ AM ☐ PM ☐

Remarks Ross Rig # 29 spud the Ute Tribal 12-29-4-1E @ 9:00
AM on 5/20/10 & Run 85/8" casing @ 3:00 PM on 5/20/10.

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING
ENTITY ACTION FORM - FORM 6

OPERATOR: NEWFIELD PRODUCTION COMPANY
ADDRESS: RT. 3 BOX 3630
MYTON, UT 84052

OPERATOR ACCT. NO. N2695

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
B	99999	17400	4301350111	MON BUTTE EAST ST H-36-8-16	SWNE	36	8S	16E	DUCHESNE	5/21/2010	6/7/10
WELL 1 COMMENTS: GRRV BHL = N W N E											
A	99999	17627	4304739334	UTE TRIBAL 16-29-4-1E	SESE	29	4S	1E	UINTAH	5/17/2010	6/7/10
GRRV											
B	99999	17400	4304740534 4304740411	CASTLE DRAW ST N-2-9-17	NENW	2	9S	17E	surface UINTAH	5/19/2010	6/7/10
GRRV BHL = S E N W Duchesne Co Sec 2 T 9 S R 17 E											
A	99999	17628	4304739333	UTE TRIBAL 12-26-4-1E	NWSW	29	4S	1E	UINTAH	5/20/2010	6/7/10
GRRV											
A	99999	17629	4304750947	HANCOCK 5-23-4-1	SWNW	23	4S	1W 1E	UINTAH	5/19/2010	6/7/10
WELL 5 COMMENTS: GRRV											
B	99999	17400	4301334071	BLACKJACK N-33-8-17	NWSW	33	8S	17E	Duchesne UINTAH	5/7/2010	6/7/10
WELL 5 COMMENTS: GRRV BHL = N W S W											


ACTION CODES (See instructions on back of form)

- A - new entity for new well (single well only)
- B - well to existing entity (group or unit well)
- C - from one existing entity to another existing entity
- D - well from one existing entity to a new entity
- E - other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

RECEIVED
MAY 20 2010

DIV. OF OIL, GAS & MINING

Signature: 
Jentri Park
Production Clerk
Date: 05/20/10

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

SUBMIT IN TRIPLICATE - Other Instructions on page 2

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

NEWFIELD PRODUCTION COMPANY

3a. Address Route 3 Box 3630

Myton, UT 84052

3b. Phone (include area code)

435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

NWSW Section 29 T4S R1E

5. Lease Serial No.

14-20-H62-6279

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or

8. Well Name and No.

UTE TRIBAL 12-29-4-1E

9. API Well No.

4304739333

10. Field and Pool, or Exploratory Area

MYTON/TRIBAL EDA

11. County or Parish, State

DUCHESNE, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Spud Notice _____
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 5/20/10 MIRU Ross # 29. Spud well @ 9:00 AM. Drill 315' of 12 1/4" hole with air mist. TIH W/ 7 Jt's 8 5/8" J-55 24# casing. Set @ 315.49' KB. On 5/22/10 cement with 160 sks of class "G" w/ 2% CaCL₂ + 1/4# per sk Cello Flake mixed @ 15.8 ppg with 1.17 cf/sk yield. Returned 7 bbls cement to pit. WOC.

I hereby certify that the foregoing is true and correct (Printed/ Typed)

Mitch Benson

Signature

Title

Drilling Foreman

Date

05/22/2010

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on page 2)

RECEIVED

JUN 01 2010

DIV. OF OIL, GAS & MINING

NEWFIELD PRODUCTION COMPANY - CASING & CEMENT REPORT

8 5/8" CASING SET AT 315.49

LAST CASING 14 SET AT 7
 DATUM 13
 DATUM TO CUT OFF CASING 13
 DATUM TO BRADENHEAD FLANGE 13
 TD DRILLER 315 LOGGER _____
 HOLE SIZE 12 1/4"

OPERATOR Newfield Exploration Company
 WELL UTE TRIBAL 12-29-4-1E
 FIELD/PROSPECT Monument Butte
 CONTRACTOR & RIG # Ross Rig #29

LOG OF CASING STRING:

PIECES	OD	ITEM - MAKE - DESCRIPTION		WT / FT	GRD	THREAD	CONDT	LENGTH
1		Well Head					A	0.95
7	8 5/8"	ST&C Casing (43.12' shoe jt)		24	J-55	STC	A	303.64
1		Guide Shoe					A	0.9
CASING INVENTORY BAL.		FEET	JTS	TOTAL LENGTH OF STRING				305.49
TOTAL LENGTH OF STRING		305.49	7	LESS CUT OFF PIECE				2
LESS NON CSG. ITEMS		1.85		PLUS DATUM TO T/CUT OFF CSG				12
PLUS FULL JTS. LEFT OUT		0		CASING SET DEPTH				315.49
TOTAL		303.64	7	} COMPARE				
TOTAL CSG. DEL. (W/O THRDS)		303.64	7					
TIMING								
BEGIN RUN CSG.	Spud	9:00 AM	5/20/2010	GOOD CIRC THRU JOB				Yes
CSG. IN HOLE		5:00 PM	5/20/2010	Bbls CMT CIRC TO SURFACE				7
BEGIN CIRC		1:24 PM	5/22/2010	RECIPROCATED PIPI				No
BEGIN PUMP CMT		1:36 PM	5/22/2010	BUMPED PLUG TO				
BEGIN DSPL. CMT		1:49 PM	5/22/2010					400
PLUG DOWN		1:55 PM	5/22/2010					

[illegible]

COMPANY REPRESENTATIVE

Mitch Benson

DATE 5/22/2010

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.


1. TYPE OF WELL: OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>		5. LEASE DESIGNATION AND SERIAL NUMBER: BIA 14-20-H62-6279
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: Route 3 Box 3630 CITY Myton STATE UT ZIP 84052		7. UNIT or CA AGREEMENT NAME:
4. LOCATION OF WELL: FOOTAGES AT SURFACE:		8. WELL NAME and NUMBER: UTE TRIBAL 12-29-4-1E
OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: NWSW, 29, T4S, R1E		9. API NUMBER: 4304739333
COUNTY: DUCHESNE		10. FIELD AND POOL, OR WILDCAT: MYTON/TRIBAL EDA
STATE: UT		

II. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will _____	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PLUG BACK <input type="checkbox"/> PRODUCTION (START/STOP) <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	<input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TEMPORARITLY ABANDON <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLAIR <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> WATER SHUT-OFF <input checked="" type="checkbox"/> OTHER: - Weekly Status Report
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of Work Completion: 06/14/2010			

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The above subject well was completed on 06-14-10, attached is a daily completion status report.

NAME (PLEASE PRINT) <u>Lucy Chavez-Naupoto</u>	TITLE <u>Administrative Assistant</u>
SIGNATURE 	DATE <u>06/15/2010</u>

(This space for State use only)

RECEIVED
JUN 21 2010
DIV. OF OIL, GAS & MINING

Daily Activity Report

Format For Sundry

UTE TRIBAL 12-29-4-1E**4/1/2010 To 8/30/2010****6/8/2010 Day: 1****Completion**

Rigless on 6/8/2010 - Ran CBL & perforated 1st stage. MIRU Perforators LLC WLT, Crane & lubricator & BJ Services. Frac 2 stage. Perforate the 3rd stage. SIWFN w/ 1110 BWTR. - NU frac head & Cameron BOP's. RU Hot oiler & test casing, frac head, frac valves & BOP to 4500 psi. RU WLT w/ mast & pack off tool. Run CBL under pressure. WLTD was 6512' w/ TOC @ 40'. RIH w/ 3 1/8" ported guns & perforate CP4 sds @ 6153- 60' w/ (11 gram, .36"EH, 16.82¢ pen. 120°) 3 spf for total of 21 shots. RD WLT & Hot Oiler. - MIRU Perforators LLC WLT, Crane & lubricator & BJ Services. Frac 2 stages & perforate the 3rd stage. SIWFN w/ 1110 BWTR.

Daily Cost: \$0**Cumulative Cost:** \$39,720

6/9/2010 Day: 2**Completion**

Rigless on 6/9/2010 - Frac & perforate remaining 3 stages. Flowback well. SIWFN w/ 2414 BWTR. - o psi on well. Pumped 16 bbls to fill csg. D3 sands were broke down, But rate & pressure were showing that both set of C sand were not broke down. Pumped 168 gals of acid. Still high pressure low rate. Shut down. RIH w/ dump bailer. Tagged sand @ 5338'. Dump acid. Pump & surge back well. Got C sand to breakdown. Frac Stage #3. Used an additional 785 bbls of wtr. Wait on water. Frac & perforate remaining stages as shown in Stimulation & perforations tabs. Flowback well @ est 3 BPM for 6 1/2 hrs. Rec 1170 BTF. SIWFN w/ 2414 BWTR.

Daily Cost: \$0**Cumulative Cost:** \$167,880

6/10/2010 Day: 3**Completion**

NC #2 on 6/10/2010 - MIRUSU, X - Over BOPS, P/U Tbg - 5:30 To 6:00 AM C/Trvl, 6:00 AM MIRUSU, OWU, R/D Camron BOPS, R/U Wellhead, R/U Weatherford BOPS, P/U & TIH W/- Bit , Bit Sub, 130- Jts Tbg, SWI, CSDFN @ 7:30 PM, 7:30 To 8:00 PM C/Trvl.

Daily Cost: \$0**Cumulative Cost:** \$178,823

6/11/2010 Day: 4**Completion**

NC #2 on 6/11/2010 - Drill Up Plgs, Swab Wellbore - 5:30 To 6:00 AM C/Trvl, 6:00 AM OWU, P/U & TIH To Plg #1 @ 4560', 5' Of Fill On Plg, R/U Weatherford Power Swvl, Drill Out Plg, 34 Min Drill Time, Swvl In The Hole To Plg #2 @ 5290', 22' Of Fill On Plg, 36 Min Drill Time, Swvl In The Hole To Plg #3 @ 5470', 28' Of Fill On Plg, 28 Min Drill Time, Swvl In The Hole To Plg #4 @ 6130', 25' Of Fill On Plg, 31 Min Drill Time, Swvl In The Hole To PBTD @ 6544', 32' Of Fill On PBTD, Circ Wellbore Clean For Approx. 1 Hr, POOH W/- 5 Jts Tbg, R/U Sandline, Swab 170 Bbls Fluid Back, Was Bringing Back Approx. A Cup Of Sand Each Run, BFL @ Surface, FFL @ 1000', POOH W/- 10 Jts Tbg, SWI, CSDFN @ 7:30 PM, 7:30 To 8:00 PM C/Trvl.

Daily Cost: \$0**Cumulative Cost:** \$237,283

6/12/2010 Day: 5**Completion**

NC #2 on 6/12/2010 - Round Trip Tbg, R/D Weatherford BOPS, R/U Wellhead, Start TIH W/- Rod String - 5:30 To 6:00 AM C/Trvl, 6:00 AM OWU, TIH W/- 10- Jts Tbg, RIH W/- Sandline, Make 4 Swab Runs, Ony Had A Little Bit Of Sand, R/D Sandline, TIH W/- 5- Jts Tbg To PBTD, 9' Of Fill On PBTD, Circ Wellbore Clean For Approx. 1 Hr, L/D 11- Jts Tbg, POOH W/- 198- Jts Tbg, Bit Sub & Bit, P/U & TIH W/- NC, 2- Jts Tbg, SN, 1- Jt Tbg, TA, 195- Jts Tbg, Set TA In 18000 Lbs Tension, R/D Weatherford BOPS, R/U Wellhead, X - Over For Rods, P/U & Stroke Test W/- Central Hydraulics 2 1/2 x 1 1/2 x 21 x 24' RHAC Rod Pump, TIH W/- Pmp, 6- 1 1/2" x 25' Wt Bars, 20- 3/4" Guided Rods, SWI, CSDFN @ 3:30 PM, 3:30 To 4:00 PM C/Trvl.

Daily Cost: \$0

Cumulative Cost: \$241,734

6/14/2010 Day: 6**Completion**

NC #2 on 6/14/2010 - Finish P/U Rod String, PWOP - 5:30 To 6:00 AM C/Trvl, 6:00 AM OWU, TIH W/- 120- 3/4" Plain Rods, 100- 7/8" Guided Rods, 1- 8', 1- 2' x 7/8" Pony Subs, 1 1/2" x 26' Polished Rod, R/U Pmp Unit, R/U Rig Pmp To Tbg, Fill & Test To 800 Psi Using Pmp Unit, Took 6 Bbls Wtr To Fill, PWOP @ 1:30 PM, 122" STL, 5 SPM. FINAL REPORT **Finalized**

Daily Cost: \$0

Cumulative Cost: \$264,951

Pertinent Files: Go to File List

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB NO. 1004-0137
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. Type of Well ☒ Oil Well ☐ Gas Well ☐ Dry ☐ Other
b. Type of Completion: ☒ New Well ☐ Work Over ☐ Deepen ☐ Plug Back ☐ Diff. Resvr.,
Other: _____

2. Name of Operator
NEWFIELD EXPLORATION COMPANY

3. Address
1401 17TH ST. SUITE 1000 DENVER, CO 80202

3a. Phone No. (include area code)
(435)646-3721

4. Location of Well (Report location clearly and in accordance with Federal requirements)*

At surface 464' FSL & 686' FWL (NW/SW) SEC. 29, T4S, R1E

At top prod. interval reported below

At total depth 6600'

14. Date Spudded
05/20/2010

15. Date T.D. Reached
05/29/2010

16. Date Completed 06/14/2010
☐ D & A ☒ Ready to Prod.

17. Elevations (DF, RKB, RT, GL)*
4906' GL 4918' KB

18. Total Depth: MD 6600'
TVD

19. Plug Back T.D.: MD 6544'
TVD

20. Depth Bridge Plug Set: MD
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)

DUAL IND GRD, SP, COMP. DENSITY, COMP. NEUTRON, GR, CALIPER, CMT BOND

22. Was well cored? ☒ No ☐ Yes (Submit analysis)
Was DST run? ☒ No ☐ Yes (Submit report)
Directional Survey? ☒ No ☐ Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cement Depth	No. of Sks. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4"	8-5/8" J-55	24#	0	315'		160 CLASS G			
7-7/8"	5-1/2" J-55	15.5#	0	6592'		325 PRIMLITE		40'	
						425 50/50 POZ			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-7/8"	EOT @ 6238'	TA @ 6139'						

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Green River			6153-6160' CP4	.36"	3	21
B) Green River			5998-6094' CP1 CP2 CP3	.36"	3	36
C) Green River			5313-5383' D3 C	.36"	3	30
D) Green River			5219-5232' D2	.36"	3	30

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Depth Interval	Amount and Type of Material
6153-6160'	Frac w/ 24360#'s 20/40 sand in 207 bbls of Lightning 17 fluid.
5998-6094'	Frac w/ 53000#'s 20/40 sand in 402 bbls of Lightning 17 fluid.
5313-5383'	Frac w/ 100496#'s 20/40 sand in 605 bbls of Lightning 17 fluid.
5219-5232'	Frac w/ 60558#'s 20/40 sand in 367 bbls of Lightning 17 fluid.

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
6-15-10	6-29-10	24	→	78	0	22			2-1/2" x 1-1/2" x 21' x 24' RHAC Pump
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→					PRODUCING	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

*(See instructions and spaces for additional data on page 2)

RECEIVED

JUL 06 2010

DIV. OF OIL, GAS & MINING

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

29. Disposition of Gas (Solid, used for fuel, vented, etc.)

USED FOR FUEL

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

GEOLOGICAL MARKERS

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
				GARDEN GULCH MRK GARDEN GULCH 1	4160' 4336'
				GARDEN GULCH 2 POINT 3	4453' 4743'
				X MRKR Y MRKR	4955' 4989'
				DOUGALS CREEK MRK BI CARBONATE MRK	5126' 5429'
				B LIMESTON MRK CASTLE PEAK	5596' 5940'
				BASAL CARBONATE WASATCH	6323' 6445'

32. Additional remarks (include plugging procedure):

Stage 5: Green River Formation (GB2) 4489-4499', .36" 3/30 Frac w/ 49808#'s of 20/40 sand in 307 bbls of Lightning 17 fluid

33. Indicate which items have been attached by placing a check in the appropriate boxes:

- ☐ Electrical/Mechanical Logs (1 full set req'd.)
 ☐ Geologic Report
 ☐ DST Report
 ☐ Directional Survey
☐ Sundry Notice for plugging and cement verification
 ☐ Core Analysis
☒ Other: Drilling Daily Activity

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Lucy Chavez-Naupoto

Title Administrative Assistant

Signature

Date 07/01/2010

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 3)

(Form 3160-4, page 2)

Daily Activity Report

Format For Sundry

UTE TRIBAL 12-29-4-1E**3/1/2010 To 7/30/2010****UTE TRIBAL 12-29-4-1E****Waiting on Cement****Date:** 5/22/2010

Ross #29 at 315. Days Since Spud - On 5/20/10 Ross Rig #29 spud UT 12-29-4-1E, drilled 315' of 12 1/4" hole, and ran 7 jts 8 5/8" - 8 5/8" casing w/ 160 sks Class "G" + 2% CaCl2 + 0.25#/sk Cello Flake at 15.8 ppg w/ 1.17 yield. - Returned 7 bbls to pit. - casing (guide shoe, shoe jt, baffle plate, 6 jts) set @ 315.49' KB. On 5/22/10 BJ Services cemented

Daily Cost: \$0**Cumulative Cost:** \$40,016**UTE TRIBAL 12-29-4-1E****Pressure Testing****Date:** 5/26/2010

Capstar #329 at 315. 0 Days Since Spud - Test Bop; Kelly valve, Choke inside and out side valves, blind rams and pipe rams, kill line valve - MIRU - 2000psi for 10min. Annular 1500psi for 10 min. Surface casing 1500psi for 30min.

Daily Cost: \$0**Cumulative Cost:** \$110,836**UTE TRIBAL 12-29-4-1E****Drill 7 7/8" hole with fresh water****Date:** 5/27/2010

Capstar #329 at 3778. 1 Days Since Spud - Drill 7 7/8 w/fresh water from 258' to 1017' WOB/15, TRPM/155, TGPM/420, AVG ROP/151 - Rig service - Drill 7 7/8 w/fresh water from 1017' to 3778' WOB/20, TRPM/155, TGPM/420, AVG ROP/162 - Pick up BHA

Daily Cost: \$0**Cumulative Cost:** \$137,426**UTE TRIBAL 12-29-4-1E****Drill 7 7/8" hole with fresh water****Date:** 5/28/2010

Capstar #329 at 6005. 2 Days Since Spud - Drill 7 7/8 w/fresh water from 5499' to 6005' WOB/20, TRPM/155, TGPM/420, AVG ROP/126.5 - Drill 7 7/8 w/fresh water from 3778' to 4230' WOB/20, TRPM/155, TGPM/420, AVG ROP/129 - Rig service function test BOP and crown-o-matic - Drill 7 7/8 w/fresh water from 4230' to 4320' WOB/20, TRPM/155, TGPM/420, AVG ROP/45 Pason failure - drilling by hand while waiting for pason - Fix Pason automatic driller - Drill 7 7/8 w/fresh water from 4230' to 5499' WOB/20, TRPM/155, TGPM/420, AVG ROP/110.35 - Work on Pason automatic driller

Daily Cost: \$0**Cumulative Cost:** \$154,261**UTE TRIBAL 12-29-4-1E****Drill 7 7/8" hole with fresh water****Date:** 5/29/2010

Capstar #329 at 6600. 3 Days Since Spud - Circulate - Drill 7 7/8 w/fresh water from 6314' to 6600' WOB/20, TRPM/155, TGPM/420, AVG ROP/95.3 - Replace input chain - Rig service function test BOP and crown-o-matic - Lay down DP and BHA - Rig up Halliburton and run in hole. Tools went to bottom and started to pull tight. Work tight hole - wireline truck. - Log well. - Drill 7 7/8 w/fresh water from 6005' to 6314' WOB/20, TRPM/155, TGPM/420, AVG ROP/44.14

Daily Cost: \$0

Cumulative Cost: \$187,833

UTE TRIBAL 12-29-4-1E

Waiting on Cement

Date: 5/30/2010

Capstar #329 at 6600. 4 Days Since Spud - R/U and run 151 jts 5 1/2" 15.50# J-55 casing set at 6592'. Float collar was at 6545'. - Finish logging and rig down Halliburton Wireline. - Clean mud tanks. Released rig at 12:00 AM 5/30/2010 - Nipple down and set 5 1/2" slips w/ 120,000# tension - Mixed @ 14.4 ppg yeild @ 1.24 Returned 15 bbls of cement to reserve pit. Bumped plug to 2150 psi - yield @ 3.54 Then tail of 425 sk 50:50:2+3%KCL+0.5%EC-1+.25# SK CF+.05#SF+.3SMS+FP-6L - Circulate - CMT w/BJ Pump 325 sks PL II +3% KCL +5#CSE+0.5#CF+2#KOL+.5SMS+FP+SF mixed @ 11ppg **Finalized**

Daily Cost: \$0

Cumulative Cost: \$300,637

Pertinent Files: Go to File List

NOTICE OF VIOLATION
STATE OF UTAH
OIL AND GAS CONSERVATION ACT

- The Board may authorize recovery of fines of \$5,000 per day for violation of any rule, or order and up to \$10,000.00 per day for willful violations U.C.A 40-6-11, part 4

UTAH DEPARTMENT OF NATURAL RESOURCES
Division of Oil, Gas & Mining
Oil and Gas Program
1594 West North Temple, Suite 1210, Box 145801
Salt Lake City, UT 84114-5801
(801) 538-5340 Phone
(801) 359-3940 Fax

Well(s) or Site(s): 1) UTE TRIBAL 12-29-4-1E API #: 43-047-39333

This notice shall remain in effect until it is modified, terminated, or vacated by a written notice of an authorized representative of the director of the Division of Oil, Gas and Mining. Failure to comply with this notice will result in the Division pursuing further actions against said operator. Further actions may include initiation of agency actions to order full cost bonding and plugging and abandonment of wells and requests for bond forfeiture and civil penalties.

Compliance Deadline: May 10, 2013

Date of Service Mailing: April 18, 2013

Certified Mail No.: 7010 1670 0001 4810 4031



Division Representative Signature

Operator Representative (if presented in person)

cc: Compliance File

Well File

Mike Johnson, Board of Oil, Gas and Mining

James Jensen, Board Chair

Steve Alder, DOGM

Jerry Kenczka, Vernal BLM

Jennifer Casady, Utah Tax Commission

1/2013

UTAH DEPARTMENT OF NATURAL RESOURCES
Division of Oil, Gas & Mining
Oil and Gas Program
1594 West North Temple, Suite 1210
P.O. Box 145801
Salt Lake City, UT 84114-5801
(801) 538-5340 Phone

**SATISFACTORY CLOSURE OF VIOLATION
STATE OF UTAH
OIL AND GAS CONSERVATION ACT**

TO THE FOLLOWING OPERATOR:

Name: Newfield Production Company
Attention: Kirby Carroll
Mailing Address: 1001 17th Street, Suite 2000
Denver, CO 80202

29 AS 1E

Well or Site: (1) Ute Tribal 10-6-5-2E	API#: <u>43-047-40582</u>
(2) Ute Tribal 12-29-4-1E	API#: <u>43-047-39333</u>
(3) Ute Tribal 16-29-4-1E	API#: <u>43-047-39334</u>

THIS DOCUMENT BRINGS CLOSURE TO A NOTICE OF VIOLATION(S) SENT TO THE ABOVE OPERATOR AND DATED: April 18, 2013

The Utah Division of Oil, Gas and Mining hereby acknowledges that the alleged violation of the act, rules or permit conditions as described below (as pertaining to the Utah Oil and Gas Conservation Act, Section 40-6 et. Seq., Utah Code Annotated, 1953, as amended), has been satisfactorily resolved in a manner acceptable to the division.


Description of Violation(s): Rule R649-3-20, Gas Flaring or Venting – According to Rule R649-3-20, produced gas from an oil well can only be flared up to 3000 Mcf in the first calendar month of production and 1800 Mcf per month thereafter without approval. If an operator desires to produce a well for the purpose of testing and evaluation beyond the time allowed by R649-3-19 and vent or flare gas in excess of the aforementioned limits of gas venting or flaring, the operator shall make written request for administrative action by the Division to allow gas venting or flaring during such testing and evaluation

After auditing the flared volumes for Newfield Production Company (Newfield) on February 25, 2013, the Division found that these wells flared over 1800 mcf/month for an extended period of time between September of 2011 and January of 2013. Well # 1 listed above flared above the referenced amount most of the referenced timeframe, but not the entire time (see NOV's for further details). There was also some question on the disposition reports for these wells and other wells in these gathering systems being accurate.

The following action was taken by the operator: Newfield has taken the following actions to be compliant with the actions requested by the Division in the Notice of Violation:

1. Newfield has alleviated noncompliance by restricting production to flare gas within the allowable limit until such time pipelines can be connected to the Newfield gathering system.
2. Newfield has provided a more accurate measurement of gas used on site by the use of manufacturers' estimated equipment gas usage to more accurately reflect gas used on site.
3. Newfield has amended monthly production/disposition reports to more accurately state production/disposition volumes, volumes used on site, and flare volumes.

No further action will be taken by the Division concerning this matter. **MATTER CLOSED:** June 8, 2015

Division Representative Signature:  Date: 6/9/2015

Name and Title: Dustin Doucet, Petroleum Engineer Phone: 801-538-5281

cc: Compliance File
Well File

Ruland Gill, Chairman, Board of Oil, Gas and Mining
Mike Johnson, Board of Oil, Gas and Mining Counsel
Steve Alder, DOGM Counsel
Jennifer Casady, Utah Tax Commission
Jerry Kenczka, Vernal BLM